

EDITION EDITION EDITION
6th
EDITION EDITION EDITION



cishipping.com



THE PASSENGER YACHT CODE (PYC)

SIXTH EDITION – JANUARY 2016

This Code of Practice applies to pleasure yachts of any size, in private use or engaged in trade, which carry more than 12 but not more than 36 passengers and which do not carry cargo.

Head Office – Cayman Islands

133 Elgin Avenue
P.O. Box 2256
Grand Cayman KY1-1107
CAYMAN ISLANDS
Tel: +1 345-949-8831
Fax: +1 345-949-8849
Email: cisrky@cishipping.com

Representative – London

Cayman Islands Government Office
6 Arlington Street
Piccadilly
London, UK
SW1A 1RE
Tel: +44-7825-313-181
Fax: +44-2074-917-944
Email: cisrlondon@cishipping.com

European Regional Office - United Kingdom

1st Floor, Vanbrugh House
Grange Drive, Hedge End
Southampton, SO30 2AF,
England, UK
Tel: + 44 1489-799-203
Fax: + 44 1489-799-204
Email: cisruk@cishipping.com

Representative - Japan

1-20-21-1003, Chuo-ko, Chuo-ku,
Chiba 260-0024
Japan
Tel / Fax: +81 43 247 8441
Email: cisrjp@cishipping.com

Representative Office - Greece

107-109 Vasileos Pavlou Street
Voula, GR 166 73
Athens, Greece
Tel: +30-210-965-9700
Fax: +30-210-899-6040
Email: cisrgr@cishipping.com

Representative Office - France

6 Rue Joseph Bermond
06560 Valbonne
France
Tel: +33 (0) 489027609
Email: cisrfr@cishipping.com

Representative Office – United States

750 West Sunrise Boulevard
Suite 201, Fort Lauderdale, FL 33311
Tel: (954) 332-9786
Fax: (954) 256-5062
Email: cisrfl@cishipping.com

Representative - Singapore

8 Marina View, Asia Square Tower 1
Level 07-04, Singapore 018960
Tel: +65-9760-4026
Email: cisrsg@cishipping.com

Representative - Panama

Plaza Obarrio Building
Suite 205, Samuel Lewis Avenue
PO Box 0830-00913
Panama, Republic of Panama
Tel: +507 6305-4361
Email:
aymard.jimenez@cishipping.com

Representative – Hong Kong

8 Marina View, Asia Square Tower 1
Level 07-04, Singapore 018960
Tel: +65-9760-4026
Email: cisrsg@cishipping.com



THE RED ENSIGN GROUP

A CODE OF PRACTICE FOR YACHTS CARRYING 13 TO 36 PASSENGERS

(THE PASSENGER YACHT CODE)

(SIXTH EDITION – JANUARY 2016)

This Code of Practice applies to pleasure yachts of any size, in private use or engaged in trade, which carry more than 12 but not more than 36 passengers and which do not carry cargo.

*Dedicated to Capt W.Barrie Rial
Chief Advisor Maritime Policy and Legislation Development.
Maritime Authority of the Cayman Islands
15 April 1936 – 29th March 2013*

Contents

Contents	3
<i>Notes To Sixth Edition:</i>	8
<i>Preamble</i>	19
CHAPTER 1 GENERAL	23
1.1 <i>Purpose:</i>	23
1.2 <i>Application:</i>	23
1.3 <i>Definitions:</i>	24
1.4 <i>Survey and Certification:</i>	34
1.5 <i>Casualties:</i>	35
1.6 <i>Review of the Code:</i>	35
1.7 <i>Amendments to international Conventions and related Instruments:</i>	35
1.8 <i>International Conventions and related instruments</i>	35
1.9 <i>Editions of the Code:</i>	35
CHAPTER 2 LOAD LINES	37
2.1 <i>Strength and Construction of Ship:</i>	37
2.2 <i>Application:</i>	37
2.3 <i>Subdivision and Load Line Mark:</i>	38
2.4 <i>Mark of Assigning Authority:</i>	39
2.5 <i>Doors and Openings above the Weather Deck:</i>	40
2.6 <i>Shell Openings Below the Freeboard Deck:</i>	42
2.7 <i>Hatchways and Coamings:</i>	42
2.8 <i>Miscellaneous Openings in Freeboard and Superstructure Decks:</i>	43
2.9 <i>Ventilators:</i>	44
2.10 <i>Air Pipes:</i>	44
2.11 <i>Scuppers, Inlets and Discharges:</i>	45
2.12 <i>Side Scuttles and Windows:</i>	45
2.13 <i>Garbage Chutes etc.:</i>	50
2.14 <i>Spurling Pipes and Cable Lockers:</i>	50
2.15 <i>Freeing Ports and Recesses:</i>	51
2.16 <i>Protection of the Crew:</i>	52
2.17 <i>Reduced Sill Heights & Coaming (summary of requirements from earlier sections)</i>	53
CHAPTER 3 APPLICATION OF OTHER INTERNATIONAL CONVENTIONS AND NATIONAL LEGISLATION	55
3.1 <i>Conventions - General:</i>	55
3.2 <i>Navigation Lights:</i>	55
3.3 <i>Prevention of Pollution:</i>	56
3.4 <i>Anti-Fouling Convention:</i>	56
3.5 <i>Ballast Water Convention:</i>	56
3.6 <i>Bunkers Convention:</i>	56

REG 13-36 PASSENGER YACHT CODE

3.7	<i>Ships using low-flashpoint fuels:</i>	56
3.8	<i>National Legislation:</i>	57
CHAPTER 4 CONSTRUCTION, SUBDIVISION AND STABILITY		59
PART I - GENERAL		59
4.1	<i>Strength of Ship and Subdivision - General:</i>	59
4.2	<i>Application of SOLAS Provisions – General:</i>	59
PART II STABILITY		61
4.3	<i>Intact Stability and Information:</i>	61
4.4	<i>Stability Information to be supplied to the Master:</i>	61
4.5	<i>Required Subdivision Index R:</i>	63
4.6	<i>Attained Subdivision Index A:</i>	63
4.7	<i>Calculation of the Factor p_i:</i>	65
4.8	<i>Calculation of the Factor s_i:</i>	68
4.9	<i>Permeability:</i>	73
4.10	<i>Requirements Concerning Passenger Ship Stability:</i>	74
PART III SUBDIVISION, WATERTIGHT AND WEATHERTIGHT INTEGRITY		75
4.11	<i>Double Bottoms:</i>	75
4.12	<i>Construction of Watertight Bulkheads:</i>	77
4.13	<i>Initial Testing of Watertight Bulkheads, etc.:</i>	77
4.14	<i>Peak and Machinery Space Bulkheads, Shaft Tunnels, etc.:</i>	77
4.15	<i>Openings in Watertight Bulkheads below the Bulkhead Deck:</i>	79
4.16	<i>Openings in the Shell Plating below the Bulkhead Deck:</i>	86
4.17	<i>Construction and Initial Testing of Watertight Doors, Sidescuttles, etc.:</i>	88
4.18	<i>Construction and Initial Testing of Watertight Decks, Trunks, etc.:</i>	88
4.19	<i>Internal Watertight Integrity above the Bulkhead Deck:</i>	89
PART IV SUBDIVISION LOADLINE ASSIGNMENT		91
4.20	<i>Assigning, Marking and Recording of Subdivision Load Lines:</i>	91
PART V STABILITY MANAGEMENT		93
4.21	<i>Damage Control Information:</i>	93
4.22	<i>Loading of Passenger Ships:</i>	93
4.23	<i>Periodical Operation and Inspection of Watertight doors, etc.:</i>	94
4.24	<i>Prevention and Control of Water Ingress, etc.:</i>	94
PART VI ALTERNATIVE SUBDIVISION AND STABILITY STANDARDS FOR PASSENGER YACHTS NOT EXCEEDING 80 METRES IN LENGTH (L) WHERE COMPLIANCE WITH REGULATION 6 AND 7 OF SOLAS II-1 PART B-1 PROVES IMPRACTICABLE		99
4.25	<i>Floodable Length:</i>	99
4.26	<i>Permeability:</i>	99
4.27	<i>Permissible Length of Compartments:</i>	100
4.28	<i>Special Requirements concerning Subdivision:</i>	103

4.29	<i>Stability in Damaged Condition:</i>	105
PART VII ADDITIONAL PROVISIONS FOR VESSELS PERMITTED TO CARRY DAVIT LAUNCHED LIFERAFTS AND MARINE EVACUATION SYSTEMS IN LIEU OF LIFEBOATS		
4.30	<i>Enhanced Survivability for Vessels provided with Davit Launched Liferafts or Davit Launched Liferafts and Marine Evacuation Systems in lieu of Lifeboats in accordance with Annex 3:</i>	111
4.31	<i>Maximum Floodable Length for vessels of 80 metres in length and over</i>	112
CHAPTER 5 MACHINERY AND ELECTRICAL INSTALLATIONS AND UNATTENDED MACHINERY SPACES		
5.1	<i>Machinery Installations:</i>	113
5.2	<i>Electrical Installations:</i>	113
5.3	<i>Periodically Unattended Machinery Spaces:</i>	113
CHAPTER 6 FIRE PROTECTION, DETECTION AND EXTINCTION		
6.1	<i>Fire Safety Objectives and Functional Requirements:</i>	115
6.2	<i>Probability of Ignition:</i>	116
6.3	<i>Fire Growth Potential:</i>	122
6.4	<i>Smoke Generation Potential and Toxicity:</i>	126
6.5	<i>Detection and Alarm:</i>	127
6.6	<i>Control of Smoke Spread:</i>	130
6.7	<i>Containment of Fire:</i>	131
6.8	<i>Fire Fighting:</i>	151
6.9	<i>Structural Integrity:</i>	161
6.10	<i>Notification of Crew and Passengers:</i>	163
6.11	<i>Means of Escape:</i>	163
6.12	<i>Operational Readiness and Maintenance:</i>	169
6.13	<i>Instructions, On-board Training and Drills:</i>	170
6.14	<i>Operations:</i>	172
6.15	<i>Alternative Design and Arrangements:</i>	173
6.16	<i>Helicopter Facilities:</i>	174
6.17	<i>Protection of Garage Spaces:</i>	178
6.18	<i>Safety Centre:</i>	181
CHAPTER 7 LIFE-SAVING APPLIANCES AND ARRANGEMENTS		
7.1	<i>Application:</i>	183
7.2	<i>General Requirements:</i>	183
7.3	<i>Stowage of Survival Craft:</i>	184
7.4	<i>Stowage of Rescue Boats:</i>	185
7.5	<i>Stowage of Marine Evacuation Systems:</i>	185
7.6	<i>Survival Craft Launching and Recovery Arrangements:</i>	185
7.7	<i>Rescue Boat Embarkation, Launching and Recovery Arrangements:</i>	188
7.8	<i>Survival Craft and Rescue Boat Embarkation Arrangements:</i>	189
7.9	<i>Communications:</i>	189

REG 13-36 PASSENGER YACHT CODE

7.10	<i>Personal Life Saving Appliances:</i>	191
7.11	<i>Muster List and Emergency Instructions:</i>	193
7.12	<i>Operating Instructions:</i>	195
7.13	<i>Manning of Survival Craft and Supervision:</i>	195
7.14	<i>Survival Craft Muster Stations and Embarkation Arrangements:</i>	196
7.15	<i>Launching Stations:</i>	197
7.16	<i>Line Throwing Appliance:</i>	197
7.17	<i>Emergency Procedures, Training and Drills:</i>	197
7.18	<i>Frequency of Drills and Involvement of Crew and Passenger:</i>	201
7.19	<i>Training Manual and On-board Training Aids:</i>	201
7.20	<i>Operational Readiness, Maintenance and Inspection:</i>	202
7.21	<i>Survival Craft and Rescue Boats to be Carried:</i>	206
7.22	<i>Time to Launch Survival Craft:</i>	207
7.23	<i>Marshalling of Liferafts:</i>	207
7.24	<i>Decision Support System for Masters:</i>	207
7.25	<i>Information on Passengers:</i>	208
7.26	<i>Alternative Design and Arrangements:</i>	209
7.27	<i>Recovery of persons from the water</i>	210
CHAPTER 8 RADIOCOMMUNICATIONS, SAFETY OF NAVIGATION, INTERNATIONAL SAFETY MANAGEMENT AND MARITIME SECURITY		211
8.1	<i>Radiocommunications:</i>	211
8.2	<i>Safety of Navigation:</i>	211
8.3	<i>International Safety Management:</i>	211
8.4	<i>Maritime Security:</i>	211
CHAPTER 9 ACCOMMODATION AND RECREATIONAL FACILITIES-DESIGN AND CONSTRUCTION:		213
9.1	<i>ILO Maritime Labour Convention</i>	213
CHAPTER 10 HEALTH AND SAFETY		215
10.1	<i>Application:</i>	215
CHAPTER 11 SHIP-SHORE TRANSFER OF PERSONNEL		217
11.1	<i>Tenders (Dinghies):</i>	217
11.2	<i>Helicopters:</i>	217
11.3	<i>Pilot Boarding Arrangements:</i>	218
11.4	<i>Gangways, Passerelles and Accommodation Ladders:</i>	218
CHAPTER 12 MANNING, CERTIFICATION AND HOURS OF WORK		221
12.1	<i>Application:</i>	221
12.2	<i>Purpose:</i>	221
12.3	<i>Safe Manning:</i>	221
12.4	<i>Application for a Safe Manning Document:</i>	223
12.5	<i>Qualifications and Training:</i>	223

REG 13-36 PASSENGER YACHT CODE

12.6	<i>Medical Fitness:</i>	228
12.7	<i>Hours of Work and Rest:</i>	229
CHAPTER 13 MEDICAL CARE AND CARRIAGE OF MEDICAL STORES.....		231
13.1	<i>Medical Care for Seafarers:</i>	231
13.2	<i>Provision of On-board Medical Care:</i>	231
13.3	<i>Medical Cabinet:</i>	232
13.4	<i>Carriage of Medical Stores:</i>	232
13.5	<i>Standards of Medical Stores:</i>	233
13.6	<i>Carriage of Medical Guides:</i>	233
13.7	<i>Medical Advice:</i>	233
13.8	<i>Inspection of Medicines and Medical Stores:</i>	233
13.9	<i>Carriage of Doctors or Medically Trained Personnel:</i>	233
CHAPTER 14 REQUIREMENTS FOR SAILING VESSELS		235
14.1	<i>General</i>	235
14.2	<i>Application</i>	235
14.3	<i>Operating Restrictions</i>	235
14.4	<i>Water Freeing Arrangements</i>	235
14.5	<i>Intact Stability</i>	235
14.6	<i>Intact Stability Monohulls</i>	236
14.7	<i>Damage Stability</i>	239
14.8	<i>Equipment Numeral</i>	239
14.9	<i>Machinery and Electrical Installations</i>	240
14.10	<i>Fire Protection, Detection and Extinction</i>	240
14.11	<i>Life-Saving Appliances and Arrangements</i>	241
14.12	<i>Emergency Procedures, Training and Drills</i>	241
14.13	<i>Safety of Navigation</i>	241
14.14	<i>Sailing Operations Manual</i>	242
14.15	<i>Health and Safety</i>	243
14.16	<i>Manning Certification</i>	243
14.17	<i>Masts and Spars and Standing Rigging</i>	244
14.18	<i>Sails</i>	244
ANNEX 1 CLASSIFICATION SOCIETIES AND OTHER BODIES APPOINTED AS RECOGNIZED ORGANIZATIONS BY THE NATIONAL MARITIME ADMINISTRATION CONCERNED.		245
ANNEX 2 TECHNICAL STANDARDS FOR HELICOPTER LANDING AREAS AND HELICOPTER OPERATING STANDARDS.		247
ANNEX 3 TABLE SUMMARISING CATEGORIES OF PASSENGER YACHT AND STANDARDS OF STABILITY AND SURVIVABILITY, LSA SCALES, MAXIMUM PERSONS CARRIED AND OTHER RELATED MATTERS.....		249
ANNEX 4 GUIDANCE MATERIALS MATRIX FOR ACCOMMODATION SPACES, SERVICE SPACES AND CONTROL STATIONS.....		250

Notes To Sixth Edition:

(i) This Sixth Edition of the Passenger Yacht Code has been prepared following feedback from the yachting sector and from REG Members, based on the operation of the Code since the promulgation of the First Edition in November 2010 and the annual Meeting of Industry Stakeholders during the Passenger Yacht Code Industry Working Group.

(ii) The issues raised have been discussed within the REG and agreement reached on what changes should be made. The opportunity has also been taken to correct some minor typographical errors.

(iii) It has always been the intention that the Code should be revised on an annual basis and this Sixth Edition represents the fifth of such revisions. A summary of all of the revisions made to date are given in the following Table.

(iv) During the period between revisions any important or critical changes to the provisions of the Code, which cannot wait until the next Edition of the Code is promulgated, will be implemented through the issue of a series of “Notices of Interim Changes to the Passenger Yacht Code”.

TABLE SUMMARISING THE AMENDMENTS INCORPORATED SINCE THE FIRST EDITION:

Edition	SECTION ETC. NO.	NATURE OF AMENDMENT	ADDITIONAL INFORMATION
2 nd	Notes to Second Edition.	Explanatory Notes and Summary of Amendments inserted.	
3 rd	Notes to Third Edition.	Explanatory Notes and Summary of Amendments inserted.	
4 th	Notes to Fourth Edition	Explanatory Notes and Summary of Amendments inserted.	
5 th	Notes to Fifth Edition	Explanatory Notes and Summary of Amendments inserted.	
6 th	Notes to Sixth Edition	Explanatory Notes and Summary of Amendments inserted.	
5 th	Preamble	Changed to reflect the removal of the 3000GT limit from LY3	
6 th	Preamble	Changed to reflect the addition of provisions for sailing vessels	
2 nd	Preamble	Paragraph 2 slightly modified to define the Code and its related terminology. In paragraph 21 the Annex VI Protocol to MARPOL (Air Pollution) and the Anti- Fouling Systems (AFS) Conventions have been added to the list of other Conventions which may need to be complied with.	
4 th	Preamble 17	Deleted	Moved to section 1.2(6)
5 th	Preamble 20(1)	New Paragraph Added	To reflect the implementation of the Polar Code.
4 th	Table P-1	Table Deleted and subsequent references changed	Replaced with Annex 3

5 th	1.2(1)	Clarification on the maximum number of persons carried onboard	99 deleted and replaced with 120
5 th	1.2(1)	Editorial to clarify the use of the Code by REG members	
4 th	1.2(6)	New subsection	This is reflecting the preamble text regarding total numbers of persons onboard
4 th	Table 1-1	Table Deleted and subsequent references changed	Replaced with Annex 3
3 rd	1.3	Clarification of the expressions “should” and “shall” in the context of the code	
6 th	1.3	“Hazardous area” definition added	
6 th	1.3	“IGF Code” definition added	To reflect new section in 3.7
4 th	1.3	“Margin Line” definition added	
6 th	1.3	“Margin Line” definition amended	Definition changed to the latest version (SOLAS 2004) before removal from SOLAS
5 th	1.3	"Sailing vessel" included in preparation for sailing vessel chapter	Same definition as LY3
6 th	1.3	“Fire damper” & “Smoke damper” definition added	MSC.365(93) definitions included
5 th	1.3(1)(c) & (d)	Missing text from SOLAS added	
6 th	1.4(1)	Editorial	Updated IMO reference
5 th	1.4(2)	Removal of national annex reference as never included in the Code	
4 th	1.4(3) Table	‘Admin’ added to stability book survey authority	
5 th	1.4(3)	Surveying and certifying authority columns deleted and additional text to compensate for this added to the chapeau.	
4 th	1.8	New section added	Explanation that passenger ship standard apply to the Code
4 th	1.9	New section added	Application dates and keel laying dates explained for implementation of the Code
5 th	1.9	Change in keel laying application date of this edition of the Code	
6 th	1.9	Change in keel laying application date of this edition of the Code	
4 th	Figure 2.1	Load Line Mark figure amended	Freeboard measured from the top of the lines
6 th	Figure 2.1	Description of figure added	Clarifying the intent of the diagram
5 th	2.3(11)	Sub sequential numbering amendment from 4.3(4) deletion	
3 rd	2.6(1)	Pilot doors added as an example of an opening	
4 th	2.6(1)	Cross reference added	Clarifies that Pilot doors also have a relevant section
4 th	2.7(4)(g)	New paragraph	Relaxation of the requirement to comply with enhanced survivability where flush hatches are for emergency or not at sea use
5 th	2.9(2)(a) & (b)	Editorial change for the vessel size	“less” & “more” inverted
5 th	2.9 (5) (a) & (b)	Text reverted to that of the Load Line Convention	Removal of the word “freeboard”
3 rd	2.12(5)	Editorial to clarify the subsequent paragraph requirements	

5 th	2.12(5)(a)	Editorial amendment to the cross reference	
3 rd	2.12(6)	Editorial numbering convention	
3 rd	2.12(6)(a)	Explanation to what equivalency will be measured against	
3 rd	2.12(12)	Windows included in requirement	
4 th	2.12(14)	Inclusion of Loadline text from II/23(10)	
5 th	2.12(16)	Changes to the required design pressure to be tested to following the 2014 Windows Working Group recommendation	Reduced from 5 to 4 and references to ISO standards included
5 th	2.12(16)(b)	Deleted	As per the recommendations of the 2014 Windows Working Group as no longer required
4 th	2.12(9)(c)	Inclusion of PY-2 for clarity	
5 th	2.12(17)	Wording amended to reflect the use of Class or National standards	
5 th	2.12(19)	Alignment of text with Load Line	Replacement of the term “Storm Shutters” with “Storm Covers” and a new footnote to add an explanation of deadlights and storm covers.
5 th	2.12(19)(d)	Changes to the required design pressure for the dispensation of storm shutters following the 2014 Windows Working Group recommendation	A factor of 1.5 to be applied
5 th	2.12(22)	Requirements for bonded in windows clarified and fire rated requirements added	
6 th	2.12(22) 2.12(22)(d)	Inclusion of glass doors in relaxation for non-combustible construction materials used	
6 th	2.12(22)(d)(ii)	Inclusion of glass doors in relaxation for non-combustible construction materials used	Sealing arrangements also included such as inflatable seals etc.
5 th	2.12(22)(c)	Alignment of text with Load Line	Replacement of the term “Storm Shutters” with “Storm Covers”
4 th	2.16(6)	Inclusion of Classification Society construction requirements	This allows vessels to follow class rules where applicable rather than the Code
3 rd	2.17	New section added	All the requirements for the reduction of sill heights combined into a new section for ease of reading
6 th	2.17	Expansion of the title	Explains that this section is a duplicate of existing requirements
5 th	3.1(f) & (g)	Amendment to reflect that MLC is now in force.	
4 th	3.1(g)	Modified to reflect the application of the MLC	
5 th	3.1(h)	New sub-paragraph added	Amendments to reflect the implementation of the Polar Code.
6 th	3.7	New Section added	Inclusion of reference to the IGF Code for vessels using low-flashpoint fuels
4 th	Table 4-1	Table Deleted and subsequent references changed	Replaced with Annex 3

5 th	4.2(1)	SOLAS application changed	As Chapter 9 is being deleted, the provisions of 4.2(1) to apply to SOLAS as amended is included. Resolution MSC.338(91) (which includes the additions to SOLAS II-1 Part A Regulation 3-12 on the Protection against noise)
2 nd	4.2(2)	Reference to length re-cast as “80m L (i.e. Load Line length)”.	“L” is defined in section 1.3 based on Load Line length but additional clarity has been inserted in section 4.2(2) for the avoidance of doubt in that section.
5 th	4.2(3)	New Paragraph Added	New requirements for the protection against noise and the Code on noise levels on board ship implemented
5 th	4.3(4)	Deletion	Repetition of requirements under 4.29(17)
5 th	4.3(5)	Editorial re-numbering	(5) to (4)
2 nd	4.8(4)	Typographical error. The factor “K” was missing from the first formula and this has been added.	
5 th	4.8(4)	Editorial correction	Φc replaced with Φe
2 nd	4.8(14)	Typographical error. The reference to 4.7(2) in the fourth line was incorrect and has been changed to the correct reference of 4.8(2).	
6 th	4.9(1)	Editorial Correction	‘Void Spaces’ figure updated to reflect SOLAS II-1/7-3 with additional text
3 rd	4.10	Missing paragraph added	Second paragraph for interpolation required. Copied over from SOLAS.
5 th	4.16(3)	Change of reference from bulkhead to freeboard deck following the 2014 Windows Working Group recommendation	
5 th	4.16(4)	Cross reference added to 2.12 following the 2014 Windows Working Group recommendation	
5 th	4.16(5)	Deletion of paragraph	Following the 2014 Windows Working Group recommendation as this is a duplicate of requirements in section 2.12
5 th	4.16(8)	Sub sequential numbering amendment from 4.16(5) deletion	
3 rd	4.16(10)	Inclusion of Convention text for when not operating a continuously Manned Machinery Space.	Location of valves when not operating a continuously Manned Machinery Space included
5 th	4.19(5)	Deletion of paragraph	Following the 2014 Windows Working Group recommendation
5 th	4.24(16)	Sub sequential numbering amendment from 4.16(5) deletion	
5 th	4.29(2)	Editorial correction	Replacement of “intact” with “damage”
6 th	4.29(2)	Editorial correction	Reverted to original text of SOLAS II-2/8.1.2 (2004) to “intact”
5 th	4.29(9)(c)	Editorial correction	Second “=” sign replaced with “+” sign

5 th	4.29(17)(e)	Inclusion of text from 4.3(4) to combine the requirements for draft marks	
4 th	Part VI Preamble	New Chapeau added	Documentary evidence required for the use of the section
5 th	Part VI Preamble	Chapeau expanded	
6 th	4.30(1)	Loading conditions to be considered added	
4 th	4.30(1)(a)	Editorial correction	Paragraph not section
6 th	4.30(1)(a)(i)	Deletion of the phrase “or margin line immersion”	
3 rd	4.30(1)(a)(iii)	Clarification of paragraph cross references to be complied with	This section does not apply where section 4.30(1)(b) is applied
6 th	4.30(1)(a)(iii)	Removal of contradictory wording “in no case”	
4 th	4.30(1)(b)(i)	Editorial correction	Inclusion of text to exclude the sub-subparagraph 4.30(1)(a)(iii) to clarify the intent of paragraph (b)
6 th	6.2(26)	Editorial	Corrected cross reference to 6.16(10)
5 th	6.2(34)	Cross reference added to 6.4(4) & (5)	
5 th	6.3(9)	Editorial correction	Replaced “unattended” with “normally attended”
3 rd	6.3(12)	Expansion of the location from where fire fighting can be conducted from	Relaxation in material restrictions where fires can have water directed onto them from immediately adjacent.
4 th	6.3(12)	New text to allow a risk assessment to be conducted for the fire risk of open decks	Inclusion of reference to the use of MSC.1/Circ.1274 in way of LSA
4 th	6.3(13)	Clarification that the applicable requirements of paragraph (12) only applies to internal spaces	
4 th	6.3(15)	Expansion of the location from where fire fighting can be conducted from	Relaxation in material restrictions where fires can have water directed onto them from immediately adjacent.
4 th	6.3(16)	Clarification that the applicable requirements of paragraph (12) only applies to internal spaces	
2 nd	6.3(17)	Paragraph (d) has been modified to incorporate agreed relaxations for owner and guest spaces. A new subsection (18) has been inserted to clarify what the Administration may take account of in considering these relaxed provisions. Subsequent subsection re-numbered.	
4 th	6.3(17)(c)	Expansion of the location from where fire fighting can be conducted from	Relaxation in material restrictions where fires can have water directed onto them from immediately adjacent.
3 rd	6.3(17) & 6.3(18)	Restructured to clarify the intent and scope	
5 th	6.3(18)	Editorial correction of the cross reference	
4 th	6.3(22)	Expansion of the location from where	Relaxation in material restrictions

		fire fighting can be conducted from	where fires can have water directed onto them from immediately adjacent.
4 th	6.3(23)	New subsection	Amendment to allow the positioning of furniture on LSA decks where a satisfactory assessment as per MSC.1/Circ.1274 has been conducted.
5 th	6.3(23)	List of additional requirements, that if all are complied with, would provide a suitable level of risk to be accepted so that yards and designers can be informed in their development of Circ.1274 evaluations.	
6 th	6.3(23)	Expansion on the areas of external decks to be risk assessed	
5 th	6.4(4) & (5)	Cross reference added to 6.2(34)	Also put in italics due to deviation from SOLAS text
4 th	6.5(11)	Cross reference to new 6.3(23)	
6 th	6.5(11)	Deleted	Intent moved to 6.3(23) as in the incorrect section of the Code.
6 th	6.5(12) to (18)	Editorial	Consequential renumbering from 6.5(11) deletion
5 th	6.5(12)	Clarification of “inaccessible” and “fire risk”	
6 th	6.5(12) (formally (13))	External call points added where overhanging structures exist over sources of ignition.	
3 rd	6.5(14)	Restructured and subdivided to add clarity to requirements	
2 nd	6.7(1)(d)	This chapter has been modified to clarify that the application the definition of “rooms and spaces containing furniture and furnishings of restricted fire risk” only applies with respect to rooms and spaces which form part of an escape route.	
3 rd	6.7(4)(d)	Minimum of 2 main vertical fire zone requirement removed	
5 th	6.7(7)	New footnote to reference MSC/Circ.917	
5 th	6.7(8)	New footnote to reference MSC/Circ.917	
6 th	6.7(10)(b)(i)	Cross reference extended to include new category of space (12)	
3 rd	6.7(15)	Text brought inline with convention text and cross references to relevant category spaces	
3 rd	Table 6.1 & 6.2 footnote f(d)(ii)	Typographical error, A-60 amended to read A-30.	
6 th	Table 6.1 & 6.2 footnotes ^a	Editorial	To be brought in line with SOLAS
6 th	Table 6.1 & 6.2 footnotes ^g & ^h 6.7(10)(b)(vi)(bk)	New category of spaces	“Evacuation stations and external escape routes” added as per SOLAS II-2 Tables 9.1 & 9.2
2 nd	6.7 Tables 6.1 and 6.2	The footnote relating to the asterisk (*) has been modified for clarification,	The new paragraph refers to subsection 6.7(46) and relates to windows facing LSA and

		including the insertion of a new paragraph (d).	embarkation and assembly stations etc., and specifies an “A-30” minimum standard for such windows, as per SOLAS. Previously the standard required was “A-60”.
4 th	6.7 Table 6.1	Editorial correction	Reference to footnote “C” with regard to A-0 bulkheads in columns 4 and 5 of the table removed
4 th	6.7 Table 6.2	Footnotes (d) amended in way of new 6.7(46) and subsequent references changed	Standards for windows moved from the footnote of table 6.2 to the body of the code in paragraph 46
5 th	Table 6.1 & 6.2	Amendments for vessels constructed after 1 July 2014 as per Resolution MSC.338(91)	
5 th	Table 6.1 & 6.2 Footnotes	Inclusion of the same boundary conditions under 6.7(46) I not the bulkhead requirements under the table.	
5 th	6.7(21)(a)	Editorial Correction	Alignment with the original SOLAS text
6 th	6.7(29)(a)	Editorial Correction	Cross reference corrected from
6 th	6.7(33)(b)	Editorial Correction	Cross reference to 2.12(22) added for glass doors
4 th	6.7(33)(c)	Steel Inserted	Clarification that only steel watertight doors need not be insulated
4 th	6.7(33)(d) & (e)	New paragraph	IMO RESOLUTION MSC.269(85) incorporated
6 th	6.7(37)	Inclusion of reference to glass doors and windows	
4 th	6.7(40) (e)	New paragraphs	IMO RESOLUTION MSC.269(85) incorporated
6 th	6.7(44)	Editorial	Expansion of title to reflect content more accurately. No change in intent.
5 th	6.7(45)	Change in the requirements for window retention in frames.	
6 th	6.7(45)	Editorial	More accurate cross reference added. No change in intent.
6 th	6.7(45)	Editorial	Expanded to include glass doors for clarity. No change in intent.
2 nd	6.7(46)	Cross reference back to Tables 6.1 and 6.2 which effectively applies an “A-30” minimum standard for the windows concerned.6.2	
4 th	6.7(46)	Footnotes from table 6.2 added & new paragraph text	Re-organisation of the Code so that the footnotes are now included in the text. New text in the form of (d) gives alternative goal based standard for evacuation routes and window protection
6 th	6.7(46)	Editorial	Text rearranged for clarity. No change in intent.
5 th	6.7(46)(d)(i)	Clarification of the extent of damage when considered failed fire boundaries	
5 th	6.7(47)	Additional reference to glass doors included and the text changed to italics as this is now no longer SOLAS convention text.	

4 th	6.7(48)	Steel Inserted	Clarification that only steel watertight doors need not be insulated
4 th	6.7(56)	New paragraphs	IMO RESOLUTION MSC.269(85) incorporated
5 th	6.7(56) to (60)	Replaced with new paragraph (56) to (68)	IMO RESOLUTION MSC.365(93) Changes to ventilation system requirements as per SOLAS
5 th	6.7(61) to (63)	Replaced with new paragraph (68) to (71)	IMO RESOLUTION MSC.365(93) Changes to arrangement of duct requirements as per SOLAS
3 rd	6.7(62)(d)	Amended to clarify intent and erroneous cross reference removed	
4 th	6.7(64)(b)	Text addition	IMO RESOLUTION MSC.269(85) incorporated
5 th	6.7(64)	Replaced with (72)	IMO RESOLUTION MSC.365(93) Changes to exhaust ducts for galley requirements as per SOLAS
5 th	6.7(73)	New requirements for laundries	Due to the nature of PYC vessels and the very high demand placed on the laundry services, control measures for ventilation systems for main laundries in ships carrying more than 36 passengers have been included into the Code from IMO RESOLUTION MSC.365(93)
6 th	6.7(74)	New requirements for steam rooms	Requirements as per LY3
6 th	6.8(42)	New footnote added	Reference to the UI in MSC/Circ.1120 added
5 th	6.8(49)(a)	Resolution MSC 338(91) changes to SOLAS II-2/10.5.6.3.1	
4 th	6.8(52)	Expansion of the location from where fire fighting can be conducted from	Relaxation in material restrictions where fires can have water directed onto them from immediately adjacent.
5 th	6.8(57)	Resolution MSC 338(91) changes to SOLAS II-2/10.10.1	
5 th	6.8(62)	New section added for two-way portable radiotelephone apparatus for fire fighters	Resolution MSC 338(91) new requirements for fire fighters communications in SOLAS II-2/10.4
2 nd	6.9(4)	Modified to provide for category A machinery space boundaries, including crowns and casing and shell plating forming part of such machinery spaces, to be constructed of aluminium providing certain fire-fighting and insulation provisions are met. Also Footnotes have been inserted expanding the information of the references to the various MSC Circulars which need to be taken into account. Any consequential re-numbering of subsequent sub-sections has been done.	
5 th	6.11(14)	Cross reference editorial	Requirements are no longer in

			6.7(46) but in Table 1 & 2
4 th	6.11(12)	Text added	The inclusion of horizontal stairways to the requirements to stairway enclosures
3 rd	6.11(12)(c)(vi)	Contradictory cross reference to garages removed	6.11(12)(c)(vi) onwards renumbered after deletion
3 rd	6.11(13)	New footnote added	Reference is made to Refer to Unified Interpretations of SOLAS Chapter II-2, the FSS Code, the FTP Code and Related Fire Test Procedures (MSC/Circular.1120)
6 th	6.11(18)	New footnote added	Reference to MSC/Circ.699 added to footnotes
6 th	6.11(25)	Editorial	Reference to (23) added to bring in line with SOLAS
5 th	6.11(30)	New Paragraph added	MSC.365(93) changes to remain in line with the SOLAS requirements. New requirements to protect escape routes
5 th	6.11(31)	New Paragraph added	MSC.365(93) changes to remain in line with the SOLAS requirements. New requirements for escapes from main workshops within machinery spaces
6 th	6.12	Editorial Update	Footnote updated from Circular MSC.1/Circ.850 to MSC.1/Circ1432
5 th	6.13(17)	New Section added for the onboard charging of breathing apparatus cylinders	Resolution MSC 338(91) changes to SOLAS II-2/15.2.2.6
6 th	6.16(5)	Amended to reflect insulations requirements only being over enclosed spaces.	
4 th	6.17(3), (9) & (21)	Inclusion of SOLAS text	Relaxation of gas safe equipment where more air changes per hour are made
4 th	6.17(8)	Expansion of protected areas to include rescue boats where no lifeboats are carried	
5 th	6.17(14)	Clarification of the lobby requirement	
5 th	6.17(18)	IMO guidance reference change due to superseded guidance document	
5 th	6.17(21)	Editorial Change	Paragraph re-written to clarify the intent with the original scope of the SOLAS requirement. No change in actual requirement.
4 th	6.18	New Section	Inclusion of SOLAS requirements for Safety Centre
3 rd	7.4	Expansion of the rescue boat location	LY3 text added and consequential numbering amendments
4 th	7.6(1)(a), (b), (c) & (d)	Deleted	Original SOLAS text not applicable to the Code
4 th	7.6(12)	New subsection	Inclusion of an equivalence for electrical power on launching appliances
4 th	7.7(6)	New subsection	Clarification of the intent that each rescue boat must be served by its own appliance

4 th	7.9(2)(a) & (b)	'Transponders' replaced with 'search and rescue locating device'	IMO RESOLUTION MSC.256(84) incorporated
5 th	7.9(2)	'Transponders' replaced with 'search and rescue locating device'	Some references missed from 4 th Edition amendments
3 rd	7.10(1)	Editorial table correction	Gross tonnage of ship under 3000 GT, Minimum number of lifebuoys to be fitted with self-igniting lights corrected from 6 to 4.
4 th	7.10(12)	Deleted for added clarity	7.10(13) & (14) renumbered
3 rd	7.10(13)	Amended to clarify the requirements	
6 th	7.14(4)	New footnote added	Reference to MSC/Circ.699 added to footnotes
6 th	7.17(20)	Change in period from 3 to 4 months	Brought inline with SOLAS SOLAS III/19.4.3
3 rd	7.21	Editorial correction for vessel type. Additional text for liferafts carried with lifeboat	Ensuring that the carriage of lifeboats is no less safe than liferafts should the loss of a single survival craft occur.
4 th	7.21(1) & (2)	Additional text to reflect the change in the writing of the Code as a result of the new Annex 3	No change to the Code's application is made
4 th	Table 7-1	Table Deleted and subsequent references changed	Replaced with Annex 3
4 th	7.21(2)(d)	New paragraph	Clarification that DLLR are permitted as the sole means of abandonment
5 th	7.21(2)(d)	Editorial amendment	Removal of superfluous punctuation
5 th	7.21(4)	Amendments to reflect the implementation of the Polar Code. Alignment of the Code with SOLAS & Polar Code and removal of 'gold plating'	
4 th	7.26	Title edited	Deletion of exploratory text in brackets as SOLAS III/38 is no longer considered as a 'new amendment'
5 th	7.27	New Section Added	New requirements reflecting SOLAS amendments for the recovery of persons from the water
5 th	8.2	Provisions for following alternative design and arrangements added	
5 th	9	Chapter 9 deleted	The PYC Chapter 9 acted to bring the requirements of the MLC into force early for this type of vessel. However, as the PYC does not form an equivalence to the ILO's MLC 2006, to avoid any inconsistencies now that the MLC is in force, this chapter will now be removed and direct reference to the MLC included
3 rd	9.1.	Duplicate paragraph (9.1.4) numbers resolved	
3 rd	9.10(1)	Specific lighting lux removed	
4 th	9.12(9)	Removal of text regarding sidelights or windows	Amended to reflect the practice that passenger vessels do not require any sidelights or windows
4 th	9.12(23)	Inclusion of the the chief navigating officer	As per MLC text
6 th	11.1(5)	New reference to IMO circular on	

		passenger ship tenders	
5 th	11.3	IMO resolution reference changed	
5 th	11.4	New footnote added and reference to international standards	Reference to <i>MSC.1/Circular.1331 added</i>
4 th	12.5(5)	Editorial correction	Footnote reference changed
4 th	12.5(5) & (6)	Editorial correction	Incorrect footnote chapter changed
6 th	12.5(8)	Clarification of ETO & head of interior department	
4 th	Table 12-1 Note (c)	Text amended for clarity	
6 th	Chapter 14	New Chapter	Provisions for sailing vessels
5 th	Annex 2	Removed from Code	Annex 2 placed on REG Website
4 th	Annex 3	New Table	This incorporates tables P-1, 1-1, 4-1 & 7-1.
5 th	Annex 3 Footnote	Amendments to reflect the implementation of the Polar Code. Alignment of the Code with SOLAS & Polar Code and removal of 'gold plating'	Deletion of
5 th	Annex 3	Amendments to reflect the implementation of the Polar Code. Alignment of the Code with SOLAS & Polar Code and removal of 'gold plating'	Deletions of "(except for polar regions)"
5 th	Annex 3	New abbreviation for Pleasure Vessel Not Engaged in Trade added (PY-P)	
6 th	Annex 3	Footnote amended	Clarifying the DLLR & MES ratios
5 th	Annex 4	New Guidance Document Added	Materials Matrix for Fire Safety

Preamble

(The Preamble is provided for explanatory purposes and is not part of the Code provisions)

1. *It is widely recognised that it has become increasingly impractical to apply to pleasure yachts International Convention standards and requirements of the major operational Conventions of the International Maritime Organization (IMO), which have been developed and have evolved to deal with merchant cargo ships and passenger ships. With respect to non-passenger pleasure yachts, these difficulties have been addressed under the Large Commercial yacht Code (LY2) which deals with pleasure vessels engaged in trade carrying 12 passengers or less.*

2. *In a similar vein, this Code (The Code of Practice for Yachts Carrying 13 to 36 Passengers”) hereinafter referred to as “the Passenger yacht Code” or “the Code”, seeks to rationalise the requirements and standards to be met by a pleasure yacht of any size which carries more than 12 but not more than 36 passengers on international voyages, particularly with respect to the International Convention for the Safety of Life at Sea, 1974 (SOLAS 1974), as amended, the International Convention on Load Lines, 1966 (LL 1966), as amended and the International Convention on Standards of Training, Certification and Watchkeeping, 1978 (STCW 1978), as amended, including applicable Protocols and Codes thereto.*

3. *The development of the Code is therefore based on the consideration that full compliance with some of the provisions of the conventions referred to in paragraph 2 as they apply to commercial merchant passenger ships is unreasonable and in some instances disproportionately onerous in terms of design and cost compared to the incremental increase in safety levels achieved for yachts, given that pleasure yachts have a very different operating pattern (for the most part occasional voyages in defined weather conditions or operating areas) when compared to a typical commercial passenger ship which usually operates 24/7 on a tight schedule. Thus, for the avoidance of doubt, the Code is intended to cater exclusively to the pleasure and leisure sector of the market and it is not intended to apply to commercial cruise, excursion or ferry passenger (including passenger/cargo vessels) sectors of the industry. Vessels to which this Code applies need not be considered as High Speed Craft.*

4. *The Code has been developed by the Members of the Red Ensign Group¹ (REG) through its Technical Forum and applies to pleasure yachts of any size which are in private use or engaged in trade and which do not carry cargo and carry 13 to 36 passengers.*

5. *The Code sets out technical, safety and operational standards appropriate to the size and operation of the vessels expected to operate under this Code. The standards incorporated in the Code are largely based on the international conventions applying to commercial vessels with the inclusion of equivalencies where it is not reasonable or practicable to comply with the conventions and where there is an opportunity to enhance*

¹ The Members of the Red Ensign Group (REG) consist of the Maritime Administrations of the United Kingdom, Anguilla, Bermuda, British Virgin Islands, Cayman Islands, Falkland Islands, Gibraltar, Guernsey, Isle of Man, Jersey, Montserrat, Turks and Caicos, and St. Helena.

safety. Compliance with the standards required by the Code will entitle a yacht to be issued with the appropriate Passenger Certificate under the relevant international Convention or under national law as the case may be.

6. Table Annex 3 sets out the philosophy applied in terms of the category of pleasure yacht and its area of operation against the standards of stability and survivability, scale of Life Saving Appliances (LSA), maximum persons carried and related parameters. The structure also provides a “stepped approach” to be adopted in ascertaining appropriate standards to be applied to the various categories of yacht and their operational areas. In general terms, where the carriage of Davit Launched Liferafts (DLLs) or Marine Evacuation Systems (MESs) are permitted in lieu of lifeboats, enhanced standards of subdivision, damaged stability and fire protection are applied as per the relevant Chapters of the Code, bearing in mind the relationships between subdivision, damaged stability and survivability of the yacht, thus applying the current philosophy of the ship being its own best survival craft.

7. With respect to structural standards it is a pre-requisite that a vessel aspiring to be Code compliant will be Classed and maintained in Class as a passenger ship with one of the Classification Societies authorised to act as a Recognized Organization (RO) by the REG.

8. In regard to enhanced fire protection, detection and extinction, for example, a fully addressable fire detecting and extinguishing system is required in all ships to which the Code applies.

9. In parallel with the “stepped” approach referred to in paragraph 6 the Code also, with respect to a Passenger Yacht 2, takes account of the provisions in SOLAS (Chapter II-2A, Regulation .4.1 and Chapter IIIA, Regulation 1.4.1) which allow for exemptions from the requirements with respect to the sheltered nature and conditions voyages where the ship is not more than 20 nautical miles from land.

10. The option remains for any yacht to which the Code applies to carry lifeboats and thereby operate in a higher category or less restricted operational area.

11. Whilst the early versions of the Code did not include provisions for sailing vessels, with the publication of the sixth edition, there are now such provisions in the form of Chapter 14. This chapter was made possible by the kind sponsorship of a research project on intact sailing vessel stability by the Superyacht Builder Association (SYBAss), Lloyds Register EMEA & the International Council of Marine Industry Associations (ICOMIA) for which the REG are thankful. The REG requests that information on experience gained in the implementation of the Chapter is submitted to the industry working group to aid in its continued development.

12. The Code does not currently include provisions for composite vessels. Therefore, whilst it is intended to include such provisions in a later version of the Code, vessels constructed from composite or other materials are excluded from the current version.

13. Where reference is made to the National Requirements in an Annex, individual members of the REG can provide guidance appropriate to their national regulations and policy.

14. Where the relevant provisions of SOLAS 74 or LL 66 (as amended) apply in part but some provisions have been modified then the text of all of that Part of the Convention has been incorporated into the body text of the Code for consistency and ease of reference. To readily determine what is “new” drafting and what, in essence, are unmodified Convention provisions, then in the body text of the Code-

- (a) modified or alternative provisions are shown, in italics; and
- (b) unchanged Convention provisions are shown in plain text.

15. Again for consistency and to achieve a uniform drafting style, the wording of some of the unchanged Convention provisions has been adjusted, but the actual provisions remain unchanged and so the body text is in plain text.

16. Where the relevant provisions of a part of SOLAS 1974 or LL 1966 apply without any modification, those provisions are in general incorporated into the Code through appropriate cross references.

17. The structure of the Code in terms of Headings, Sections etc. is as follows-

- (a) the main divisions are Chapters;
- (b) in each Chapter consecutive “sections”, which each have a sub-heading attached to them, are numbered consecutively preceded by the Chapter number – e.g., in Chapter 1 the sections would be 1.1, 1.2, 1.3 etc.;
- (c) sections are further divided into subsections numbered consecutively as (1), (2), (3) etc. except where, occasionally, the section does not require any such division;
- (d) subsections may be further subdivided into paragraphs labelled (a), (b) (c) etc.;
- (e) where necessary, paragraphs may be further divided into subparagraphs numbered (i), (ii), (iii) etc.;
- (f) where occasionally a further sub-division is necessary, sub-subparagraphs are used labelled **(ba)**, **(bb)**, **(bc)** etc.
- (g) due to its complex structure, Chapter 4 has also been subdivided into Parts;
- (h) finally, for consistency and clarity, cross references are couched in terms of the Chapter and section number to the required level (e.g. section 4.49(1)(a) (ii) refers to Chapter 4, section 49, subsection (1), paragraph (a). subparagraph (ii), except where a shortened reference does not introduce any doubt.

18. It should also be borne in mind that the applicable provisions of other International Conventions and related Instruments, as well as the provisions of applicable national legislation, are to be applied as appropriate, except where equivalent or alternative provisions are provided for under the Code, in which case the Code provisions will apply. In this regard it is not permitted to apply only selected provisions of the Code on a “pick and mix” basis. Where the Code is applied, it shall, to that extent, be applied in full.

19. *In setting out the required standards of safety and operation, within the framework of SOLAS 1974, LL 66 and STCW 78, as amended, which are appropriate to the size and area of operation of the vessel, due cognizance is taken of the provisions in those Conventions for equivalent or alternative provisions taking into account the functional requirements involved².*

20. *Other International Conventions and Instruments which may need to be complied with include but are not necessarily limited to-*

- (i) International Convention on Tonnage Measurement of Ships, 1969, as amended (TONNAGE 1969);*
- (j) Protocols of 19883 relating to International Convention on Load Lines, 1966, as amended (LL PROT 1988) and the International Convention for the Safety of Life at Sea, 1974, as amended (SOLAS Protocol 1988);*
- (k) International Convention for the Prevention of Pollution from Ships, 1973, as amended by the Protocol relating thereto of 1978, as further amended (MARPOL 73/78);*
- (l) International Convention on Standards of Training, Certification and Watchkeeping for Seafarers, 1978, as amended (STCW 1978);*
- (m) Convention on the International Regulations for the Prevention of Collisions at Sea, 1972, as amended (COLREG 1972);*
- (n) Maritime Labour Convention, 2006;*
- (o) International Convention on the control of Harmful Anti-fouling Systems on Ships, 2001;*
- (p) Ballast Water Management Convention, 2004;*
- (q) International Convention on Civil Liability for Bunker Oil Pollution Damage, 2001;*
- (r) Protocol of 1997 to MARPOL (Annex VI – Air Pollution); and*
- (s) International Convention on the Control of Harmful Anti-Fouling Systems on Ships.*
- (t) Yachts which intend to operate in Polar Regions must meet requirements of one of the recognized Classification Societies listed in Annex 1 appropriate to the intended area of operation. Reference to be made to SOLAS XIV and the Polar Code.*

² In this regard, account should be taken of the early application (for ships constructed on or after 05 December 2008) of the International Code on Intact Stability, 2008 which was adopted under IMO resolution MSC.267(85), as referenced by MSC.1/Circ.1292 dated 09 December 2008³ as well as the entry into force of the amendments to SOLAS 74 (as amended) as adopted by IMO Resolution MSC.269(85).

³ Introduces the Harmonized System of Survey and Certification (HSSC).

CHAPTER 1

GENERAL

1.1 Purpose:

The purpose of the 13-36 Passenger Yacht Code (PYC), hereinafter referred to as the Code, is to provide design criteria, construction standards and other safety measures for yachts carrying 13 to 36 passengers so as to minimise the risk to such ships, to the personnel on board and to the environment. The criteria are largely based on the Conventions and Instruments referred to in the preamble to this Code, but have been modified where deemed appropriate.

1.2 Application:

- (1) *This Code applies only to Red Ensign Group pleasure yachts engaged on international voyages whilst carrying more than 12 but not more than 36 passengers with a maximum number of persons not more than 120 and which do not carry cargo.*
- (2) *This Code applies to ships, designed constructed surveyed and certified in accordance with the requirements of this Code. Existing vessels may apply for certification in accordance with the Code; however the Code will apply to such vessels in the same way as it applies to new vessels.*
- (3) *Subject to subsection (4), all ships which undergo repairs, alterations, modifications and outfitting related thereto shall continue to comply with at least the requirements previously applicable to these ships.*
- (4) *Any ship, whenever built, which is converted to a passenger yacht, or undergoes repairs, alterations and modifications which substantially alter the dimensions of the ship or the passenger accommodation spaces, or substantially increase the ship's service life, shall be treated as a passenger yacht constructed on the date on which such conversion, repairs, alterations or modifications commenced.*
- (5) *The table in Annex 3 sets out the general relationships between the type of pleasure yacht, its area of operation and the applicable standards with respect to Life Saving Appliances (LSA) and stability.*
- (6) *Although the Code applies to yachts carrying up to 120 persons, where more than 99 persons are carried, the yacht must:*
 - (a) *be fitted with approved lifeboats, davits and launching arrangements in accordance with SOLAS 74 (as amended);*
 - (b) *carry a qualified doctor; and*
 - (c) *not exceed 36 passengers carried.*

1.3 Definitions:

- (1) For the purpose of this Code, unless expressly provided otherwise, the terms used therein have the meanings defined in this section- (Note: where a definition is not contained within this Code, guidance should be taken from definitions within the applicable International conventions)-

“*A*” *Class divisions*” means those divisions formed by bulkheads and decks which comply with the following criteria-

- (a) they are constructed of steel or other equivalent material;
- (b) they are suitably stiffened;
- (c) they are insulated with approved non-combustible materials such that the average temperature of the unexposed side will not rise more than 140°C above the original temperature, nor will the temperature, at any one point, including any joint, rise more than 180°C above the original temperature, within the time listed below;

class "A-60" 60 min

class "A-30" 30 min

class "A-15" 15 min

class "A-0" 0 min

- (d) they are constructed as to be capable of preventing the passage of smoke and flame to the end of the one-hour standard fire test; and
- (e) the Administration has required a test of a prototype bulkhead or deck in accordance with the Fire Test Procedures Code to ensure that it meets the above requirements for integrity and temperature rise;

“*accommodation spaces*” means those spaces used for public spaces, corridors, lavatories, cabins, offices, hospitals, cinemas, game and hobby rooms, barber shops, pantries containing no cooking appliances and similar spaces.

“*aft terminal*” means the aft limit of the subdivision length;

“*aft perpendicular*” means the perpendicular taken at the after end of length (L);

“*amidship*” means at the middle of the length (L);

“*anti-exposure suit*” means a protective suit designed for use by rescue boat crews and marine evacuation system parties;

“*atrium*” means a public spaces within a single main vertical zone spanning three or more open decks;

“*B*” *class divisions*” means those divisions, referred to as “B-15” or “B-0”, formed by bulkheads, decks, ceilings or linings which comply with the following criteria-

- (a) they are constructed of approved non-combustible materials and all materials used in the construction and erection of "B" class divisions are non-combustible, with the exception that combustible veneers may be

permitted provided they meet other appropriate requirements of this Chapter;

- (b) they have an insulation value such that the average temperature of the unexposed side will not rise more than 140°C above the original temperature, nor will the temperature at any one point, including any joint, rise more than 225°C above the original temperature, within the time listed below-

TYPE OF "B CLASS" DIVISION	MINIMUM TIME FOR WHICH UNEXPOSED SIDE HAS TO REMAIN BELOW SPECIFIED LIMITS
class "B-15"	15 minutes
class "B-0"	0 minutes

- (c) they are so constructed as to be capable of preventing the passage of flame to the end of the first half hour of the standard fire test; and
- (d) the Administration has required a test of a prototype division in accordance with the Fire Test Procedures Code to ensure that it meets the above requirements for integrity and temperature rise;

“*breadth*” or “*B*” means the maximum breadth of the ship, measured amidships to the moulded line of the frame in a ship with a metal shell and to the outer surface of the hull in a ship with a shell of any other material, unless expressly provided otherwise;

“*bulkhead deck*” means the uppermost deck up to which the transverse watertight bulkheads are carried;

“*Bunkers Convention*” means the International Convention on Civil Liability for Bunker Oil Pollution Damage, 2001, as may be amended from time to time;

“*cabin balcony*” means an open deck space which is provided for the exclusive use of the occupants of a single cabin and has direct access from such a cabin;

“*C class division*” means a division constructed of approved non-combustible materials which may not meet either requirements relative to the passage of smoke and flame nor limitations relative to the temperature rise and includes combustible veneers are provided they meet the requirements of this Chapter;

“*cargo ship*” means, for the purposes of this Code, any ship which is not a passenger ship or a pleasure yacht;

“*central control station*” means a control station in which the following control and indicator functions are centralised-

- (a) fixed fire detection and fire alarm systems;
- (b) automatic sprinkler, fire detection and fire alarm systems;
- (c) fire door indicator panels;
- (d) fire door closure;
- (e) watertight door indicator panels;
- (f) watertight door closures;
- (g) ventilation fans;

- (h) general/fire alarms;
- (i) communication systems including telephones; and
- (j) microphones to public address systems;

“*certificated person*” means a person who holds a certificate of proficiency in survival craft issued under the authority of, or recognised as valid by, the Administration in accordance with the requirements of the International Convention on Standards of Training, Certification and Watchkeeping for Seafarers, in force; or a person who holds a certificate issued or recognised by the Administration of a State not a Party to that Convention for the same purpose as the convention certificate;

“*Code*” means *Code of Practice for Pleasure Yachts Carrying 13 to 36 Passengers (i.e. this Code)*;

“*combustible material*” means any material other than a non-combustible material;

“*continuous "B" class ceilings or linings*” means those "B" class ceilings or linings which terminate at an "A" or "B" class division;

“*continuously manned central control station*” means a central control station which is continuously manned by a responsible member of the crew;

“*control stations*” means those spaces in which the ship's radio or main navigating equipment or the emergency source of power is located or where the fire recording or fire control equipment is centralised; spaces where the fire recording or fire control equipment is centralised are also considered to be a fire control station;

“*deepest subdivision draft*” or “*(ds)*” means the waterline which corresponds to the summer load line draft of the ship;

“*design pressure*” means the hydrostatic pressure for which each structure or appliance assumed watertight in the intact and damage stability calculations is designed to withstand;

“*detection*” means the determination of the location of survivors or survival craft;

“*draft*” or “*(d)*” means the vertical distance from the keel line at mid-length to the waterline in question;

“*embarkation ladder*” means the ladder provided at survival craft embarkation stations to permit safe access to survival craft after launching;

“*emergency source of electrical power*” means the emergency source of electrical power required by SOLAS, Chapter II-1; regulation 42;

“*engaged in trade*” means, for the purposes of the Code, the carriage by a yacht of more than 12 but not more than 36 passengers for reward or remuneration under a charter or hire agreement;

“*Fire damper*” means a device installed in a ventilation duct, which under normal conditions remains open allowing flow in the duct, and is closed during a fire, preventing the flow in the duct to restrict the passage of fire. In using the above definition the following terms may be associated:

- (a) “*automatic fire damper*” is a fire damper that closes independently in response to exposure to fire products;

- (b) “*manual fire damper*” is a fire damper that is intended to be opened or closed by the crew by hand at the damper itself; and
- (c) “*remotely operated fire damper*” is a fire damper that is closed by the crew through a control located at a distance away from the controlled damper.

“*Fire Safety Systems Code*” means the International Code for Fire Safety Systems as adopted by the Maritime Safety Committee of the IMO by resolution MSC.98 (73), as may be amended by the IMO, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the Annex to the Convention other than Chapter I thereof;

“*Fire Test Procedures Code*” means the International Code for Application of Fire Test Procedures as adopted by the Maritime Safety Committee of the IMO by resolution MSC.61(67), as may be amended by the IMO, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of article VIII of the present Convention concerning the amendment procedures applicable to the Annex to the Convention other than Chapter I thereof;

“*flashpoint*” means the temperature in degrees Celsius (closed cup test) at which a product will give off enough flammable vapour to be ignited, as determined by an approved flashpoint apparatus;

“*float-free launching*” means that method of launching a survival craft whereby the craft is automatically released from a sinking ship and is ready for use;

“*forward perpendicular*” means the perpendicular taken at the forward end of the length (L) such that the perpendicular coincides with the fore side of the stem on the waterline on which the length is measured;

“*forward terminal*” means the forward limit of the subdivision length;

“*freeboard*” in relation to a freeboard assigned to a ship means the distance measured vertically downwards amidships from the upper edge of the deck line to the upper edge of the related load line;

“*freeboard deck*” means, subject to paragraphs (a) to (d) below, the uppermost complete deck exposed to weather and sea, which has permanent means of closing all openings in the weather part thereof, and below which all openings in the sides of the ship are fitted with permanent means of watertight closing-

- (a) in a ship having a discontinuous freeboard deck, the lowest line of the exposed deck and the continuation of that line parallel to the upper part of the deck is taken as the freeboard deck; and
- (b) at the option of the owner and subject to the approval of the Administration, a lower deck may be designated as the freeboard deck provided it is a complete and permanent deck continuous in a fore and aft direction at least between the machinery space and peak bulkheads and continuous athwartships, provided that-
- (c) when this lower deck is stepped the lowest line of the deck and the continuation of that line parallel to the upper part of the deck is taken as the freeboard deck;

- (d) when a lower deck is designated as the freeboard deck, that part of the hull which extends above the freeboard deck is treated as a superstructure so far as concerns the application of the conditions of assignment and the calculation of freeboard and it is from this deck that the freeboard is calculated.

“garage spaces” means those enclosed spaces above and below the bulkhead deck used for the storage of pleasure craft, vehicles, jet skis or any other such engine driven units;

“general emergency alarm system” means the general emergency alarm system complying with the requirements of Chapter VII, 7.2.1 the LSA Code;

“Hazardous area” means those areas which may contain flammable or explosive gases, dusts or vapours, the use without proper consideration of machinery or electrical equipment may lead to fire hazard or explosion.

“helicopter facility” means a helideck including any refuelling and hangar facilities;

“helideck” means a purpose-built helicopter landing area located on a ship including all structure, fire-fighting appliances and other equipment necessary for the safe operation of helicopters;

“IGF Code” means the International Code of safety for ships using gases or other low-flashpoint fuels as adopted by the Maritime Safety Committee of the IMO by resolution MSC.391(95), as may be amended

“ILO” means the International Labour Organisation;

“immersion suit” means a protective suit which reduces the body heat loss of a person wearing it in cold water;

“IMO” means the International Maritime Organization;

“inflatable appliance” means an appliance which depends upon non-rigid, gas-filled chambers for buoyancy and which is normally kept uninflated until ready for use;

“inflated appliance” means an appliance which depends upon non-rigid, gas-filled chambers for buoyancy and which is kept inflated and ready for use at all times;

“Intact Stability Code, 2008” means the International Code on Intact Stability, 2008 (2008 IS Code)⁴;

“keel line” means a line parallel to the slope of the keel passing amidships through-

- (a) the top of the keel at centreline or line of intersection of the inside of shell plating with the keel if a bar keel extends below that line, on a ship with a metal shell; or
- (b) in wood and composite ships, the distance is measured from the lower edge of the keel rabbet and when the form at the lower part of the midship section is of a hollow character, or where thick garboards are fitted, the distance is measured from the point where the line of the flat of the bottom continued inward intersects the centreline amidships;

⁴ As adopted by IMO Circular MSC.267(85). This revised Code includes a mandatory Part A and a recommendatory Part B. Also included in Part A are Severe Wind and Weather Rolling Criteria.

“*launching appliance or arrangement*” means an arrangement for transferring a survival craft or rescue boat from its stowed position safely to the water;

“*Length*” or “*(L)*” in relation to a ship means 96% of the total length on a waterline at 85% of the least moulded depth measured from the top of the keel, or the length from the fore-side of the stem to the axis of the rudder stock on that waterline, if that be greater. In ships designed with a rake of keel the waterline on which this is measured shall be parallel to the designed waterline;

“*light service draft*” or “*(dl)*” means the service draft corresponding to the lightest anticipated loading and associated tankage, including such ballast as may be necessary for stability and/or propeller immersion and the full complement of passengers and crew on board;

“*lightest seagoing condition*” means the loading condition with the ship on even keel, with 10% stores and fuel remaining and with the full number of passengers and crew and their luggage;

“*lightweight*” means the displacement of a ship in tonnes without, fuel, lubricating oil, ballast water, fresh water and feedwater in tanks, consumable stores, and passengers and crew and their effects;

“*Load Line Convention*” means the International Convention on Load Lines, 1966, as amended by the Protocol of 1988 relating thereto and as otherwise be amended by the IMO;

“*low flame-spread*” means that the surface thus described will adequately restrict the spread of flame, this being determined in accordance with the Fire Test Procedures Code;

“*Low-flashpoint fuel*” means gaseous or liquid fuel having a flashpoint lower than otherwise permitted under SOLAS regulation II-2/4.2.1.1.

“*LSA Code*” means the International Life-Saving Appliance (LSA) Code adopted by the Maritime Safety Committee of the IMO by resolution MSC.48(66), as it may be amended by the IMO;

“*machinery rooms*” means spaces between the watertight boundaries of a room containing the main and auxiliary propulsion machinery, including boilers, generators and electric motors primarily intended for propulsion; provided that in the case of unusual arrangements, the Administration may define the limits of the machinery rooms;

“*machinery spaces of category A*” means those spaces and trunks to such spaces which contain either-

- (a) internal combustion machinery used for main propulsion;
- (b) internal combustion machinery used for purposes other than main propulsion where such machinery has in the aggregate a total power output of not less than 375 kW; or
- (c) any oil-fired boiler or oil fuel unit, or any oil-fired equipment other than boilers, such as inert gas generators, incinerators, etc.;

“*machinery spaces*” means machinery spaces of category A and other spaces containing propulsion machinery, boilers, oil fuel units, steam and internal combustion engines, generators and major electrical machinery, oil filling stations,

refrigerating, stabilising, ventilation and air conditioning machinery, and similar spaces, and trunks to such spaces;

“*main vertical zones*” means those sections into which the hull, superstructure and deckhouses are divided by "A" class divisions, the mean length and width of which, on any deck, does not in general exceed 40 metres;

“*margin line*” is a line drawn at least 76 mm below the upper surface of the bulkhead deck at side

“*marine evacuation system*” means an appliance for the rapid transfer of persons from the embarkation deck of a ship to a floating survival craft;

“*master*” includes every person (except a pilot) having command or charge of a ship and, in relation to a passenger yacht, include the captain or skipper;

“*mid-length*” means the mid-point of the subdivision length of the ship;

“*MLC*” means the ILO Maritime Labour Convention, 2006;

“*moulded depth*” means, subject to paragraphs (a) to (c) below, the vertical distance measured from the top of the keel to the top of the freeboard deck beam at side, provided that-

- (a) in wood and composite ships the distance is measured from the lower edge of the keel rabbet and where the form at the lower part of the midship section is of a hollow character, or where thick garboards are fitted, the distance is measured from the point where the line of the flat of the bottom continued inwards cuts the side of the keel;
- (b) in ships having rounded gunwales, the moulded depth shall be measured to the point of intersection of the moulded lines of the deck and side shell plating, the lines extending as though the gunwale were of angular design; and
- (c) where the freeboard deck is stepped and the raised part of the deck extends over the point at which the moulded depth is to be determined, the moulded depth shall be measured to a line of reference extending from the lower part of the deck along a line parallel with the raised part;

“*non-combustible material*” means a material which neither burns nor gives off flammable vapours in sufficient quantity for self-ignition when heated to approximately 750°C, this being determined in accordance with the Fire Test Procedures Code;

“*novel life-saving appliance or arrangement*” means a life-saving appliance or arrangement which embodies new features not fully covered by the provisions of this Chapter or the Code but which provides an equal or higher standard of safety;

“*oil fuel unit*” means the equipment used for the preparation of oil fuel for delivery to an oil-fired boiler, or equipment used for the preparation for delivery of heated oil to an internal combustion engine, and includes any oil pressure pumps, filters and heaters dealing with oil at a pressure of more than 0.18 N/mm²;

“*partial subdivision draft*” or “*(dp)*” means the light service draft plus 60% of the difference between the light service draft and the deepest subdivision draft;

“*passenger*” means a person carried on a ship except-

- (a) *a person employed or engaged in any capacity on the business of the ship;*
- (b) *a person on board the ship either in pursuance of the obligation laid upon the master to carry shipwrecked, distressed or other persons, or by reason of any circumstance that neither the master, owner nor charterer, if any, could have prevented or forestalled; or*
- (c) *a child under one year of age;*

“passenger pleasure yacht” means a pleasure vessel carrying more than 12 but not more than 36 passengers;

“passenger spaces” means those spaces which are provided for the accommodation and use of passengers, excluding baggage store, provision and mail rooms and for the purposes of purposes of sections 4.26(3) and 4.27(5), spaces provided below the margin line for the accommodation and use of the crew shall be regarded as passenger spaces;

“passenger yacht” means a yacht engaged in trade carrying more than 12 but not more than 36 passengers;

“Passenger Yacht 1” means a passenger yacht engaged on a prescribed international voyage;

“Passenger Yacht 2” means a passenger yacht engaged on voyages in wind and weather conditions not exceeding Wind Scale 6 and Sea State 5 on the Beaufort scale and during which the ship is-

- (a) *not more than 20 nautical miles from land; and*
- (b) *not more than 60 nautical miles from a port or place in which the passengers and crew could be placed in safety;*

“permeability” or “(μ)” of a space means the proportion of the immersed volume of that space which can be occupied by water;

“pleasure vessel” shall have the meaning assigned to the term as defined in the national legislation of the REG Member State implementing the provisions of the Code;

“pleasure yacht” includes a yacht not engaged in trade and a yacht engaged in trade;

“positive stability” means the ability of a ship to return to its original position after the removal of a heeling moment;

“prescribed international voyage” means an international voyage during the course of which a ship is not more than 200 nautical miles from a port or place in which the passengers and crew could be placed in safety and within a geographical area which limits the length of the voyage to a maximum of 1000 nautical miles from the initial point of departure, as specified in any Certificate issued in accordance with the Code with respect to the ship;

“prescriptive requirements” means the construction characteristics, limiting dimensions or fire safety systems specified in this Code or in applicable international Conventions or national laws and regulations;

“public spaces” means those portions of the accommodation which are used for halls, dining rooms, lounges and includes similar permanently enclosed spaces;

“*Recognised Organization*” or “*RO*” means a Classification Society or other body which has been authorised by the Administration under a written agreement to undertake statutory surveys and issue statutory Certificates on the Administration’s behalf;

“*recovery time for a rescue boat*” means the time required to raise the boat to a position where persons on board can disembark to the deck of the ship and includes the time required to make preparations for recovery on board the rescue boat such as passing and securing a painter, connecting the rescue boat to the launching appliance, and the time to raise the rescue boat provided that recovery time does not include the time needed to lower the launching appliance into position to recover the rescue boat;

“*rescue boat*” means a boat designed to rescue persons in distress and to marshal survival craft;

“*retrieval of survivors*” means the safe recovery of survivors;

“*Sailing vessel*” means a vessel designed to carry sail, whether as a sole means of propulsion or as a supplementary means.

“*sauna*” means a hot room with temperatures normally varying between 80°C and 120°C where the heat is provided by a hot surface (e.g., by an electrically heated oven) and may include the space where the oven is located and adjacent bathrooms;

“*seafarer*” includes every person (except masters and pilots) employed or engaged in any capacity on board a ship;

“*service spaces*” means those spaces used for galleys, pantries containing cooking appliances, lockers, store-rooms, workshops other than those forming part of the machinery spaces, and similar spaces and trunks to such spaces;

“*ships constructed*” means ships the keels of which are laid or which are at a similar stage of construction;

“*similar stage of construction*” means the stage at which-

- (a) construction identifiable with a specific ship begins; and
- (b) assembly of that ship has commenced comprising at least 50 tonnes or 1% of the estimated mass of all structural material, whichever is less;

“*SOLAS*” means the International Convention for the safety of Life at Sea, 1974 as amended by *the IMO*;

“*Smoke damper*” means a device installed in a ventilation duct, which under normal conditions remains open allowing flow in the duct, and is closed during a fire, preventing the flow in the duct to restrict the passage of smoke and hot gases. A smoke damper is not expected to contribute to the integrity of a fire rated division penetrated by a ventilation duct. In using the above definition the following terms may be associated:

- (a) “*automatic smoke damper*” is a smoke damper that closes independently in response to exposure to smoke or hot gases;
- (b) “*manual smoke damper*” is a smoke damper intended to be opened or closed by the crew by hand at the damper itself; and

- (c) “*remotely operated smoke damper*” is a smoke damper that is closed by the crew through a control located at a distance away from the controlled damper.

“*STCW Convention*” means the *International Convention on Standards of Training, Certification and Watchkeeping for Seafarers, 1978, as amended by the IMO*;

“*standard fire test*” means a test in which specimens of the relevant bulkheads or decks are exposed in a test furnace to temperatures corresponding approximately to the standard time-temperature curve in accordance with the test method specified in the Fire Test Procedures Code;

“*steel or other equivalent material*” means any non-combustible material which, by itself or due to insulation provided, has structural and integrity properties equivalent to steel at the end of the applicable exposure to the standard fire test (e.g., aluminium alloy with appropriate insulation);

“*sub-division length*” or “*(L_s)*” of a ship means the greatest projected moulded length of that part of the ship at or below deck or decks limiting the vertical extent of flooding with the ship at the deepest subdivision draft;

“*superstructure*” means a decked structure on the freeboard deck, extending from side to side of the ship or with the side plating not being inboard of the shell plating more than 4% of the breadth (B);

“*survival craft*” means a craft capable of sustaining the lives of persons in distress from the time of abandoning the ship;

“*trim*” means the difference between the draft forward and the draft aft, where the drafts are measured at the forward and aft terminals respectively, disregarding any rake of keel;

“*vehicle space*” means a space intended for carriage of motor vehicles with fuel in their tanks for their own propulsion.

“*watertight*” means having scantlings and arrangements capable of preventing the passage of water in any direction under the head of water likely to occur in intact and damaged conditions and in the damaged condition the head of water is to be considered in the worst situation at equilibrium, including intermediate stages of flooding;

“*weather deck*” means a deck which is completely exposed to the weather from above and from at least two sides;

“*weathertight*” means capable of withstanding the penetration of water into a space in the ship situated above the water line in any sea conditions in which the vessel is permitted to operate;

“*well*” means any area on the deck exposed to the weather, where water may be entrapped and includes deck areas bounded on two or more sides by deck structures; and

“*yacht*” means a vessel which is designed, modified or adapted for the pursuit of sea-borne leisure activities by those on board either under the direct control of the person or persons on board or under the control of a crew provided for the purpose and includes a pleasure vessel and a pleasure yacht and may include commercial passenger ships carrying not more than 36 passengers on international voyages of a

limited extent, on point to point trade or otherwise, at the discretion of the Administration providing such vessels meet all the relevant provisions of the Code;

- (2) Except where the context otherwise requires, throughout the Code the terms “yacht”, “ship” and “vessel” are synonymous.
- (3) Statements that are expressed in the conditional “should” are to mean “shall” in the context of the code.

1.4 Survey and Certification:

- (1) All ships covered by this Code are required to be surveyed and certified in accordance with the applicable requirements of the survey guidelines under the IMO Harmonized System of Survey and Certification adopted by resolution A.1053(27). as applicable to a passenger ship carrying not more than 36 passengers.
- (2) Statutory work may be undertaken by surveyors of the Administration or by surveyors of a Classification Society appointed by the Administration. Radio surveys may be undertaken by an appropriate certifying authority appointed by the Administration. All requests for survey and certification must be made to the Administration or the appropriate Classification Society where such surveys are delegated.
- (3) On satisfactory completion of initial surveys and audits in accordance with this Code the ship will be issued with the applicable Certificates and Documents listed below-

CERTIFICATE/DOCUMENT
<i>International Load Line Certificate</i>
<i>International Tonnage Certificate</i>
<i>Certificate of Survey</i>
<i>Passenger Ship Safety Certificate (Passenger Yacht Safety Certificate)</i>
<i>Partial Declaration (Hull & Machinery)</i>
<i>Partial Declaration (excluding Hull & Machinery)</i>
<i>Partial Declaration (Radio-GMDSS)</i>
<i>Statement of Operational Limitations</i>
<i>International Oil Pollution Prevention Certificate</i>
<i>International Air pollution Prevention Certificate</i>
<i>International Sewage Pollution Prevention Certificate</i>
<i>International Anti-Fouling Systems Certificate</i>
<i>Maritime Labour Convention Certificate</i>
<i>Stability Booklet</i>
<i>Noise Test Report</i>
<i>Safety Management Certificate</i>
<i>International Ship Security Certificate</i>
<i>Safe Manning Document</i>
<i>Bunkers Convention Certificate of Insurance</i>

1.5 Casualties:

The Administration has a duty to conduct an investigation into any casualty occurring to any ships certified in accordance with this Code. Such an investigation may assist in determining what changes in the content of the code may be desirable. Casualty investigations should be carried out in accordance with the IMO Casualty Investigation Code⁵ and any applicable national legislation of the REG Member concerned.

1.6 Review of the Code:

The content of the Code will be reviewed as necessary by the REG from time to time to ascertain if amendments to it are required.

1.7 Amendments to international Conventions and related Instruments:

Where amendments to any international Convention or related Instrument covered by the Code enter into force in accordance with the established procedures of IMO and such amendments are applicable with respect to any REG Member, then such amendments shall be deemed to be in force for that Member with respect to the application of the Code.

1.8 International Conventions and related instruments

Where this Code makes references to International Conventions and related instruments, where the requirements are separated into vessel types, the parts that are applicable to passenger vessels should always be applied in relation to the Code.

1.9 Editions of the Code:

- (1) *Vessels the keels of which were laid or were at a similar stage of construction before the 1st January 2017, currently under survey to earlier Editions of the Code, may continue to be considered under the standards in force at the time of the initial survey, with the exception of:*
 - (a) *the following items which must comply with this Edition of the code:*
 - (i) **CHAPTER 1- GENERAL**
 - (ii) **CHAPTER 3 - APPLICATION OF OTHER INTERNATIONAL CONVENTIONS AND NATIONAL LEGISLATION**
 - (iii) **CHAPTER 8- RADIOCOMMUNICATIONS, SAFETY OF NAVIGATION, INTERNATIONAL SAFETY MANAGEMENT AND MARITIME SECURITY**
 - (iv) **CHAPTER 10- HEALTH AND SAFETY**
 - (v) **CHAPTER 12- MANNING, CERTIFICATION AND HOURS OF WORK**

⁵ The full title of the Casualty Investigation Code is “Code of International Standards and Recommended Practices for a Safety Investigation into a Marine Casualty or Incident”.

- (b) *Where the contents of the code includes a provision application date that would include such vessels.*
- (2) *Vessels the keels of which were laid or were at a similar stage of construction on or after the 1st January 2017, shall comply with this edition of the code in its entirety.*

CHAPTER 2

LOAD LINES

2.1 *Strength and Construction of Ship:*

- (1) The Administration shall satisfy itself that the general structural strength of the ship is adequate for the draft corresponding to the freeboard assigned.
- (2) In addition to the requirements contained elsewhere in this Code, a ship to which the Code applies shall be designed, constructed, maintained and assigned a Class Notation as a passenger ship in compliance with the structural, mechanical and electrical requirements of a classification society which is recognised by the Administration.
- (3) Ships to which this Code applies shall comply with an intact stability standard acceptable to the Administration.
- (4) All vessels shall be assigned a freeboard in accordance with the requirements of the Load Line Convention.
- (5) *A weather deck shall be fitted throughout the length of the vessel and be of adequate strength to withstand the sea and weather conditions likely to be encountered.*

2.2 *Application:*

- (1) Subject to meeting the requirements of section 2.16 (Protection of the Crew), relaxations from these requirements may be granted to a ship to which a greater than minimum freeboard is assigned on condition that the Administration is satisfied with the safety conditions provided.
- (2) Where the assigned summer freeboard is increased such that the resulting draft is not more than that corresponding to a minimum summer freeboard for the same ship, but with an assumed freeboard deck located a distance below the actual freeboard deck at least equal to the standard superstructure height, the conditions of assignment in accordance with the Load Line Convention, as applicable, to the actual freeboard deck may be as required for a superstructure deck.
- (3) *For the purposes of this section a standard superstructure height shall be taken as-*
 - (a) *1.8 metres for vessels up to 75 metres in length;*
 - (b) *2.3 metres for vessels of 125 metres or more in length; and*
 - (c) *superstructure heights for vessels of intermediate lengths should be obtained by interpolation.*

2.3 Subdivision and Load Line Mark:

- (1) *The line which indicates the subdivision and load line assigned in accordance with Chapter 4 and this Chapter shall be the horizontal line which passes through the centre of the ring shown in figure 2.1. (See also section 4.20 of Chapter 4 of the Code)*

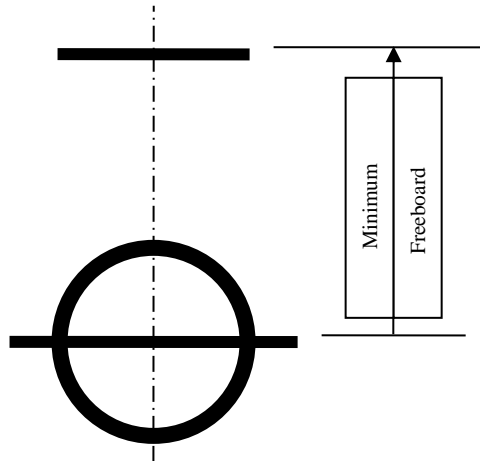


Figure 2.1

*(Illustration of minimum freeboard mark and not the actual markings required)
Note: Distance measured from the top edge of the deck line to the top edge of the line bisecting the ring.*

- (2) The Subdivision and load line mark shall consist of a ring 300 millimetres in outside diameter and 25 millimetres wide which is intersected by a horizontal line 450 millimetres in length and 25 millimetres in breadth, the upper edge of which passes through the centre of the ring; the centre of the ring shall be placed amidships and at a distance measured vertically below the upper edge of the deck line equal to the assigned freeboard measured vertically below the upper edge of the deck as illustrated in Figure 2.1.
- (3) *Subject to subsections (4) and (5), the deck line is a horizontal line 300 millimetres in length and 25 millimetres in breadth which shall be marked amidships on each side of the ship with its upper edge normally passing through the point where the continuation outwards of the upper surface of the freeboard deck intersects the outer surface of the shell, provided that the deck line may be placed with reference to another fixed point on the ship on condition that the freeboard is correspondingly corrected;*
- (4) *Where the upper edge of the deck line coincides with a readily identifiable structural feature such as the actual deck at the side amidships, that structural feature may be utilised as the deck line providing it is clearly identified as such in the Load Line Certificate;*
- (5) *Any other readily identifiable line or structure at the side amidships above or below the deck line position may be similarly utilised as the deck line providing it is*

clearly identified as such in the Load Line Certificate and the freeboard is correspondingly corrected.

- (6) The location of the reference point and the identification of the freeboard deck shall in all cases be indicated on the International Load Line Certificate.
- (7) In no case shall any subdivision load line mark be placed above the deepest load line in salt water as determined by the strength of the ship or this Chapter.
- (8) *The ring, lines and letters shall-*
 - (a) *be painted or otherwise permanently affixed to the hull;*
 - (b) *be of a contrasting colour to the hull; and*
 - (c) *where the marks are bonded to the hull provision shall be made to replace the marks, in the event of bond line failure, with the vessel afloat.*
- (9) The subdivision and load line assigned and marked shall be recorded in the Passenger Yacht Safety Certificate.
- (10) A ship shall in no case be so loaded that when it is in salt water the subdivision and load line mark is submerged.
- (11) *In applying this section due regard shall also be had to the requirement for draft marks as set out in section 4.29(17).*

2.4 Mark of Assigning Authority:

- (1) The mark of the Authority by whom the load lines are assigned may be indicated alongside the load line ring above the horizontal line which passes through the centre of the ring, or above and below it and the mark shall consist of not more than four initials to identify the Authority's name, each measuring approximately 115 millimetres in height and 75 millimetres in width.
- (2) The International Load Line Certificate shall not be delivered to the ship until the officer or surveyor acting under the provisions of Article 13 of the Load Line Convention has certified that the marks are correctly and permanently indicated on the ship's sides.

2.5 Doors and Openings above the Weather Deck:

- (1) All access openings in bulkheads at ends of enclosed superstructures shall be fitted with weathertight doors of steel or other equivalent material, permanently and strongly attached to the bulkhead, and framed, stiffened and fitted so that the whole structure is of equivalent strength to the un-pierced bulkhead; the means for securing these doors weathertight shall consist of gaskets and clamping devices or other equivalent means which shall be permanently attached to the bulkhead or to the doors themselves, and the doors shall be so arranged that they can be operated from both sides of the bulkhead.
- (2) Unless otherwise permitted by the Administration, doors shall be hinged at the forward edge and open outwards to provide additional security against the impact of the sea; *alternative closing arrangements will be considered providing it can be demonstrated that the efficiency of the closing arrangements and their ability to prevent the ingress of water will not impair the safety of the vessel.*
- (3) Except as otherwise provided in this Chapter, the height of sills of access openings in bulkheads at ends of enclosed superstructures shall be at least 380 millimetres above the deck.
- (4) Portable sills shall generally be avoided provided that where the fitting of a sill in accordance with subsection (3) proves impracticable, portable sills may be fitted on the following conditions-
 - (a) they shall be installed before the ship leaves port; and
 - (b) they shall be gasketed and fastened by closely spaced through bolts or other equivalent arrangement.
- (5) Where the requirements of section 2.2(2) are applicable further reductions in sill heights may be permitted provided that the Administration is satisfied that the safety of the ship is not impaired in any sea conditions and the safety of the ship will be assumed not to be impaired if the vessel can comply with the enhanced survivability standard as defined in section 4.30 with the space to which the door leads flooded.
- (6) For the purpose of this section, two positions of hatchways, doorways and ventilators are defined as follows-
 - (a) Position 1:**
 - (i) upon exposed freeboard and raised quarterdecks, and upon exposed superstructure decks situated forward of a point located a quarter of the ship's length from the forward perpendicular; and
 - (b) Position 2:**
 - (i) upon exposed superstructure decks situated abaft a quarter of the ship's length from the forward perpendicular and located at least one standard height of superstructure above the freeboard deck; or
 - (ii) upon exposed superstructure decks situated forward of a point located a quarter of the ship's length from the forward

perpendicular and located at least two standard heights of superstructure above the freeboard deck.

- (7) Machinery space openings in Position 1 or 2 shall be properly framed and efficiently enclosed by steel or equivalent casings of ample strength and where machinery casings are not protected by other structures, their strength and protection arrangements shall be specially considered.
- (8) Access openings in the casings referred to in subsection (7)-
- (a) shall be fitted with doors complying with the requirements of subsection (1), the sills of which shall be at least 600 millimetres above the deck if in Position 1, and at least 380 millimetres above the deck if in Position 2;
 - (b) other openings in such casings shall be fitted with equivalent covers, permanently attached in their proper positions; and
 - (c) *where the provision of fixed sills as required in this section proves impracticable, consideration may be given to the provision of portable sills, subject to the requirements of subsection (4).*
- (9) Coamings of any fiddley, funnel or machinery space ventilator in an exposed position on the freeboard deck or superstructure deck shall be as high above the deck as reasonable and practicable provided that, subject to section 2.5(10), ventilators necessary to continuously supply the machinery space shall have coamings of sufficient height to comply with section 2.9(5), without having to fit weathertight closing appliances.
- (10) Where due to size of vessel or nature of the design compliance with the coaming heights required by subsection (9) for ventilators necessary to continuously supply the machinery space proves impracticable, reduced coaming heights may be accepted subject to the following-
- (a) *the ventilators are-*
 - (i) *fitted with louvres and other such devices to prevent water ingress; and*
 - (ii) *provided with permanently attached closing appliances.*
 - (b) *the ventilators and supply system is so designed to ensure that an adequate uninterrupted supply of ventilation can be maintained with the weather side closed off.*
 - (c) *the vessel can comply with the enhanced survivability standard as specified in section 4(30), with the machinery space flooded.*
- (11) Fiddley openings shall be fitted with strong covers of steel or other equivalent material permanently attached in their proper positions and capable of being secured weathertight.

2.6 Shell Openings Below the Freeboard Deck:

- (1) *Garages and other compartment(s) below the freeboard deck, provided for recreational, storing or other purposes (for Pilot Doors, see also section 11.3) to do with the business of the vessel and having access openings in the hull, shall be bounded by watertight divisions without any opening (i.e. doors, manholes, ventilation ducts or any other opening) separating the compartment(s) from any other compartment below the freeboard deck, other than sliding watertight doors complying with Chapter 4.*
- (2) Access openings in the sides of ships below the freeboard deck shall be fitted with doors so designed as to ensure the same watertightness and structural integrity as the surrounding shell plating and
 - (a) unless otherwise approved by the Administration, these opening shall open outwards; and
 - (b) the number of such openings shall be the minimum compatible with the design and proper working of the ship.
- (3) Unless otherwise permitted by the Administration, the lower edge of openings referred to in subsection (2) shall not be below a line drawn parallel to the freeboard deck at side, which is at its lowest point at least 230 millimetres above the waterline corresponding to the deepest permitted operational draft.
- (4) *Where a shell door provided in accordance with the provisions of this section cannot be tested watertight under a head of water in accordance with section 4.12(1) then the requirements applicable to flush hatches in section 2.7(4) shall apply.*

2.7 Hatchways and Coamings:

- (1) All hatchways in Positions 1 and 2 shall-
 - (a) be fitted with hatch covers of steel or other equivalent material;
 - (b) have hatch covers which shall be weathertight and fitted with gaskets and clamping devices;
 - (c) have means for securing and maintaining weathertightness which shall be to the satisfaction of the Administration;
 - (d) have arrangements which ensure that the weathertightness can be maintained in any sea conditions, and for this purpose tests for weathertightness shall be required at the initial survey and may be required at renewal and annual surveys or at more frequent intervals; and
 - (e) shall be so designed to comply with strength and securing requirements as defined in Regulation 16 of the Load Line Convention.
- (2) The coamings of hatchways shall be of substantial construction in accordance with their position, and their height above the deck shall be at least as follows-
 - (a) 600 millimetres if in position 1; and

- (b) 450 millimetres if in position 2.
- (3) In the case of hatchways which comply with regulation 16 of the Load Line Convention, as amended, the height of these coamings may be reduced, or the coamings omitted entirely, on condition that the Administration is satisfied that the safety of the ship is not thereby impaired in any sea conditions.
- (4) *Where flush deck hatches or hatches without any coamings are provided the arrangements shall comply with the following functional requirements-*
 - (a) *the hatch cover shall be watertight and meet the strength requirements of Regulation 16 of the Load Line Convention;*
 - (b) *the local deck strength is to be locally increased to avoid deformation;*
 - (c) *the hatch is to be closed at sea and marked accordingly and shall be provided with open/close indication at the navigating position;*
 - (d) *the means of securing is to be designed so as to maintain watertight integrity;*
 - (e) *the space to which the hatch leads is to be provided with low and high level bilge alarms; and*
 - (f) *the vessel can comply with the enhanced survivability standard as defined in Section 4.30 with the space **or** spaces to which the hatch leads flooded.*
 - (g) *where the hatch is provided for infrequent or emergency use only and is not used when at sea, paragraph (f) need not be complied with*
- (5) *Hatches which are designated for escape purposes shall comply with the following requirements-*
 - (a) *they shall be provided with covers which can be opened from either side and in the direction of escape they are able to be opened without a key;*
 - (b) *all handles on the inside are to be non removable; and*
 - (c) *an escape hatch shall be readily identified and easy and safe to use, having due regard to its position.*

2.8 Miscellaneous Openings in Freeboard and Superstructure Decks:

- (1) Openings in freeboard and superstructure decks shall be designed to comply with Regulation 18 of the Load Line Convention.
- (2) Where compliance with subsection (1) proves impracticable alternative arrangements for closure and coaming heights may be considered subject to the vessel being able to comply with the enhanced survivability standard in section 4.30 with the space or spaces to which the opening leads flooded.

2.9 Ventilators:

- (1) Ventilators in Position 1 and Position 2 to spaces below the freeboard deck or decks of enclosed superstructures shall be of substantial construction of steel or equivalent material and-
 - (a) ventilators in Position 1 shall have coamings of a height of at least 900 millimetres above the deck;
 - (b) ventilators in Position 2 shall have coamings of a height of at least 760 millimetres above the deck; and
 - (c) where the coaming of any ventilator exceeds 900 millimetres in height it shall be specially supported.
- (2) Ventilator openings shall be provided with weathertight closing appliances of steel or equivalent or have equivalent means of preventing ingress of water and the means of closing shall-
 - (a) in ships of less than 100 metres in length, be permanently attached to each of the ventilators; and
 - (b) in ships of 100 metres or more in length, if not permanently attached to the ventilator the means of closing shall conveniently stowed near the ventilators to which they are to be fitted.
- (3) Where due to ship design and arrangements compliance with subsections (1) and (2) is not practicable, lesser heights for ventilator coamings, fitted with weathertight closing appliances, may be permitted by the Administration in combination with other suitable arrangements to ensure an uninterrupted, adequate supply of ventilation to the spaces.
- (4) In exposed locations, the height of coamings shall be increased as required to the satisfaction of the Administration.
- (5) Subject to the meeting the requirements for fire protection contained in Chapter 6, ventilators-
 - (a) in Position 1, the coamings of which extend to more than 4.5 metres above the deck; and
 - (b) in Position 2, the coamings of which extend to more than 2.3 metres above the deck,need not be fitted with closing arrangements unless specifically required by the Administration.

2.10 Air Pipes:

- (1) Subject to the provisions of section 4.19(3), where air pipes to ballast and other tanks extend above the freeboard or superstructure decks, the exposed parts of the pipes shall be of substantial construction and the height of the air pipe from the deck to the point where water may have access to the space below shall be at least

760 millimetres on the freeboard deck and 450 millimetres on the superstructure deck.

- (2) Where these heights may interfere with the working of the ship, a lower height may be approved, provided that the Administration is satisfied that the closing arrangements and other circumstances justify a lower height.
- (3) Air pipes shall be provided with automatic closing devices.
- (4) In applying this section due regard shall be had to section 4.19(3) of the Code.

2.11 Scuppers, Inlets and Discharges:

- (1) Subject to subsection (2), scuppers, inlets and discharges are to comply with the requirements of the Load Line Convention and with section 4.16 of the Code.
- (2) *Where the provision of an automatic non return valve for an underwater exhaust is impracticable, this may be omitted subject to the following requirements-*
 - (a) *the discharge pipe shall be-*
 - (i) *of substantial thickness as defined in Classification Society Rules; and in no case shall the thickness of the pipe be less than that required for the shell plating in this location; and*
 - (ii) *provided with a positive means of closure, fitted as close to the shell outlet as practicable and operable from an accessible location above the bulkhead deck,*
 - (b) *the substantial thickness portion of the discharge shall extend from the shell outlet to a height of not less than 1000 millimetres above the deepest waterline from the valve location;*
 - (c) *the positive means of closure required in subsection (2)(a)(ii) shall be designed and installed so as to be readily accessible for routine inspection and maintenance. and*
 - (d) *low and high level bilge alarms shall be fitted in way of the exhaust discharge to provide early warning of water ingress into the hull.*

2.12 Side Scuttles and Windows:

- (1) *Side scuttles and windows, together with their frames, glasses, deadlights and storm covers, if fitted, shall meet an appropriate national or international standard; the rules regarding side scuttles and windows of a Classification Society recognised by the Administration are considered to meet these requirements.*
- (2) *Round or oval openings with an area not exceeding 0.16 metre² shall be treated as side scuttles and round or oval openings with an area exceeding 0.16 metre² shall be treated as windows.*

- (3) *Subject to subsection (2), windows are defined as being rectangular openings generally, having a radius at each corner relative to the window size.*
- (4) *Subject to subsection (5), windows shall not be fitted in the following locations-*
- (a) *below the freeboard deck; or*
 - (b) *in the first tier end bulkheads or sides of enclosed superstructures or in first tier deckhouses that are considered buoyant in the stability calculations.*
- (5) *The Administration may permit windows to be fitted in the first tier end bulkheads or sides of enclosed superstructures or deckhouses where the following conditions are satisfied-*
- (a) *where the actual freeboard exceeds that required by the Load Line Convention by at least one standard superstructure height, the entire superstructure may be considered to be 2nd tier and for the purposes of this section a standard superstructure height taken as defined in section 2.2(3). and either;*
 - (b) *subject to paragraph (c), the superstructure does not protect direct access to an opening leading below the freeboard deck or is not considered buoyant in the stability calculations; or*
 - (c) *where the superstructure protects direct access to spaces leading below the freeboard deck or is considered buoyant in the stability calculations the windows are to be designed to meet the requirements of a Type A Side Scuttle as defined in ISO 1751, taking due account of the increased panel dimensions.*
- provided that windows fitted in accordance in this section may not be fitted in stairway enclosures.*
- (6) *Proposals to fit windows in the first tier of superstructure where the excess freeboard does not meet the requirements of 2.2(3) in full may be considered by the Administration subject to-*
- (a) *an equivalent level of safety being achieved to that of having the excess freeboard required by 2.2(3);*
 - (b) *in all such cases the arrangements should comply with all other applicable provisions of this section; and*
 - (c) *the vessel shall meet the enhanced survivability standard as set out in Chapter 4 of the Code, with the space below assumed flooded.*
- (7) *Subject to subsection 2.12 (8), efficient internal deadlights, so arranged that they can be easily and effectively closed and secured watertight, shall be provided for all openings to the following spaces-*
- (a) *spaces below freeboard deck;*
 - (b) *spaces within the first tier of enclosed superstructures;*

- (c) *first tier deckhouses on the freeboard deck protecting openings leading to spaces below the freeboard deck or considered as contributing to buoyancy in stability calculations.*
- (8) *Where windows are fitted in the first tier of the superstructure or deckhouse in accordance with 2.12(5)(c) they shall be fitted using metallic frames and be provided with permanently attached deadlights except where the strength of the glazing system is considered to exceed the requirements of 2.12(15).*
- (9) *Where the strength of the glazing system exceeds the strength requirements defined in 2.12(15) deadlights may be portable provided these are stored in an easily accessible location and readily mountable in a seaway.*
- (10) *The windows and sidescuttles referred to in this section shall be of the non-opening type, except where the requirements of the Load Line Convention, Regulation 23 are met in full.*
- (11) *Side scuttles and windows shall not be fitted in such a position that their sills are below a line drawn parallel to the freeboard deck at side and having its lowest point 2.5% of the breadth (B), or 500 mm, whichever is the greatest distance, above the Summer Load Line.*
- (12) *Subject to subsection 2.12(14), side scuttles and windows at the side shell in the second tier shall be provided with hinged inside deadlights capable of being closed and secured weathertight if the superstructure protects direct access to an opening leading below or is considered buoyant in the stability calculations: provided that these may be portable where they are stored in an easily accessible location and readily and safely mounted in a seaway.*
- (13) *Subject to subsection 2.12(14) second tier side scuttles and windows in side bulkheads set inboard from the side shell which protect direct access below to spaces listed in subsection 4 shall be provided with efficient inside deadlights, so arranged that they can be easily and effectively closed and secured watertight: provided that these may be portable where they are stored in an easily accessible location and readily and safely mounted in a seaway.*
- (14) *Cabin bulkheads and doors in the second tier and above separating side scuttles and windows from a direct access leading below or the second tier considered buoyant in the stability calculations may be accepted in place of deadlights or storm covers fitted to the side scuttles and windows.*
- (15) *Windows and Sidescuttles should be of strength appropriate to their location in the vessel and comply with the applicable requirements of BSMA/ISO or equivalent international standard.*
- (16) *Where the glazing material, glazing thickness, or fixing of the windows does not meet the requirements of a recognised standard⁶, windows may be tested⁷, to the*

⁶ ISO 11336-1 Large yachts – Strength, weathertightness and watertightness of glazed openings

satisfaction of the Administration, in accordance with the provisions of paragraphs (a) to (b) below-

- (a) *the windows shall be tested to a minimum test pressure of 4 times the required design pressure derived from an appropriate national or international standard, provided that as a minimum, the calculated thicknesses should meet the Classification Society requirements for passenger carrying yachts;*
 - (b) *the testing should be undertaken at an approved test facility or witnessed by an independent third party such as a recognised Classification Society.*
- (17) *When using standards agreed by the Administration, the following minimum design heads may be assumed when determining design head pressure-*
- (a) *first tier unprotected fronts $4.5 + L/100$ metres;*
 - (b) *second tier unprotected fronts 3.5 metres; and*
 - (c) *elsewhere, 1.5 metres.*
- (18) *The glass used for side scuttles and windows-*
- (a) *shall be of the toughened safety glass type;*
 - (b) *where chemically toughened safety glass is used it shall be of the laminated type with a minimum depth of chemical toughening of 30 microns on exposed faces and regular inspections of the windows, with particular reference to the surface condition, should form part of the operational procedures and annual surveys; and*
 - (c) *where windows are permitted in first tier superstructures in accordance with section 2.12(4), the glass shall be of the laminated type and shall be designed with a load carrying capability of-*
 - (i) *100% of that required for a sidescuttle in the same location if fitted with a permanently attached deadlight; or*
 - (ii) *130% if the deadlight or storm cover is portable.*
- (19) *For all vessels, -*
- (a) *subject to paragraph (d), deadlights or storm covers⁸ are required for all windows in the front and sides of first tier and front windows of the second tier of superstructures or weathertight deckhouses above the freeboard deck;*
 - (b) *where storm covers are interchangeable port and starboard, a minimum of 50% of each size shall be provided;*

⁷ for example hydrostatic testing of the windows and frames or ISO 11336-1 Large yachts – Strength, weathertightness and watertightness of glazed openings.

⁸ Deadlights are fitted to the inside of windows and side scuttles, while storm covers are fitted to the outside of windows, where accessible, and may be hinged or portable.

- (c) *for PY-1 and PY-2 vessels, where deadlights or storm covers are not permanently attached they shall be stored in a readily accessible location and shall be readily safely mountable in a seaway.*
- (d) *proposals to dispense with the requirements for storm covers may be considered by the Administration, subject to the windows meeting an enhanced structural standard in accordance with recognised Classification Society Rules⁹, a recognized International Standard, or a factor of 1.5 applied to the design pressure of the window*
- (20) *Side and front windows to the navigating position shall not be constructed of polarised or tinted glass.*
- (21) *Fixed or opening skylights shall-*
- (a) *have a glass thickness appropriate to their size and position as required for side scuttles and windows;*
 - (b) *be provided with protection from mechanical damage to the skylight glasses in any position;*
 - (c) *except where the arrangements comply with 2.12(21) (e) and where fitted in position 1 or 2, be provided with permanently attached deadlights or storm covers; and*
 - (d) *where designated for escape purposes, shall be provided with a means of opening from either side of the skylight provided that in the direction of escape they are able to be opened without a key.*
 - (e) *the Administration may permit the deadlights or storm covers specified in paragraph (c) to be portable provided these meet an enhanced structural standard and can be easily and safely mountable in a seaway.*
- (22) *Subject to the requirements of 2.12(5), the Administration may consider proposals for bonded-in windows and glass doors subject to the following provisions-*
- (a) *proposals must include measures to ensure the integrity of the bond line taking into account environmental and ageing effects;*
 - (b) *arrangements should be such that windows and doors cannot fall into the vessel should the bond line fail or due to the effects of fire;*
 - (c) *where bonded-in windows are permitted the arrangements for deadlights or storm covers in accordance with Section 2.12(19) are to be complied with as appropriate; and*
 - (d) *when the windows and glass doors are required to be "A" Class they shall:*
 - (i) *not be required to be mechanically retained as per 6.7(45), when it is demonstrated that the window remains in the frame after the fire test to the satisfaction of the Administration.*

⁹ For illustration purposes the requirements set out in Part 4, Chapter 2 Section 11.3 of Lloyd's Registers Rules and Regulations for the Classification of Ships.

- (ii) for the application of the bonding, adhesive or seal arrangements, they may be exempt from the requirement to be constructed from steel or equivalent material and the requirement to be non-combustible.

2.13 *Garbage Chutes etc.:*

- (1) Where a garbage chute is fitted two gate valves controlled from the working deck of the chute instead of the non-return valve with a positive means of closing from a position above the freeboard deck are acceptable provided they comply with the following requirements-
 - (a) the lower gate valve shall be controlled from a position above the freeboard deck and an interlock system between the two valves shall be arranged;
 - (b) subject to paragraph (c), the inboard end shall be located above the waterline formed by an 8.5° heel to port or starboard at a draft corresponding to the lowest operational freeboard, but not less than 1,000 millimetres above that waterline;
 - (c) where the inboard end exceeds 0.01L above the waterline defined in paragraph (b), valve control from the freeboard deck is not required, provided the inboard gate valve is always accessible under service conditions; and
 - (d) alternatively, the upper and lower gate valves may be replaced by a hinged weathertight cover at the inboard end of the chute together with a discharge flap, arranged with an interlock so that the discharge flap cannot be operated until the hopper cover is closed.
- (2) The entire chute, including the cover, shall be constructed of material of substantial thickness.
- (3) The controls for the gate valves and/or hinged covers shall be clearly marked: "Keep closed when not in use".
- (4) Where the inboard end of the chute is below the freeboard deck then-
 - (a) the inboard end hinged cover/valve shall be watertight;
 - (b) the valve shall be a screw-down non-return valve fitted in an easily accessible position above the deepest load line; and
 - (c) The screw-down non-return valve shall be controlled from a position above the bulkhead deck and provided with open/closed indicators and the valve control shall be clearly marked: "Keep closed when not in use".

2.14 *Spurling Pipes and Cable Lockers:*

- (1) Spurling pipes and cable lockers shall be watertight up to the deck exposed to weather.

- (2) Where means of access are provided, they shall be closed by a substantial cover and secured by closely spaced bolts.
- (3) Spurling pipes through which anchor cables are led shall be provided with permanently attached closing appliances to minimise water ingress.

2.15 Freeing Ports and Recesses:

Freeing Ports

- (1) The standards for water freeing arrangements shall comply with Load Line Convention as far as it is reasonable and practicable to do so and in any case the intention shall be to achieve a standard of safety which is at least equivalent to the standard of the Load Line Convention.
- (2) Where a well is created on each side of the vessel between a superstructure or deckhouse, and the bulwark in way of that superstructure or deck house, the following formula may be used, in accordance with Figure 2.2, to determine the required freeing port areas on each side of the vessel for the well concerned-

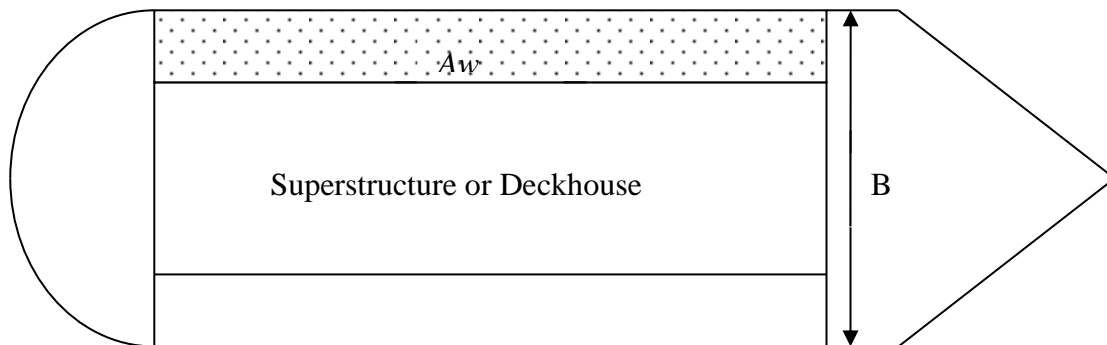


Figure 2.2

$$FP_{REQ} = \frac{0.28 \times A_w}{B}$$

Where- FP_{REQ} = Required Minimum Freeing Port Area;
 A_w = Area of well in way of superstructure; and
 B = Maximum beam at deck in way of the well.

- (3) In individual cases, when the Administration considers that the requirements of Load Line Convention with respect to freeing port areas cannot be met, the Administration may consider and approve alternative arrangements to achieve adequate safety standards which may take account of a reduced permeability and volume of a well.
- (4) For a Passenger Yacht 2 (PY2) the requirement for the minimum freeing port area for a forward or after well as determined in accordance with paragraph (2) may be reduced by a form factor equal to the ratio of $\frac{AW}{LW \times BW}$ where-

AW = Actual area of the well;

LW = Overall length of the well;

BW = Maximum breadth of the well; and

Dimensions are measured at half the height of the bulwark above the deck of the well,

provided that

- (a) the maximum reduction shall not exceed 50%;*
- (b) the stability requirements for the yacht are maintained with all the wells flooded to any level up to the height of the bulwark; and*
- (c) the freeing port area provided is sufficient to allow the well to drain in less than three minutes.*

Recesses

- (5) Any recess in the weather deck shall be of weathertight construction and shall be self draining under all normal conditions of heel and trim of the vessel; a swimming pool or spa bath, open to the elements, shall be treated as a recess.*
- (6) The means of drainage provided shall be capable of efficient operation when the vessel is heeled to an angle of 10°.*
- (7) The drainage arrangements shall have the capability of draining the recess (when fully charged with water) within 3 minutes when the vessel is upright and at the load line draft and means shall be provided to prevent the backflow of sea water into the recess.*
- (8) Where it is not practical to provide drainage which meets the requirements of subsections (6) and (7), alternative safety measures may be proposed for approval by the Administration, provided that where the above requirements for quick drainage cannot be met, the effect on intact and damage stability shall be considered taking into account the mass of water and its free surface effect.*

2.16 Protection of the Crew:

- (1) The deckhouses used for the accommodation of the crew shall be constructed to an acceptable level of strength.
- (2) Guard rails or bulwarks shall be fitted around all exposed decks and the height of the bulwarks or guard rails shall be at least 1 metre from the deck, provided that where this height would interfere with the normal operation of the ship, a lesser height may be approved provided that the Administration is satisfied that adequate protection is provided;
- (3) Guard rails fitted on superstructure and freeboard decks shall have at least three courses such that the opening below the lowest course of the guard rails shall not exceed 230 millimetres and the other courses shall be not more than 380 millimetres apart;

- (4) In the case of ships with rounded gunwales the guard rail supports shall be placed on the flat of the deck.
- (5) In other locations, guardrails with at least two courses shall be fitted.
- (6) Guard rails shall comply with the vessel's Classification Society construction requirements or the following provisions-
 - (a) fixed, removable or hinged stanchions shall be fitted about 1.5 metres apart and removable or hinged stanchions shall be capable of being locked in the upright position;
 - (b) at least every third stanchion shall be supported by a bracket or stay;
 - (c) where necessary for the normal operation of the ship, steel wire ropes may be accepted in lieu of guard rails and such wires shall be made taut by means of turnbuckles; and
 - (d) where necessary for the normal operation of the ship, chains fitted between two fixed stanchions and/or bulwarks are acceptable in lieu of guard rails.
 - (e) *a combination of bulwarks and guardrails shall be permitted providing that bulwarks comply with applicable freeing port area requirements.*
- (7) Satisfactory means for safe passage required by (in the form of guard rails, lifelines, gangways or underdeck passages, etc.) shall be provided for the protection of the crew in getting to and from their quarters, the machinery space and any other spaces used in the essential operation of the ship.

2.17 Reduced Sill Heights & Coaming *(summery of requirements from earlier sections)*

- (1) *A reduction in door sill height is allowed to the satisfaction of the Administration in accordance with section 2.5(5), provided that the vessel has increased freeboard in accordance section 2.2(2), and can comply with the enhanced survivability standard as defined in section 4.30, with the space or spaces to which the door leads flooded as per 2.17(4).*
- (2) *Hatches without any coamings are allowed in accordance with section 2.7(4), including, but not limited to, that the vessel can comply with the enhanced survivability standard as defined in Section 4.30, with the space or spaces to which the hatch leads flooded as per 2.17(4).*
- (3) *Miscellaneous Openings in Freeboard and Superstructure Decks may have reduced coamings considered in accordance with section 2.8(2) subject to the vessel being able to comply with the enhanced survivability standard in section 4.30, with the space or spaces to which the opening leads flooded as per 2.17(4).*
- (4) *Where compliance with the enhanced survivability standard in section 4.30, with the space or spaces to which the opening leads flooded is required, the compartment supplied by the opening is to be assumed to be flooded to the outside waterline. With the compartment flooded the vessel must be shown to meet the criteria set out in Section 4.30.*

This page has been intentionally inserted to preserve correct pagination.

CHAPTER 3

APPLICATION OF OTHER INTERNATIONAL CONVENTIONS AND NATIONAL LEGISLATION

3.1 Conventions - General:

Every vessel to which this Code applies shall comply with the relevant provisions of other applicable Conventions (as amended), including but not necessarily limited to the following-

- (a) *Convention on the International Regulations for Preventing Collisions at Sea, 1972, as amended (COLREG 72);*
- (b) *Convention for the Prevention of Pollution from Ships, 1973, as modified by the Protocol of 1978 relating thereto, as amended (MARPOL 73/78);*
- (c) *Convention on the Control of Harmful Anti-fouling Systems on Ships, 2001, as amended (AFS 2001);*
- (d) *Convention for the Control and Management of Ships' Ballast Water and Sediments, 2004, as amended (BWM 2004);*
- (e) *Convention on Civil Liability for Bunker Oil Pollution Damage, 2001 (bunkers 2001);*
- (f) *relevant Conventions of the International Labour Organization (ILO), including but not necessarily limited to The Maritime Labour Convention, 2006 (ILO)*
- (g) *Safety Measures for Ships Operating in Polar Waters (The Polar Code)*
 - (i) This Sub-Section applies to ships operating in polar waters, from 1 January 2017 as per SOLAS XIV & the Polar Code.
 - (ii) Ships constructed before 1 January 2017 shall meet the relevant requirements of SOLAS XIV and the Polar Code by the first intermediate or renewal survey, whichever occurs first, after 1 January 2018.
 - (iii) Every ship to which this Sub-section applies shall have on board a valid Polar Ship Certificate

3.2 Navigation Lights:

Navigation lights and shapes shall comply with the applicable provisions of COLREG 72, including the following provisions-

- (a) *all navigation lights should be provided with main and emergency power supply;*

- (b) *all navigation lights required to be shown whilst underway are required to be duplicated in accordance with IMO Resolution MSC.253(83)¹⁰ as may be amended from time to time; and*
- (c) *approved LED Lights may be used providing the lights meet the technical specifications of COLREG 72.*

3.3 Prevention of Pollution:

Every ship to which this Code applies shall comply with the applicable provisions of the Annexes to MARPOL 73/78, as amended.

3.4 Anti-Fouling Convention:

- (1) *This Convention applies to every ship of 400 gross tonnage and above*
- (2) *For EU flagged vessels exceeding 24m in length but less than 400gt REGULATION (EC) No 782/2003 on the prohibition of organotin compounds on ships states-*
"Ships of 24 metres or more in length, but less than 400 gross tonnage, shall carry an AFS-Declaration to demonstrate compliance."

3.5 Ballast Water Convention:

- (1) *The Ballast Water Management Convention will probably not enter into force before the first implementation date for ballast water treatment systems (i.e. 01 January 2009 for ships with a ballast water capacity of less than 5,000m³).*
- (2) *This implies that ships constructed after 01 January 2009 and having ballast capacity of less than 5000m³ will not have to install treatment systems on these vessels until their second annual surveys, but not later than 31 December 2011.*

3.6 Bunkers Convention:

- (1) *Ships of over 1000 gross tonnage are required to carry an appropriate level of insurance covering liability for costs arising from pollution damage following a bunker oil spill from the ship.*
- (2) *As evidence that adequate insurance cover is in place the owner or operator of the ship is required to carry a Certificate to this effect issued by the Administration.*
- (3) *The Administration will issue such a Bunkers Certificate only where it is satisfied that the insurance cover provided is acceptable.*

3.7 Ships using low-flashpoint fuels:

- (1) *The IGF Code shall apply to ships using low-flashpoint fuels:*

¹⁰ See MSC.253(83) - Adoption of the Performance Standards for Navigation Lights, Navigation Light Controllers and Associated Equipment - (Adopted on 8 October 2007).

- (a) *for which the building contract is placed on or after 1 January 2017;*
- (b) *in the absence of a building contract, the keels of which are laid or which are at a similar stage of construction on or after 1 July 2017; or*
- (c) *the delivery of which is on or after 1 January 2021*

3.8 National Legislation:

- (1) *In applying the provisions of the Code due regard shall be taken of any applicable national legislation of the Administration concerned.*

This page is intentionally added to achieve correct pagination.

CHAPTER 4

CONSTRUCTION, SUBDIVISION AND STABILITY

PART I - GENERAL

4.1 Strength of Ship and Subdivision - General:

- (1) *The Administration shall satisfy itself that the general structural strength of the ship is adequate for the draft corresponding to the freeboard assigned.*
- (2) *The ship shall in any case be constructed in accordance with the requirements of Chapter 2 (Load Lines) and it shall comply with the IMO Intact Stability Code or with intact stability standards acceptable to the Administration.*
- (3) *Ships shall be as efficiently subdivided as is possible having regard to the nature of the service for which they are intended and the degree of subdivision shall vary with the subdivision length (L_s) of the ship and with the service, in such manner that the highest degree of subdivision corresponds with the ships of greatest subdivision length (L_s), primarily engaged in the carriage of passengers.*
- (4) *Where it is proposed to fit decks, inner skins or longitudinal bulkheads of sufficient tightness to seriously restrict the flow of water, the Administration shall be satisfied that proper consideration is given to beneficial or adverse effects of such structures in the calculations.*
- (5) *The Table in Annex 3 summarises the stability provisions applicable to the various categories of Passenger Yacht.*

4.2 Application of SOLAS Provisions – General:

- (1) *Except where provided otherwise in this Chapter, all new vessels to which this Code applies are required to meet the applicable requirements of SOLAS Chapter II-1 as amended.*
- (2) *The damage stability requirements in SOLAS Chapter II-1, Parts B-1 through B-4 of those amendments shall apply to all ships, provided that for vessels up to 80m L (i.e. Load Line length), the Administration may permit the use of SOLAS 90 Deterministic methodology, in lieu of sections 4.5 and 4.6, in accordance with Part VI of this Chapter.*
- (3) *For ships of 1,600 gross tonnage and above, SOLAS Chapter II-1 Part A-1 Regulation 3-12 on the protection against noise and the Code on noise levels on board ships, adopted by the Maritime Safety Committee by resolution MSC.337(91), as may be amended by the Organization shall apply. For the purpose of this subsection, although the Code on noise levels on board ships is treated as a mandatory instrument, recommendatory parts as specified in chapter I of the Code shall be treated as non-mandatory.*

This page has been intentionally inserted to preserve correct pagination.

PART II

STABILITY

4.3 *Intact Stability and Information*¹¹:

- (1) Every ship to which this Code applies shall be inclined upon its completion and the elements of its stability determined.
- (2) Where any alterations are made to a ship so as to materially affect the stability information supplied to the master-
 - (a) amended stability information shall be provided;
 - (b) if necessary the ship shall be re-inclined; and
 - (c) the ship shall be re-inclined if anticipated deviations exceed one of the values specified in subsection (3)(b).
- (3) At periodical intervals not exceeding five years-
 - (a) a lightweight survey shall be carried out on all passenger ships to verify any changes in lightship displacement and longitudinal centre of gravity; and
 - (b) the ship shall be re-inclined whenever, in comparison with the approved stability information, a deviation from the lightship displacement exceeding 2% or a deviation of the longitudinal centre of gravity exceeding 1% of L_s is found or anticipated¹².
- (4) *In applying this section due regard shall be had to the Intact Stability Code as defined in section 1.3 of this Code and to section 2.3 of this Code.*

4.4 *Stability Information to be supplied to the Master*¹³:

- (1) The master shall be supplied with such stability information satisfactory to the Administration as is necessary to enable him by rapid and simple processes to obtain accurate guidance as to the stability of the ship under varying conditions of service and a copy of the stability information shall be furnished to the Administration.
- (2) Information shall be provided to the master-

¹¹ Refer to the Code on Intact Stability for All Types of Ships covered by IMO Instruments, adopted by the IMO by MSC.267(85).

¹² Refer to IMO Circular MSC/Circ.1158 Stability information for passenger ships and cargo ships - Lightweight check.

¹³ Refer also to the Guidelines for the preparation of intact stability information (MSC/Circ.456) and the revised guidance to the master for avoiding dangerous situations in following and quartering seas (MSC.1/Circ.1228).

- (a) in a form that is approved by the Administration or a recognised organization; and
 - (b) such information, and loading information also related to ship strength when required under subsection (1), shall be carried on board at all times together with evidence that the information has been approved by the Administration.
- (3) The information should include-
- (a) curves or tables of minimum operational metacentric height (GM) versus draught which assures compliance with the relevant intact and damage stability requirements, alternatively corresponding curves or tables of the maximum allowable vertical centre of gravity (KG) versus draught, or with the equivalents of either of these curves;
 - (b) instructions concerning the operation of cross-flooding arrangements; and
 - (c) all other data and aids which might be necessary to maintain the required intact stability and stability after damage.
- (4) The stability information shall show the influence of various trims in cases where the operational trim range exceeds $\pm 0.5\%$ of L_s .
- (5) For ships which have to fulfil the stability requirements of Part II of this Chapter, information referred to in subsection (2) is determined from considerations related to the subdivision index, in the following manner-
- (a) minimum required GM (or maximum permissible vertical position of centre of gravity KG) for the three draughts d_s , d_p and d_l are equal to the GM (or KG values) of corresponding loading cases used for the calculation of survival factor s_i ;
 - (b) for intermediate draughts, values to be used shall be obtained by linear interpolation applied to the GM value only between the deepest subdivision draught and the partial subdivision draught and between the partial load line and the light service draught respectively. Intact stability criteria will also be taken into account by retaining for each draft the maximum among minimum required GM values or the minimum of maximum permissible KG values for both criteria; and
 - (c) if the subdivision index is calculated for different trims, several required GM curves will be established in the same way.
- (6) When curves or tables of minimum operational metacentric height (GM) versus draught are not appropriate, the master should ensure that the operating condition does not deviate from a studied loading condition, or verify by calculation that the stability criteria are satisfied for this loading condition.
- (7) In applying this section due regard shall be had to the Intact Stability Code as defined in section 1.3 of this Code.

4.5 Required Subdivision Index R¹⁴:

- (1) The subdivision of a ship is considered sufficient if the attained subdivision index A, determined in accordance with section 4.6, is not less than the required subdivision index R calculated in accordance with this regulation and if, in addition, the partial indices A_s, A_p and A_i are not less than 0.9R for passenger ships.
- (2) For all passenger ships to which the damage stability requirements of this Chapter apply, the degree of subdivision to be provided shall be determined by the required subdivision index R, as follows-

$$R = 1 - \frac{5,000}{L_s + 2.5N + 15,225}$$

where:

$$N = N_1 + 2N_2;$$

N₁ = number of persons for whom lifeboats are provided¹⁵; and

N₂ = number of persons (including officers and crew) the ship is permitted to carry in excess of N₁.

- (3) Where the conditions of service are such that compliance with subsection (2) on the basis of $N = N_1 + 2N_2$ is impracticable and where the Administration considers that a suitably reduced degree of hazard exists¹⁶, a lesser value of N may be taken but in no case shall the value be less than $N = N_1 + N_2$.

4.6 Attained Subdivision Index A:

- (1) The attained subdivision index A is obtained by the summation of the partial indices A_s, A_p and A_i, (weighted as shown) calculated for the draughts d_s, d_p and d_i defined in section 1.3 in accordance with the following formula-

$$A = 0.4A_s + 0.4A_p + 0.2A_i$$

- (2) Each partial index is a summation of contributions from all damage cases taken in consideration, using the following formula-

$$A = \sum p_i s_i$$

where-

i represents each compartment or group of compartments under consideration;

¹⁴ The Maritime Safety Committee, in adopting the regulations contained in parts B to B-4 of SOLAS, as amended, invited Administrations to note that the regulations should be applied in conjunction with the explanatory notes developed by the IMO as set out in Resolution MSC.281(85) in order to ensure their uniform application.

¹⁵ Where enhanced survivability is relied upon, N₁ shall be deemed to include all persons on board.

¹⁶ Regarding the term "reduced degree of hazard", the following interpretation should be applied in accordance with Regulation 6.2.4 of the above mentioned Resolution MSC.281(85)-

"A lesser value of N, but in no case less than $N = N_1 + N_2$, may be allowed at the discretion of the Administration for passenger ships, which, in the course of their voyages, do not proceed more than 20 miles from the nearest land."

p_i accounts for the probability that only the compartment or group of compartments under consideration may be flooded, disregarding any horizontal subdivision, as defined in section 4.7; and

s_i accounts for the probability of survival after flooding the compartment or group of compartments under consideration, and includes the effect of any horizontal subdivision, as defined in section 4.8.

- (3) In the calculation of A -
 - (a) the level trim shall be used for the deepest subdivision draught and the partial subdivision draught;
 - (b) the actual service trim shall be used for the light service draught; and
 - (c) if in any service condition, the trim variation in comparison with the calculated trim is greater than 0.5% of L_s , one or more additional calculations of A are to be submitted for the same draughts but different trims so that, for all service conditions, the difference in trim in comparison with the reference trim used for one calculation will be less than 0.5% of L_s .
- (4) When determining the positive righting lever (GZ) of the residual stability curve, the displacement used should be that of the intact condition; that is, the constant displacement method of calculation should be used.
- (5) The summation indicated by the above formula shall be taken over the ship's subdivision length (L_s) for all cases of flooding in which a single compartment or two or more adjacent compartments are involved. In the case of unsymmetrical arrangements, the calculated A value should be the mean value obtained from calculations involving both sides; alternatively, it should be taken as that corresponding to the side which evidently gives the least favourable result.
- (6) Wherever wing compartments are fitted-
 - (a) contribution to the summation indicated by the formula shall be taken for all cases of flooding in which wing compartments are involved;
 - (b) additionally, cases of simultaneous flooding of a wing compartment or group of compartments and the adjacent inboard compartment or group of compartments, but excluding damage of transverse extent greater than one half of the ship breadth B , may be added; and
 - (c) for the purpose of this regulation, transverse extent is measured inboard from ship's side, at right angle to the centreline at the level of the deepest subdivision draught.
- (7) In the flooding calculations carried out according to the regulations-
 - (a) only one breach of the hull and only one free surface need to be assumed; and

- (b) the assumed vertical extent of damage is to extend from the baseline upwards to any watertight horizontal subdivision above the waterline or higher.

provided however, if a lesser extent of damage will give a more severe result, such extent is to be assumed.

- (8) If pipes, ducts or tunnels are situated within the assumed extent of damage, arrangements are to be made to ensure that progressive flooding cannot thereby extend to compartments other than those assumed flooded. However, the Administration may permit minor progressive flooding if it is demonstrated that its effects can be easily controlled and the safety of the ship is not impaired.

4.7 Calculation of the Factor p_i :

- (1) The factor p_i for a compartment or group of compartments shall be calculated in accordance with this section using the following notations-

j = the aftmost damage zone number involved in the damage starting with No.1 at the stern;

n = the number of adjacent damage zones involved in the damage;

k = is the number of a particular longitudinal bulkhead as barrier for transverse penetration in a damage zone counted from shell towards the centre line; the shell has $k = 0$;

$x1$ = the distance from the aft terminal of L_s to the aft end of the zone in question;

$x2$ = the distance from the aft terminal of L_s to the forward end of the zone in question;

b = the mean transverse distance in metres measured at right angles to the centreline at the deepest subdivision loadline between the shell and an assumed vertical plane extended between the longitudinal limits used in calculating the factor p_i and which is a tangent to, or common with, all or part of the outermost portion of the longitudinal bulkhead under consideration; this vertical plane shall be so orientated that the mean transverse distance to the shell is a maximum, but not more than twice the least distance between the plane and the shell; if the upper part of a longitudinal bulkhead is below the deepest subdivision loadline the vertical plane used for determination of b is assumed to extend upwards to the deepest subdivision waterline; in any case, b is not to be taken greater than $B/2$.

If the damage involves a single zone only:

$$p_i = p(x1_j, x2_j) \cdot [r(x1_j, x2_j, b_k) - r(x1_j, x2_j, b_{k-1})]$$

If the damage involves two adjacent zones:

$$p_i = p(x1_j, x2_{j+1}) \cdot [r(x1_j, x2_{j+1}, b_k) - r(x1_j, x2_{j+1}, b_{k-1})] \\ - p(x1_j, x2_j) \cdot [r(x1_j, x2_j, b_k) - r(x1_j, x2_j, b_{k-1})]$$

$$- p(x_{1j+1}, x_{2j+1}) \cdot [r(x_{1j+1}, x_{2j+1}, b_k) - r(x_{1j+1}, x_{2j+1}, b_{k-1})]$$

If the damage involves three or more adjacent zones:

$$\begin{aligned} p_i = & p(x_{1j}, x_{2j+n-1}) \cdot [r(x_{1j}, x_{2j+n-1}, b_k) - r(x_{1j}, x_{2j+n-1}, b_{k-1})] \\ & - p(x_{1j}, x_{2j+n-2}) \cdot [r(x_{1j}, x_{2j+n-2}, b_k) - r(x_{1j}, x_{2j+n-2}, b_{k-1})] \\ & - p(x_{1j+1}, x_{2j+n-1}) \cdot [r(x_{1j+1}, x_{2j+n-1}, b_k) - r(x_{1j+1}, x_{2j+n-1}, b_{k-1})] \\ & + p(x_{1j+1}, x_{2j+n-2}) \cdot [r(x_{1j+1}, x_{2j+n-2}, b_k) - r(x_{1j+1}, x_{2j+n-2}, b_{k-1})] \end{aligned}$$

and where $r(x_1, x_2, b_0) = 0$

(2) The factor $p(x_1, x_2)$ is to be calculated according to the following formulae-

Overall normalised max damage length: $J_{\max} = 10/33$

Knuckle point in the distribution: $J_{kn} = 5/33$

Cumulative probability at J_{kn} : $p_k = 11/12$

Maximum absolute damage length: $l_{\max} = 60$ metres

Length where normalised distribution ends: $L^* = 260$ metres

Probability density at $J = 0$:

$$b_0 = 2 \left(\frac{p_k}{J_{kn}} - \frac{1 - p_k}{J_{\max} - J_{kn}} \right)$$

When $L_s \leq L^*$:

$$J_m = \min \left\{ J_{\max}, \frac{l_{\max}}{L_s} \right\}$$

$$J_k = \frac{J_m}{2} + \frac{1 - \sqrt{1 + (1 - 2p_k)b_0J_m + \frac{1}{4}b_0^2J_m^2}}{b_0}$$

$$b_{12} = b_0$$

When $L_s > L^*$:

$$J_m^* = \min \left\{ J_{\max}, \frac{l_{\max}}{L^*} \right\}$$

$$J_k^* = \frac{J_m^*}{2} + \frac{1 - \sqrt{1 + (1 - 2p_k)b_0J_m^* + \frac{1}{4}b_0^2J_m^{*2}}}{b_0}$$

$$J_m = \frac{J_m^* \cdot L^*}{L_s}$$

$$J_k = \frac{J_k^* \cdot L^*}{L_s}$$

$$b_{12} = 2 \left(\frac{p_k}{J_k} - \frac{1 - p_k}{J_m - J_k} \right)$$

$$b_{11} = 4 \frac{1 - p_k}{(J_m - J_k)J_k} - 2 \frac{p_k}{J_k^2}$$

$$b_{21} = -2 \frac{1 - p_k}{(J_m - J_k)^2}$$

$$b_{22} = -b_{21}J_m$$

The non-dimensional damage length:

$$J = \frac{(x_2 - x_1)}{L_s}$$

The normalised length of a compartment or group of compartments J_n is to be taken as the lesser of J and J_m

- (3) Where neither limit of the compartment or group of compartments under consideration coincides with the aft or forward terminals-

$J \leq J_k$:

$$p(x_1, x_2) = p_1 = \frac{1}{6} J^2 (b_{11}J + 3b_{12})$$

$J > J_k$:

$$\begin{aligned} p(x_1, x_2) &= p_2 \\ &= -\frac{1}{3} b_{11} J_k^3 + \frac{1}{2} (b_{11}J - b_{12}) J_k^2 + b_{12} J J_k \\ &\quad - \frac{1}{3} b_{21} (J_n^3 - J_k^3) \\ &\quad + \frac{1}{2} (b_{21}J - b_{22}) (J_n^2 - J_k^2) + b_{22} J (J_n - J_k) \end{aligned}$$

- (4) Where the aft limit of the compartment or group of compartments under consideration coincides with the aft terminal or the forward limit of the compartment or group of compartments under consideration coincides with the forward terminal-

$J \leq J_k$:

$$p(x_1, x_2) = \frac{1}{2} (p_1 + J)$$

$J > J_k$:

$$p(x1, x2) = \frac{1}{2}(p_2 + J)$$

- (5) Where the compartment or groups of compartments considered extends over the entire subdivision length (L_s)-

$$p(x1, x2) = 1$$

- (6) The factor $r(x1, x2, b)$ shall be determined by the following formulae-

$$r(x1, x2, b) = 1 - (1 - C) \cdot \left[1 - \frac{G}{p(x1, x2)} \right]$$

where-

$$C = 12 \cdot J_b \cdot (-45 \cdot J_b + 4); \text{ and}$$

$$J_b = \frac{b}{15 \cdot B}$$

- (7) Where the compartment or groups of compartments considered extends over the entire subdivision length (L_s)-

$$G = G_1 = \frac{1}{2} b_{11} J_b^2 + b_{12} J_b$$

- (8) Where neither limits of the compartment or group of compartments under consideration coincides with the aft or forward terminals-

$$G = G_2 = -\frac{1}{3} b_{11} J_0^3 + \frac{1}{2} (b_{11} J - b_{12}) J_0^2 + b_{12} J J_0$$

where-

$$J_0 = \min(J, J_b)$$

- (9) Where the aft limit of the compartment or group of compartments under consideration coincides with the aft terminal or the forward limit of the compartment or group of compartments under consideration coincides with the forward terminal-

$$G = \frac{1}{2} (G_2 + G_1 \cdot J)$$

4.8 Calculation of the Factor s_i :

- (1) The factor s_i shall be determined for each case of assumed flooding, involving a compartment or group of compartments, in accordance with the following notations and the provisions in this section, where-

θ_e is the equilibrium heel angle in any stage of flooding, in degrees;

θ_v is the angle, in any stage of flooding, where the righting lever becomes negative, or the angle at which an opening incapable of being closed weathertight becomes submerged;

GZ_{max} is the maximum positive righting lever, in metres, up to the angle θ_v ;

Range is the range of positive righting levers, in degrees, measured from the angle θ_e ; the positive range is to be taken up to the angle θ_v ;

Flooding stage is any discrete step during the flooding process, including the stage before equalisation (if any) until final equilibrium has been reached.

- (2) The factor s_i for any damage case at any initial loading condition, d_i , shall be obtained from the formula-

$$s_i = \text{minimum} \{ s_{\text{intermediate},i} \text{ Or } s_{\text{final},i} \cdot s_{\text{mom},i} \}$$

where-

$s_{\text{intermediate},i}$ is the probability to survive all intermediate flooding stages until the final equilibrium stage, and is calculated in accordance with subsection 3;

$s_{\text{final},i}$ is the probability to survive in the final equilibrium stage of flooding, calculated in accordance with subsection 4; and

$s_{\text{mom},i}$ is the probability to survive heeling moments, and is calculated in accordance with subsection 5.

- (3) The factor $s_{\text{intermediate},i}$ shall be taken as the least of the s -factors obtained from all flooding stages including the stage before equalisation, if any, and is to be calculated as follows-

$$s_{\text{intermediate},i} = \left[\frac{GZ_{max}}{0.05} \cdot \frac{Range}{7} \right]^{\frac{1}{4}}$$

where-

GZ_{max} is not to be taken as more than 0.05 metres and *Range* as not more than 7° ;

$s_{\text{intermediate}} = 0$, if the intermediate heel angle exceeds 15° ; and the time for equalisation shall not exceed 10 minutes where cross-flooding fittings are required.

- (4) The factor $s_{\text{final},i}$ shall be obtained from the formula-

$$s_{\text{final},i} = K \cdot \left[\frac{GZ_{max}}{0.12} \cdot \frac{Range}{16} \right]^{\frac{1}{4}}$$

where:

GZ_{max} is not to be taken as more than 0.12 metres;

Range is not to be taken as more than 16° ;

$$K = 1 \text{ if } \theta_e \leq \theta_{min}$$

$$K = 0 \text{ if } \theta_e \geq \theta_{max}$$

$$K = \sqrt{\frac{\theta_{max} - \theta_e}{\theta_{max} - \theta_{min}}} \quad \text{otherwise,}$$

and where:

θ_{min} is 7° for passenger ships; and

θ_{max} is 15° for passenger ships.

- (5) The factor $s_{mom,i}$ shall be calculated at the final equilibrium from the formula-

$$S_{mom,i} = \frac{(GZ_{max} - 0.04) \cdot Displacement}{M_{heel}}$$

where:

Displacement is the intact displacement at the subdivision draught;

M_{heel} is the maximum assumed heeling moment as calculated in accordance with paragraph 4.1; and

$$S_{mom,i} \leq 1.$$

- (6) The heeling moment M_{heel} is to be calculated as follows-

$$M_{heel} = \text{maximum}\{M_{passenger} \text{ or } M_{wind} \text{ or } M_{survival craft}\}$$

- (7) $M_{passenger}$ is the maximum assumed heeling moment resulting from movement of passengers, and is to be obtained as follows-

- (a) by the formula

$$M_{passenger} = (0.075 \cdot N_p) \cdot (0.45 \cdot B) \text{ (tm)}$$

where-

N_p is the maximum number of passengers permitted to be on board in the service condition corresponding to the deepest subdivision draught under consideration; and

B is the beam of the ship.

- (b) alternatively, the heeling moment may be calculated assuming the passengers are distributed with 4 persons per square metre on available deck areas towards one side of the ship on the decks where muster stations are located and in such a way that they produce the most adverse heeling moment and in doing so, a weight of 75 kg per passenger is to be assumed.

- (8) M_{wind} is the maximum assumed wind force acting in a damage situation calculated in accordance with the following formula-

$$M_{wind} = (P \cdot A \cdot Z) / 9,806 \text{ (tm)}$$

where:

$$P = 120 \text{ N/m}^2;$$

A = projected lateral area above waterline;

Z = distance from centre of lateral projected area above waterline to $T/2$;

and

T = ship's draught, d_i .

- (9) $M_{Survivalcraft}$ is the maximum assumed heeling moment due to the launching of all fully loaded davit-launched survival craft on one side of the ship and it shall be calculated using the following assumptions-
- (a) all lifeboats and rescue boats fitted on the side to which the ship has heeled after having sustained damage shall be assumed to be swung out fully loaded and ready for lowering;
 - (b) for lifeboats which are arranged to be launched fully loaded from the stowed position, the maximum heeling moment during launching shall be taken;
 - (c) a fully loaded davit-launched liferaft attached to each davit on the side to which the ship has heeled after having sustained damage shall be assumed to be swung out ready for lowering;
 - (d) persons not in the life-saving appliances which are swung out shall not provide either additional heeling or righting moment; and
 - (e) life-saving appliances on the side of the ship opposite to the side to which the ship has heeled shall be assumed to be in a stowed position.
- (10) Unsymmetrical flooding is to be kept to a minimum consistent with the efficient arrangements in accordance with the following provisions-
- (a) where it is necessary to correct large angles of heel, the means adopted shall, where practicable, be self-acting, but in any case where controls to equalisation devices are provided they shall be operable from above the bulkhead deck;
 - (b) these fittings together with their controls shall be acceptable to the Administration¹⁷ and suitable information concerning the use of equalisation devices shall be supplied to the master of the ship;
 - (c) tanks and compartments taking part in such equalisation shall be fitted with air pipes or equivalent means of sufficient cross-section to ensure that the flow of water into the equalisation compartments is not delayed.
- (11) In all cases, s_i is to be taken as zero in those cases where the final waterline, taking into account sinkage, heel and trim, immerses-
- (a) the lower edge of openings through which progressive flooding may take place and such flooding is not accounted for in the calculation of factor s_i ; such openings shall include air-pipes, ventilators and openings which are closed by means of weathertight doors or hatch covers; and
 - (b) any part of the bulkhead deck in passenger ships considered a horizontal evacuation route for compliance with Chapter II-2 of SOLAS as amended.
- (12) The factor s_i is to be taken as zero if, taking into account sinkage, heel and trim, any of the following occur in any intermediate stage or in the final stage of flooding-

¹⁷ Reference is made to the Recommendation on a standard method for evaluating cross-flooding arrangements in passenger ships, adopted by the IMO by Resolution MSC.245(83), as may be amended.

- (a) immersion of any vertical escape hatch in the bulkhead deck intended for compliance with Chapter II-2 of SOLAS as amended;
- (b) any controls intended for the operation of watertight doors, equalisation devices, valves on piping or on ventilation ducts intended to maintain the integrity of watertight bulkheads from above the bulkhead deck become inaccessible or inoperable; and
- (c) immersion of any part of piping or ventilation ducts carried through a watertight boundary that is located within any compartment included in damage cases contributing to the attained index A, if not fitted with watertight means of closure at each boundary,

provided however that where compartments assumed flooded due to progressive flooding are taken into account in the damage stability calculations multiple values of $s_{\text{intermediate},i}$ may be calculated assuming equalisation in additional flooding phases.

- (13) Except as provided in section 4.8(12)(a), openings closed by means of watertight manhole covers and flush scuttles, small watertight hatch covers, remotely operated sliding watertight doors, side scuttles of the non-opening type as well as watertight access doors and hatch covers required to be kept closed at sea need not be considered.
- (14) Where horizontal watertight boundaries are fitted above the waterline under consideration the s -value calculated for the lower compartment or group of compartments shall be obtained by multiplying the value as determined in section 4.8(2) by the reduction factor v_m according to section 4.8(15), which represents the probability that the spaces above the horizontal subdivision will not be flooded.
- (15) The factor v_m shall be obtained from the formula-

$$v_m = v(H_{j, n, m}, d) - v(H_{j, n, m-1}, d)$$

where-

- $H_{j, n, m}$ is the least height above the baseline, in metres, within the longitudinal range of $x_{1(j)} \dots x_{2(j+n-1)}$ of the m^{th} horizontal boundary which is assumed to limit the vertical extent of flooding for the damaged compartments under consideration;
- $H_{j, n, m-1}$ is the least height above the baseline, in metres, within the longitudinal range of $x_{1(j)} \dots x_{2(j+n-1)}$ of the $(m-1)^{\text{th}}$ horizontal boundary which is assumed to limit the vertical extent of flooding for the damaged compartments under consideration;
- j signifies the aft terminal of the damaged compartments under consideration;
- m represents each horizontal boundary counted upwards from the waterline under consideration;
- d is the draft in question as defined in section 1.3; and

x_1 and x_2 represent the terminals of the compartment or group of compartments considered in section 4.7.

- (16) The factors $v(H_{j, n, m}, d)$ and $v(H_{j, n, m-1}, d)$ shall be obtained from the formulae-

$$v(H, d) = 0.8 \frac{(H-d)}{7.8}, \text{ if } (H_m - d) \text{ is less than, or equal to 7.8 metres;}$$

$$v(H, d) = 0.8 + 0.2 \left[\frac{(H-d)-7.8}{4.7} \right] \text{ in all other cases,}$$

where-

$v(H_{j, n, m}, d)$ is to be taken as 1, if H_m coincides with the uppermost watertight boundary of the ship within the range $(x_{1(j)} \dots x_{2(j+n-1)})$ and
 $v(H_{j, n, 0}, d)$ is to be taken as 0;

and in no case is v_m to be taken as less than zero or more than 1.

- (17) In general, each contribution dA to the index A in the case of horizontal subdivisions is obtained from the formula-

$$dA = p_i \cdot [v_1 \cdot s_{min1} + (v_2 - v_1) \cdot s_{min2} + \dots + (1 - v_{m-1}) \cdot s_{min m}]$$

where

v_m the v -value calculated in accordance with section 4.7(15);

s_{min} the least s -factor for all combinations of damages obtained when the assumed damage extends from the assumed damage height H_m downwards.

4.9 Permeability:

- (1) For the purpose of the subdivision and damage stability calculations of the regulations, the permeability of each compartment or part of a compartment shall be as follows-

SPACE	PERMEABILITY
Appropriated to stores.	0.60
Occupied by accommodation.	0.95
Occupied by machinery.	0.85
Void spaces.	0.95
<i>Spaces similar to dry cargo spaces such as storage spaces and the like.</i>	0.95
Intended for liquid.	0 0 or 0.95 (Whichever results in the more severe requirement)

- (2) Other figures for permeability may be used if substantiated by calculations.

4.10 Requirements Concerning Passenger Ship Stability:

- (1) A passenger ship intended to carry 36 or more persons is to be capable of withstanding damage along the side shell to an extent specified in subsection (2) and compliance with this section is to be achieved by demonstrating that s_i , as defined in section 4.8(2), is not less than 0.9 for the three loading conditions on which is based the calculation of the subdivision index.
- (2) The damage extent to be assumed when demonstrating compliance with section 4.10(1), is to be dependent on both N and L_s , as defined in section 1.3 and subsection 4.5(2) respectively, such that-
- (a) the vertical extent of damage is to extend from the ship's moulded baseline to a position up to 12.5 metres above the position of the deepest subdivision draft as defined in section 1.3 unless a lesser vertical extent of damage were to give a lower value of s_i , in which case this reduced extent is to be used;
 - (b) where 400 or more persons are to be carried, a damage length of $0.03L_s$ but not less than 3 m is to be assumed at any position along the side shell, in conjunction with a penetration inboard of $0.1B$ but not less than 0.75 m measured inboard from the ship side, at right angles to the centreline at the level of the deepest subdivision draught;
 - (c) where less than 400 persons are carried, damage length is to be assumed at any position along the shell side between transverse watertight bulkheads provided that the distance between two adjacent transverse watertight bulkheads is not less than the assumed damage length; if the distance between adjacent transverse watertight bulkheads is less than the assumed damage length, only one of these bulkheads shall be considered effective for the purpose of demonstrating compliance with section 4.10(1);
 - (d) where 36 persons are carried, a damage length of $0.015L_s$ but not less than 3 metres is to be assumed, in conjunction with a penetration inboard of $0.05B$ but not less than 0.75 metres; and
 - (e) where more than 36, but fewer than 400 persons are carried the values of damage length and penetration inboard, used in the determination of the assumed extent of damage, are to be obtained by linear interpolation between the values of damage length and penetration which apply for ships carrying 36 persons and 400 persons as specified in sections 4.10(2)(d) and 4.10(2)(b).

PART III

SUBDIVISION, WATERTIGHT AND WEATHERTIGHT INTEGRITY

4.11 *Double Bottoms:*

- (1) *Subject to paragraphs (a) to (c), a double bottom shall be fitted extending from the collision bulkhead to the afterpeak bulkhead, as far as this is practicable and compatible with the design and proper working of the ship-*
 - (a) *in ships of 50 metres and upwards but less than 61 m in length a double bottom shall be fitted at least from the machinery space to the forepeak bulkhead, or as near thereto as practicable;*
 - (b) *in ships of 61 metres and upwards but less than 76 m in length a double bottom shall be fitted at least outside the machinery space, and shall extend to the fore and after peak bulkheads, or as near thereto as practicable;*
 - (c) *subject to paragraph (c), in ships of 76 metres in length and upwards, a double bottom shall be fitted amidships, and shall extend to the fore and after peak bulkheads, or as near thereto as practicable; and*
 - (d) *for vessels assessed in accordance with the probabilistic means in accordance with Parts B-1 through B-4 of SOLAS, where it is deemed that the installation of a double bottom is impracticable in accordance with paragraph (c), the vessel must be able to demonstrate compliance with the enhanced survivability criteria defined in section 4.30 of the Code, following the occurrence of bottom damage in the area concerned.*
- (2) Where a double bottom is required to be fitted the inner bottom shall be continued out to the ship's sides in such a manner as to protect the bottom to the turn of the bilge; such protection will be deemed satisfactory if the inner bottom is not lower at any part than a plane parallel with the keel line and which is located not less than a vertical distance h measured from the keel line, as calculated by the formula-
$$h = B/20,$$
provided that in no case is the value of h to be less than 760 millimetres and need not be taken as more than 2,000 millimetres.
- (3) Small wells constructed in the double bottom in connection with drainage arrangements of storage spaces, etc., shall not extend downward more than necessary, provided that-
 - (a) a well extending to the outer bottom is, however, permitted at the after end of the shaft tunnel;
 - (b) other wells (e.g., for lubricating oil under main engines) may be permitted by the Administration if satisfied that the arrangements give protection equivalent to that afforded by a double bottom complying with this regulation; and

- (c) in no case shall the vertical distance from the bottom of such a well to a plane coinciding with the keel line be less than 500 millimetres.
- (4) A double bottom need not be fitted in way of watertight tanks, including dry tanks of moderate size, provided the safety of the ship is not impaired in the event of bottom or side damage.
- (5) Any part of a passenger ship that is not fitted with a double bottom in accordance with subsections (1) or (4) shall be capable of withstanding bottom damages, as specified in section 4.11(7), in that part of the ship.
- (6) In the case of unusual bottom arrangements in a passenger ship it shall be demonstrated that the ship is capable of withstanding bottom damages as specified in section 4.11(7).
- (7) Compliance with subsections (5) or (6) is to be achieved by demonstrating that s_i , when calculated in accordance with section 4.8 is not less than 1 for all service conditions when subject to a bottom damage assumed at any position along the ship's bottom in accordance with the following conditions and with an extent specified in subsection (2) for the affected part of the ship-

- (a) Flooding of such spaces shall not render emergency power and lighting, internal communication, signals or other emergency devices inoperable in other parts of the ship.
- (b) Assumed extent of damage shall be as follows-

Extent	For 0.3 L from the forward perpendicular of the ship	Any other part of the ship
Longitudinal extent	$1/3 L^{2/3}$ or 14.5 metres, whichever is less	$1/3 L^{2/3}$ or 14.5 metres, whichever is less
Transverse extent	$B/6$ or 10 metres, whichever is less	$B/6$ or 5 metres, whichever is less
Vertical extent, measured from the keel line	$B/20$ or 2 metres, whichever is less	$B/20$ or 2 metres, whichever is less

- (c) If any damage of a lesser extent than the maximum damage specified in section 4.11(7)(b) would result in a more severe condition, such damage should be considered.
- (8) In case of large lower compartments in passenger ships-
- (a) the Administration may require an increased double bottom height of not more than $B/10$ or 3 metres, whichever is less, measured from the keel line;
- (b) alternatively, bottom damages may be calculated for these areas, in accordance with subsection (7), but assuming an increased vertical extent.

4.12 Construction of Watertight Bulkheads:

- (1) Each watertight subdivision bulkhead, whether transverse or longitudinal, shall be constructed having scantlings as specified in section 1.3, in the definition for “watertight”, and in all cases, watertight subdivision bulkheads shall be capable of supporting at least the pressure due to a head of water up to the bulkhead deck.
- (2) Steps and recesses in watertight bulkheads shall be as strong as the bulkhead at the place where each occurs.

4.13 Initial Testing of Watertight Bulkheads, etc.:

- (1) Testing of watertight spaces not intended to hold by filling them with water is not compulsory but where such testing is not carried out-
 - (a) a hose test shall be carried out where practicable;
 - (b) this test shall be carried out in the most advanced stage of the fitting out of the ship;
 - (c) where a hose test is not practicable because of possible damage to machinery, electrical equipment insulation or outfitting items, it may be replaced by a careful visual examination of welded connections, supported where deemed necessary by means such as a dye penetrant test or an ultrasonic leak test or an equivalent test; and
 - (d) in any case a thorough inspection of the watertight bulkheads shall be carried out.
- (2) The forepeak, double bottom (including duct keels) and inner skins shall be tested with water to a head corresponding to the requirements of section 4.12(1).
- (3) Tanks which are intended to hold liquids, and which form part of the watertight subdivision of the ship, shall be tested for tightness and structural strength with water to a head corresponding to its design pressure and the water head is in no case to be less than the top of the air pipes or to a level of 2.4 metres above the top of the tank, whichever is the greater.
- (4) The tests referred to in subsections (2) and (3) are for the purpose of ensuring that the subdivision structural arrangements are watertight and are not to be regarded as a test of the fitness of any compartment for the storage of oil fuel or for other special purposes for which a test of a superior character may be required depending on the height to which the liquid has access in the tank or its connections.

4.14 Peak and Machinery Space Bulkheads, Shaft Tunnels, etc.:

- (1) A collision bulkhead shall be fitted which shall be watertight up to the bulkhead deck and this bulkhead shall be located at a distance from the forward perpendicular of not less than $0.05L$ or 10 metres, whichever is the less, and,

except as may be permitted by the Administration, not more than $0.08L$ or $0.05L + 3$ metres, whichever is the greater.

- (2) Where any part of the ship below the waterline extends forward of the forward perpendicular, e.g., a bulbous bow, the distances stipulated in subsection (1) shall be measured from a point either-
 - (a) at the mid-length of such extension;
 - (b) at a distance $0.015L$ forward of the forward perpendicular; or
 - (c) at a distance 3 metres forward of the forward perpendicular,whichever gives the smallest measurement.
- (3) The bulkhead may have steps or recesses provided they are within the limits prescribed in subsections (1) or (2).
- (4) No doors, manholes, access openings, ventilation ducts or any other openings shall be fitted in the collision bulkhead below the bulkhead deck.
- (5) The collision bulkhead shall comply with the following provisions-
 - (a) except as provided in paragraph (b), the collision bulkhead may be pierced below the bulkhead deck by not more than one pipe for dealing with fluid in the forepeak tank, provided that the pipe is fitted with a screw-down valve capable of being operated from above the bulkhead deck, the valve chest being secured inside the forepeak to the collision bulkhead, provided that-
 - (i) the Administration may, however, authorise the fitting of this valve on the after side of the collision bulkhead where that the valve is readily accessible under all service conditions and the space in which it is located is not a storage space;
 - (ii) all valves shall be of steel, bronze or other approved ductile material; and
 - (iii) valves of ordinary cast iron or similar material are not acceptable.
 - (b) If the forepeak is divided to hold two different kinds of liquids the Administration may allow the collision bulkhead to be pierced below the bulkhead deck by two pipes, each of which is fitted as required by paragraph (a), provided the Administration is satisfied that there is no practical alternative to the fitting of such a second pipe and that, having regard to the additional subdivision provided in the forepeak, the safety of the ship is maintained.
- (6) Where a long forward superstructure is fitted-
 - (a) the collision bulkhead shall be extended weathertight to the deck next above the bulkhead deck;

- (b) the extension need not be fitted directly above the bulkhead below provided it is located within the limits prescribed in subsection (1) or (2) and that the part of the deck which forms the step is made effectively weathertight; and
- (7) The number of openings in the extension of the collision bulkhead above the freeboard deck shall be restricted to the minimum compatible with the design and normal operation of the ship and all such openings shall be capable of being closed weathertight.
- (8) Bulkheads shall be fitted separating the machinery space accommodation spaces forward and aft and made watertight up to the bulkhead deck and in passenger ships an afterpeak bulkhead shall also be fitted and made watertight up to the bulkhead deck, provided that the afterpeak bulkhead may, however, be stepped below the bulkhead deck, providing the degree of safety of the ship as regards subdivision is not thereby diminished.
- (9) In all cases stern tubes shall be enclosed in watertight spaces of moderate volume and the stern gland shall be situated in a watertight shaft tunnel or other watertight space separate from the stern tube compartment and of such volume that, if flooded by leakage through the stern gland, the bulkhead deck will not be immersed.

4.15 Openings in Watertight Bulkheads below the Bulkhead Deck:

- (1) The number of openings in watertight bulkheads shall be reduced to the minimum compatible with the design and proper working of the ship, satisfactory means shall be provided for closing these openings.
- (2) Watertight bulkhead integrity shall be maintained in accordance with the following provisions-
 - (a) where pipes, scuppers, electric cables, etc., are carried through watertight bulkheads, arrangements shall be made to ensure the watertight integrity of the bulkheads;
 - (b) valves not forming part of a piping system shall not be permitted in watertight bulkheads; and
 - (c) lead or other heat sensitive materials shall not be used in systems which penetrate watertight bulkheads, where deterioration of such systems in the event of fire would impair the watertight integrity of the bulkheads.
- (3) *No doors, manholes, or access openings are permitted in watertight transverse bulkheads dividing a storage space from an adjoining storage space, except as provided in section 4.15(9).*
- (4) Subject to section 4.15(10)-
 - (a) not more than one door, apart from the doors to shaft tunnels, may be fitted in each watertight bulkhead within spaces containing the main and auxiliary propulsion machinery including boilers serving the needs of propulsion;

- (b) where two or more shafts are fitted, the tunnels shall be connected by an intercommunicating passage;
 - (c) there shall be only one door between the machinery space and the tunnel spaces where two shafts are fitted and only two doors where there are more than two shafts;
 - (d) all these doors shall be of the sliding type and shall be so located as to have their sills as high as practicable; and
 - (e) the hand gear for operating these doors from above the bulkhead deck shall be situated outside the spaces containing the machinery.
- (5) Watertight doors shall comply with the following general provisions-
- (a) watertight doors, except as provided in section 4.15(9), shall be power-operated sliding doors complying with the requirements of section 4.15(7) capable of being closed simultaneously from the central operating console at the navigation bridge in not more than 60 seconds with the ship in the upright position; and
 - (b) the means of operation whether by power or by hand of any power-operated sliding watertight door shall be capable of closing the door with the ship listed to 15° either way and consideration shall also be given to the forces which may act on either side of the door as may be experienced when water is flowing through the opening applying a static head equivalent to a water height of at least 1 metre above the sill on the centreline of the door;
 - (c) watertight doors and their controls, including hydraulic piping and electric cables shall comply with the following provisions
 - (iv) the controls shall be kept as close as practicable to the bulkhead in which the doors are fitted, in order to minimise the likelihood of them being involved in any damage which the ship may sustain; and
 - (v) the positioning of watertight doors and their controls shall be such that if the ship sustains damage within one fifth of the breadth of the ship, as defined in section 1.3 such distance being measured at right angles to the centreline at the level of the deepest subdivision draught, the operation of the watertight doors clear of the damaged portion of the ship is not impaired.
- (6) All power-operated sliding watertight doors shall-
- (a) be provided with means of indication which will show at all remote operating positions whether the doors are open or closed; and
 - (b) have their remote operating positions only at the navigation bridge as required by section 4.15(7)(a)(v) and at the location where hand operation above the bulkhead deck is required by section 4.15(7)(a)(iv).
- (7) Watertight doors shall comply with the following provisions-
- (a) Each power-operated sliding watertight door shall-

- (i) have a vertical or horizontal motion;
- (ii) subject to section 4.15(10), be normally limited to a maximum clear opening width of 1.2 metres; provided that the Administration may permit larger doors only to the extent considered necessary for the effective operation of the ship provided that other safety measures, including the following, are taken into consideration-
 - (ba) special consideration shall be given to the strength of the door and its closing appliances in order to prevent leakages; and
 - (bb) the door shall be located inboard the damage zone B/5;
- (iii) be fitted with the necessary equipment to open and close the door using electric power, hydraulic power, or any other form of power that is acceptable to the Administration;
- (iv) be provided with an individual hand-operated mechanism such that it shall be possible to open and close the door by hand at the door itself from either side, and in addition, close the door from an accessible position above the bulkhead deck with an all round crank motion or some other movement providing the same degree of safety acceptable to the Administration and the direction of rotation or other movement is to be clearly indicated at all operating positions; the time necessary for the complete closure of the door, when operating by hand gear, shall not exceed 90 seconds with the ship in the upright position;
- (v) be provided with controls for opening and closing the door by power from both sides of the door and also for closing the door by power from the central operating console at the navigation bridge;
- (vi) be provided with an audible alarm in accordance with the following provisions-
 - (ba) it shall be distinct from any other alarm in the area;
 - (bb) it shall sound whenever the door is closed remotely by power and shall sound for at least 5 seconds but no more than 10 seconds before the door begins to move and shall continue sounding until the door is completely closed; provided that in the case of remote hand operation it is sufficient for the audible alarm to sound only when the door is moving; and
 - (bc) additionally, in passenger areas and areas of high ambient noise the Administration may require the audible alarm to be supplemented by an intermittent visual signal at the door;
- (vii) have an approximately uniform rate of closure under power and the closure time, from the time the door begins to move to the time it reaches the completely closed position shall in no case be

less than 20 seconds or more than 40 seconds with the ship in the upright position;

- (b) The electrical power required for-
 - (i) power-operated sliding watertight doors shall be supplied from the emergency switchboard either directly or by a dedicated distribution board situated above the bulkhead deck;
 - (ii) the associated control, indication and alarm circuits shall be supplied from the emergency switchboard either directly or by a dedicated distribution board situated above the bulkhead deck and be capable of being automatically supplied by the transitional source of emergency electrical power required by Regulation 42 of Chapter II-1 D of SOLAS, in accordance with Chapter 5 of this Code, in the event of failure of either the main or emergency source of electrical power.
- (c) Power-operated sliding watertight doors shall have either-
 - (i) a centralised hydraulic system complying with the following provisions-
 - (ba) two independent power sources each consisting of a motor and pump capable of simultaneously closing all doors;
 - (bb) having, for the whole installation, hydraulic accumulators of sufficient capacity to operate all the doors at least three times, i.e. closed-open-closed, against an adverse list of 15°;
 - (bc) the operating cycle referred to in sub-subparagraph (bb) above shall be capable of being carried out when the accumulator is at the pump cut-in pressure;
 - (bd) the fluid used in the system shall be chosen considering the temperatures liable to be encountered by the installation during its service;
 - (be) the power operating system shall be designed to minimise the possibility of having a single failure in the hydraulic piping adversely affect the operation of more than one door;
 - (bf) the hydraulic system shall be provided with a low-level alarm for hydraulic fluid reservoirs serving the power-operated system and a low gas pressure alarm or other effective means of monitoring loss of stored energy in hydraulic accumulators; and
 - (bg) the alarm referred to in sub-subparagraph (bf) above is to be audible and visual and shall be situated on the central operating console at the navigation bridge;

OR

- (ii) an independent hydraulic system for each door complying with the following provisions-
 - (ba) each power source shall consist of a motor and pump capable of opening and closing the door;
 - (bb) in addition, there shall be a hydraulic accumulator of sufficient capacity to operate the door at least three times, i.e. closed-open-closed, against an adverse list of 15° and this operating cycle shall be capable of being carried out when the accumulator is at the pump cut-in pressure;
 - (bc) the fluid used shall be chosen considering the temperatures liable to be encountered by the installation during its service;
 - (bd) a low gas pressure group alarm or other effective means of monitoring loss of stored energy in hydraulic accumulators shall be provided at the central operating console on the navigation bridge; and
 - (be) loss of stored energy indication at each local operating position shall also be provided;

OR

- (iii) an independent electrical system and motor for each door complying with the following provisions-
 - (ba) each power source shall consist of a motor capable of opening and closing the door;
 - (bb) the power source shall be capable of being automatically supplied by the transitional source of emergency electrical power as required by Regulation 42 of Chapter II-1 D of SOLAS, in accordance with Chapter 5 of this Code, in the event of failure of either the main or emergency source of electrical power and with sufficient capacity to operate the door at least three times, i.e. closed-open-closed, against an adverse list of 15°,
- (iv) For the systems specified in sections 4.15(7)(c)(i), 4.15(7)(c)(ii) and 4.15(7)(c)(iii), provision should be made as follows-
 - (ba) power systems for power-operated watertight sliding doors shall be separate from any other power system; and
 - (bb) a single failure in the electric or hydraulic power-operated systems excluding the hydraulic actuator shall not prevent the hand operation of any door.
- (d) control handles shall be provided at each side of the bulkhead at a minimum height of 1.6 metres above the floor and shall be so arranged as to enable persons passing through the doorway to hold both handles in the

- open position without being able to set the power closing mechanism in operation accidentally and the direction of movement of the handles in opening and closing the door shall be in the direction of door movement and shall be clearly indicated
- (e) as far as practicable, electrical equipment and components for watertight doors shall be situated above the bulkhead deck and outside hazardous areas and spaces.
 - (f) the enclosures of electrical components necessarily situated below the bulkhead deck shall provide suitable protection against the ingress of water¹⁸.
 - (g) electric power, control, indication and alarm circuits shall be protected against fault in such a way that a failure in one door circuit will not cause a failure in any other door circuit. Short circuits or other faults in the alarm or indicator circuits of a door shall not result in a loss of power operation of that door and arrangements shall be such that leakage of water into the electrical equipment located below the bulkhead deck will not cause the door to open.
 - (h) the power operating or control system of a power-operated sliding watertight door shall comply with the following provisions-
 - (i) a single electrical failure in the power operating or control system of a power-operated sliding watertight door shall not result in a closed door opening;
 - (ii) the availability of the power supply should be continuously monitored at a point in the electrical circuit as near as practicable to each of the motors required by section 4.15(7); and
 - (iii) the loss of any such power supply should activate an audible and visual alarm at the central operating console at the navigation bridge.
- (8) The central operating console at the navigation bridge shall comply with the following provisions-
- (a) it shall have a "master mode" switch with two modes of control as follows-
 - (i) a "local control" mode which shall allow any door to be locally opened and locally closed after use without automatic closure; and
 - (ii) a "doors closed" mode which shall automatically close any door that is open;

¹⁸ Refer to the following publication IEC 60529-(2003)-

- (a) electrical motors, associated circuits and control components; protected to IPX 7 standard;
- (b) door position indicators and associated circuit components; protected to IPX 8 standard; and
- (c) door movement warning signals; protected to IPX 6 standard.

Other arrangements for the enclosures of electrical components may be fitted provided the Administration is satisfied that an equivalent protection is achieved. The water pressure IPX 8 shall be based on the pressure that may occur at the location of the component during flooding for a period of 36 hours.

- (b) the "doors closed" mode shall automatically close any door that is open and permit doors to be opened locally and shall automatically re-close the doors upon release of the local control mechanism.
 - (c) the "master mode" switch shall normally be in the "local control" mode.
 - (d) the "doors closed" mode shall only be used in an emergency or for testing purposes; and
 - (e) special consideration shall be given to the reliability of the "master mode" switch.
 - (f) the console shall be-
 - (i) be provided with a diagram showing the location of each door, with visual indicators to show whether each door is open or closed;
 - (ii) be fitted with a red light indicating that a door is fully open and a green light indicating that door is fully closed and when a door is closed remotely the red indicating light shall indicate the intermediate position by flashing,
 - (g) the indicating circuit shall be independent of the control circuit for each door; and
 - (h) it shall not be possible to remotely open any door from the central operating console.
- (9) *If the Administration is satisfied that the fitting of watertight doors in watertight bulkheads dividing storage between deck spaces is essential then such doors, of satisfactory construction, may be fitted in accordance with the following provisions-*
- (a) such doors may be hinged, rolling or sliding doors but shall not be remotely controlled;
 - (b) they shall be fitted at the highest level and as far from the shell plating as practicable, but in no case shall the outboard vertical edges be situated at a distance from the shell plating which is less than one fifth of the breadth of the ship, as defined in section 1.3, such distance being measured at right angles to the centreline at the level of the deepest subdivision draught;
 - (c) should any such doors be accessible during the voyage, they shall be fitted with a device which prevents unauthorised opening; and
 - (d) when it is proposed to fit such doors, the number and arrangements shall receive the special consideration of the Administration.
- (10) Portable plates on bulkheads shall not be permitted except in machinery spaces and where they are permitted shall be subject to the following conditions-
- (a) the Administration may permit not more than one power-operated sliding watertight door in each watertight bulkhead larger than those specified in section 4.15(7)(a)(ii) to be substituted for these portable plates, provided these doors are intended to remain closed during navigation except in case of urgent necessity at the discretion of the master; and

- (b) such doors need not meet the requirements of section 4.15(7)(a)(iv) regarding complete closure by hand-operated gear in 90 seconds.
- (11) Where trunkways or tunnels for access from crew accommodation to other spaces, for piping, or for any other purpose are carried through watertight bulkheads, they shall be comply with the following provisions-
- (a) they shall watertight and in accordance with the requirements of section 4.18;
 - (b) the access to at least one end of each such tunnel or trunkway, if used as a passage at sea, shall be through a trunk extending watertight to a height sufficient to permit access above the bulkhead deck;
 - (c) the access to the other end of the trunkway or tunnel may be through a watertight door of the type required by its location in the ship;
 - (d) such trunkways or tunnels shall not extend through the first subdivision bulkhead abaft the collision bulkhead;
 - (e) where it is proposed to fit tunnels piercing watertight bulkheads, these shall receive the special consideration of the Administration; and
 - (f) where trunkways in connection with refrigerated spaces and ventilation or forced draught trunks are carried through more than one watertight bulkhead, the means of closure at such openings shall be operated by power and be capable of being closed from a central position situated above the bulkhead deck.

4.16 Openings in the Shell Plating below the Bulkhead Deck:

- (1) The number of openings in the shell plating shall be reduced to the minimum compatible with the design and proper working of the ship.
- (2) The arrangement and efficiency of the means for closing any opening in the shell plating shall be consistent with its intended purpose and the position in which it is fitted and generally to the satisfaction of the Administration.
- (3) Subject to the requirements of Chapter 2, no sidescuttle or window shall be fitted in such a position that its sill is below a line drawn parallel to the freeboard deck at side and having its lowest point 2.5% of the breadth of the ship above the deepest subdivision load line, or 500 millimetres, whichever is the greater.
- (4) *Notwithstanding the requirements of section 2.12 all sidescuttles the sills of which are below the bulkhead deck, as permitted by subsection (3) shall be such of construction, and subject to strict procedures, as will effectively prevent any person opening them without the sanction of the master.*
- (5) The number of scuppers, sanitary discharges and other similar openings in the shell plating shall be reduced to the minimum either by making each discharge serve for as many as possible of the sanitary and other pipes, or in any other satisfactory manner.

- (6) All inlets and discharges in the shell plating shall be fitted with efficient and accessible arrangements for preventing the accidental admission of water into the ship.
- (7) Subject to the requirements of the International Convention on Load Lines in force, and except as provided in subsection (9), each separate discharge led through the shell plating from spaces below the margin line shall comply with the following provisions-
 - (a) the discharge shall be provided with either one automatic non-return valve fitted with a positive means of closing it from above the bulkhead deck or with two automatic non-return valves without positive means of closing, provided that the inboard valve is situated above the deepest subdivision load line and is always accessible for examination under service conditions; and
 - (b) where a valve with positive means of closing is fitted, the operating position above the bulkhead deck shall always be readily accessible and means shall be provided for indicating whether the valve is open or closed.
- (8) The requirements of the International Convention on Load Lines shall apply to discharges led through the shell plating from spaces above the margin line.
- (9) *Machinery room main and auxiliary sea inlets and discharges in connection with the operation of machinery shall be fitted with readily accessible valves between the pipes and the shell plating or between the pipes and fabricated boxes attached to the shell plating and the valves shall be provided with indicators showing whether they are open or closed: the location of the controls of such valves shall be so sited as to allow adequate time for operation in case of influx of water to the space, having regard to the time likely to be required in order to reach and operate such controls. If the level to which the space could become flooded with the ship in the fully loaded condition so requires, arrangements shall be made to operate the controls from a position above such level: provided that in continuously Manned Machinery Spaces the valves may be controlled locally but they shall also be provided with indicators showing whether they are open or closed.*
- (10) All shell fittings, valves and pipes required by this Chapter comply with the following provisions-
 - (a) shell fittings and valves shall be of steel, bronze or other approved ductile material;
 - (b) valves of ordinary cast iron or similar material are not acceptable;
 - (c) pipes shall be of steel or other equivalent material to the satisfaction of the Administration.
- (11) *Ports fitted below the margin line shall be of sufficient strength and shall be effectively closed and secured watertight before the ship leaves port, and shall be kept closed during navigation.*
- (12) Such ports shall in no case be so fitted as to have their lowest point below the deepest subdivision load line.

- (13) *The inboard opening of each ash-chute, rubbish-chute, etc., shall be fitted with an efficient cover.*
- (14) If the inboard opening is situated below the margin line, the cover shall be watertight, and in addition an automatic non-return valve shall be fitted in the chute in an easily accessible position above the deepest subdivision load line and when the chute is not in use both the cover and the valve shall be kept closed and secured.
- (15) *In applying this section due regard shall also be had to section 2.13 of the Code.*

4.17 Construction and Initial Testing of Watertight Doors, Sidescuttles, etc.:

- (1) In all ships-
 - (a) the design, materials and construction of all watertight doors, sidescuttles, gangway and stores loading ports, valves, pipes, and rubbish-chutes referred to in these regulations shall be to the satisfaction of the Administration;
 - (b) such valves, doors and mechanisms shall be suitably marked to ensure that they may be properly used to provide maximum safety; and
 - (c) the frames of vertical watertight doors shall have no groove at the bottom in which dirt might lodge and prevent the door closing properly.
- (2) In all ships-
 - (a) watertight doors shall be tested by water pressure to a head of water they might sustain in a final or intermediate stage of flooding;
 - (b) where testing of individual doors is not carried out because of possible damage to insulation or outfitting items, testing of individual doors may be replaced by a prototype pressure test of each type and size of door with a test pressure corresponding at least to the head required for the intended location provided that-
 - (i) the prototype test shall be carried out before the door is fitted;
 - (ii) the installation method and procedure for fitting the door on board shall correspond to that of the prototype test; and
 - (iii) when fitted on board, each door shall be checked for proper seating between the bulkhead, the frame and the door.

4.18 Construction and Initial Testing of Watertight Decks, Trunks, etc.:

- (1) Watertight decks, trunks, tunnels, duct keels and ventilators shall-
 - (a) be of the same strength as watertight bulkheads at corresponding levels and the means used for making them watertight, and the arrangements adopted

- for closing openings in them, shall be to the satisfaction of the Administration;
- (b) watertight ventilators and trunks shall be carried at least up to the bulkhead deck;
- (2) where a ventilation trunk passing through a structure penetrates the bulkhead deck, the trunk shall be capable of withstanding the water pressure that may be present within the trunk, after having taken into account the maximum heel angle allowable during intermediate stages of flooding, in accordance with section 4.8.
- (3) after completion, a hose or flooding test shall be applied to watertight decks and a hose test to watertight trunks, tunnels and ventilators.

4.19 Internal Watertight Integrity above the Bulkhead Deck:

- (1) The Administration may require that all reasonable and practicable measures shall be taken to limit the entry and spread of water above the bulkhead deck in accordance with the following provisions-
- (a) such measures may include partial bulkheads or webs;
 - (b) when partial watertight bulkheads and webs are fitted on the bulkhead deck, above or in the immediate vicinity of watertight bulkheads, they shall have watertight shell and bulkhead deck connections so as to restrict the flow of water along the deck when the ship is in a heeled damaged condition;
 - (c) where the partial watertight bulkhead does not line up with the bulkhead below, the bulkhead deck between shall be made effectively watertight; and
 - (d) where openings, pipes, scuppers, electric cables etc. are carried through the partial watertight bulkheads or decks within the immersed part of the bulkhead deck, arrangements shall be made to ensure the watertight integrity of the structure above the bulkhead deck¹⁹.
- (2) All openings in the exposed weather deck shall have coamings of ample height and strength and shall be provided with efficient means for expeditiously closing them weathertight. Freeing ports, open rails and scuppers shall be fitted as necessary for rapidly clearing the weather deck of water under all weather conditions.
- (3) The open end of air pipes terminating within a superstructure shall-
- (a) be at least 1 metre above the waterline when the ship heels to an angle of 15°, or the maximum angle of heel during intermediate stages of flooding, as determined by direct calculation, whichever is the greater;
 - (b) alternatively, air pipes from tanks other than oil tanks may discharge through the side of the superstructure; and

¹⁹ Refer to the Guidance notes on the integrity of flooding boundaries above the bulkhead deck of passenger ships for proper application of regulations II-1/8 and 20, paragraph 1, of SOLAS 1974, as amended (MSC/Circ.541, as may be amended).

- (c) the provisions of this paragraph are without prejudice to the provisions of the International Convention on Load Lines in force.
- (4) Sidescuttles, gangway, stores loading and fuelling ports and other means for closing openings in the shell plating above the bulkhead deck shall be of efficient design and construction and of sufficient strength having regard to the spaces in which they are fitted and their positions relative to the deepest subdivision draught.
- (5) *In applying the provisions of this section due regard shall be had to section 2.12 of Chapter 2.*

PART IV

SUBDIVISION LOADLINE ASSIGNMENT

4.20 *Assigning, Marking and Recording of Subdivision Load Lines:*

- (1) In order that the required degree of subdivision shall be maintained a load line corresponding to the approved subdivision draught shall be assigned and marked on the ship's sides;
- (2) Subject to subsection (3), the subdivision load lines assigned and marked shall be recorded in the Passenger Ship Safety Certificate, and shall be distinguished by the notation P1 for the principal passenger service configuration, and P2, P3, etc., for the alternative configurations and the principal passenger configuration shall be taken as the mode of operation in which the required subdivision index R will have the highest value.
- (3) *Where assessed using the deterministic means in accordance with Part VI of this Chapter, the subdivision load lines assigned and marked shall be recorded in the Passenger Ship Safety Certificate and shall be distinguished by the notation C.1 for the principal passenger condition and C.2, C.3, etc., for the alternative conditions.*
- (4) The freeboard corresponding to each of these load lines shall be measured at the same position and from the same deck line as the freeboards determined in accordance with the International Convention on Load Lines in force. (See also section 2.3 and 2.4 of Chapter 2 of the Code.)
- (5) The freeboard corresponding to each approved subdivision load line and the service configuration, for which it is approved, shall be clearly indicated on the Passenger Ship Safety Certificate.
- (6) In no case shall any subdivision load line mark be placed above the deepest load line in salt water as determined by the strength of the ship or the International Convention on Load Lines in force.
- (7) Whatever may be the position of the subdivision load line marks, a ship shall in no case be loaded so as to submerge the load line mark appropriate to the season and locality as determined in accordance with the International Convention on Load Lines in force.
- (8) A ship shall in no case be so loaded that when it is in salt water the subdivision load line mark appropriate to the particular voyage and service configuration is submerged.

This page has been intentionally inserted to preserve correct pagination.

PART V

STABILITY MANAGEMENT

4.21 *Damage Control Information:*²⁰

- (1) There shall be permanently exhibited, or readily available on the navigation bridge, for the guidance of the officer in charge of the ship-
 - (a) plans showing clearly for each deck and storage space the boundaries of the watertight compartments, the openings therein with the means of closure and position of any controls thereof, and the arrangements for the correction of any list due to flooding;
 - (b) booklets containing the aforementioned information shall be made available to the officers of the ship.
- (2) Watertight doors in passenger ships permitted to remain open during navigation shall be clearly indicated in the ship's stability information.
- (3) General precautions to be included shall consist of a listing of equipment, conditions, and operational procedures, considered by the Administration to be necessary to maintain watertight integrity under normal ship operations.
- (4) Specific precautions to be included shall consist of a listing of elements (i.e. closures, security of stores, sounding of alarms, etc.) considered by the Administration to be vital to the survival of the ship, passengers and crew.
- (5) In case of ships to which damage stability requirements of Part II of this Chapter apply, damage stability information shall provide the master with a simple and easily understandable way of assessing the ship's survivability in all damage cases involving a compartment or group of compartments.

4.22 *Loading of Passenger Ships:*

- (1) On completion of loading of the ship-
 - (a) the master shall, prior to the ship's departure, determine the ship's trim and stability and also ascertain and record that the ship is in compliance with stability criteria in relevant regulations; and
 - (b) the determination of the ship's stability shall always be made by calculation provided that the Administration may accept the use of an electronic loading and stability computer or equivalent means for this purpose.

²⁰ Refer to the Guidelines for damage control plans contained in MSC.1/Circular.1245 - Guidelines for Damage Control Plans and Information to the Master (as may be amended from time to time)

- (2) Water ballast should not in general be carried in tanks intended for oil fuel provided that in ships in which it is not practicable to avoid putting water in oil fuel tanks, oily-water separating equipment to the satisfaction of the Administration shall be fitted, or other alternative means, such as discharge to shore facilities, acceptable to the Administration shall be provided for disposing of the oily-water ballast.
- (3) The provisions of this section are without prejudice to the provisions of the International Convention for the Prevention of Pollution from Ships in force.

4.23 Periodical Operation and Inspection of Watertight doors, etc.:

- (1) Drills for the operating of watertight doors, sidescuttles, valves and closing mechanisms of scuppers, ash-chutes and rubbish-chutes shall take place weekly. In ships in which the voyage exceeds one week in duration a complete drill shall be held before leaving port, and others thereafter at least once a week during the voyage.
- (2) All watertight doors, both hinged and power operated, in watertight bulkheads, in use at sea, shall be operated daily.
- (3) The watertight doors and all mechanisms and indicators connected therewith, all valves, the closing of which is necessary to make a compartment watertight, and all valves the operation of which is necessary for damage control cross connections shall be periodically inspected at sea at least once a week.
- (4) A record of all drills and inspections required by this regulation shall be entered in the log-book with an explicit record of any defects which may be disclosed.

4.24 Prevention and Control of Water Ingress, etc.:

- (1) All watertight doors shall be kept closed during navigation provided that-
 - (a) they may be opened during navigation as specified in subsections (3) and (4);
 - (b) watertight doors of a width of more than 1.2 metres in machinery spaces as permitted by section 4.15 (10) may only be opened in the circumstances detailed in that regulation; and
 - (c) any door which is opened in accordance with this paragraph shall be ready to be immediately closed.
- (2) Watertight doors located below the bulkhead deck having a maximum clear opening width of more than 1.2 metres shall be kept closed when the ship is at sea, except for limited periods when absolutely necessary as determined by the Administration.
- (3) A watertight door may be opened during navigation to permit the passage of passengers or crew, or when work in the immediate vicinity of the door

necessitates it being opened provided that the door must be immediately closed when transit through the door is complete or when the task which necessitated it being open is finished.

- (4) Certain watertight doors may be permitted to remain open during navigation under the following conditions-
 - (a) only if considered absolutely necessary; that is, being open is determined essential to the safe and effective operation of the ship's machinery or to permit passengers normally unrestricted access throughout the passenger area;
 - (b) such determination shall be made by the Administration only after careful consideration of the impact on ship operations and survivability; and
 - (c) a watertight door permitted to remain thus open shall be clearly indicated in the ship's stability information and shall always be ready to be immediately closed.
- (5) Portable plates on bulkheads and power-operated sliding doors permitted in machinery spaces in accordance with section 4.15(10) shall be subject to the following provisions-
 - (a) portable plates shall always be in place before the ship leaves port, and shall not be removed during navigation except in case of urgent necessity at the discretion of the master;
 - (b) the necessary precautions shall be taken in replacing portable plates to ensure that the joints are watertight; and
 - (c) power-operated sliding watertight doors permitted in machinery spaces shall be closed before the ship leaves port and shall remain closed during navigation except in case of urgent necessity at the discretion of the master.
- (6) Watertight doors fitted in watertight bulkheads dividing storage between deck spaces in accordance with section 4.15(9) shall be closed before the voyage commences and shall be kept closed during navigation; the time of opening such doors in port and of closing them before the ship leaves port shall be entered in the logbook.
- (7) Gangway, stores and fuelling ports fitted below the bulkhead deck shall be effectively closed and secured watertight before the ship leaves port, and shall be kept closed during navigation.
- (8) The following doors, located above the bulkhead deck, shall be closed and locked before the ship proceeds on any voyage and shall remain closed and locked until the ship is at its next berth-
 - (a) doors in the shell or the boundaries of enclosed superstructures;
 - (b) *garage doors fitted in positions as indicated in paragraph (a) above;*
 - (c) doors in the collision bulkhead; and

- (d) other shell openings forming an alternative closure to those defined in the above paragraphs (a) to (c) inclusive.
- (9) *Notwithstanding the requirements of paragraphs 8(a) and (d) above, the Administration may authorise that particular doors can be opened at the discretion of the master, if necessary for the operation of the ship or the embarking and disembarking of passengers and appropriate recreational activities when the ship is at safe anchorage and provided that the safety of the ship is not impaired.*
- (10) The master shall ensure that an effective system of supervision and reporting of the closing and opening of the doors referred to in subsection (8) is implemented.
- (11) The master shall ensure, before the ship proceeds on any voyage, that an entry in the log-book is made of the time of the last closing of the doors specified in subsection (13) and the time of any opening of particular doors in accordance with subsection (14).
- (12) Hinged doors, portable plates, sidescuttles, gangway, stores loading and bunkering ports and other openings, which are required by these regulations to be kept closed during navigation, shall be closed before the ship leaves port and the time of closing and the time of opening (if permissible under the Code regulations) shall be recorded in such log-book as may be prescribed by the Administration.
- (13) Where in a between-decks, the sills of any of the sidescuttles referred to in section 4.16(4) are below a line drawn parallel to the bulkhead deck at side and having its lowest point 1.4 metres plus 2.5% of the breadth of the ship above the water when the ship departs from any port-
- (a) all the sidescuttles in that between-decks shall be closed watertight and locked before the ship leaves port;
 - (b) they shall not be opened before the ship arrives at the next port;
 - (c) in the application of this paragraph the appropriate allowance for fresh water may be made when applicable;
 - (d) the time of opening such sidescuttles in port and of closing and locking them before the ship leaves port shall be entered in such log-book as may be prescribed by the Administration; and
 - (e) for any ship that has one or more sidescuttles so placed that the requirements of this subsection would apply when it was floating at its deepest subdivision draught, the Administration may indicate the limiting mean draught at which these sidescuttles will have their sills above the line drawn parallel to the bulkhead deck at side, and having its lowest point 1.4 m plus 2.5% of the breadth of the ship above the waterline corresponding to the limiting mean draft, and at which it will therefore be permissible to depart from port without previously closing and locking them and to open them at sea on the responsibility of the master during the voyage to the next port; in tropical zones as defined in the

International Convention on Load Lines in force, this limiting draught may be increased by 0.3 metres.

- (14) Sidescuttles and their deadlights which will not be accessible during navigation shall be closed and secured before the ship leaves port.
- (15) *If stores are carried in spaces fitted with sidescuttles then those sidescuttles and their deadlights shall be closed watertight and locked before the stores are shipped and such closing and locking shall be recorded in such log-book as may be prescribed by the Administration.*
- (16) When a rubbish-chute, etc., is not in use, both the cover and the valve required by section 4.16(10)(b) shall be kept closed and secured.

This page has been intentionally inserted to preserve correct pagination.

PART VI

ALTERNATIVE SUBDIVISION AND STABILITY STANDARDS FOR PASSENGER YACHTS NOT EXCEEDING 80 METRES IN LENGTH (L) WHERE COMPLIANCE WITH REGULATION 6 AND 7 OF SOLAS II-1 PART B-1 PROVES IMPRACTICABLE

In order to use this Part of the Code, compliance with regulation 6 and 7 of SOLAS II-1 Part B-1 should be confirmed to be impracticable for the vessel arrangement due to its size. This should be in the form of a statement from the Naval Architect following consideration that SOLAS II-1 PART B-1 was not developed for vessels of this size.

4.25 Floodable Length:

- (1) The floodable length at any point shall be determined by a method of calculation which takes into consideration the form, draught and other characteristics of the ship in question.*
- (2) In a ship with a continuous bulkhead deck, the floodable length at a given point is the maximum portion of the length of the ship, having its centre at the point in question, which can be flooded under the definite assumptions set forth in section 4.26 without the ship being submerged beyond the margin line.*
- (3) In the case of a ship not having a continuous bulkhead deck, the floodable length at any point may be determined to an assumed continuous margin line which at no point is less than 76 millimetres below the top of the deck (at side) to which the bulkheads concerned and the shell are carried watertight.*
- (4) Where a portion of an assumed margin line is appreciably below the deck to which bulkheads are carried, the Administration may permit a limited relaxation in the watertightness of those portions of the bulkheads which are above the margin line and immediately under the higher deck.*

4.26 Permeability:

- (1) The definite assumptions referred to in section 4.25 relate to the permeability of the spaces below the margin line.*
- (2) In determining the floodable length, a uniform average permeability shall be used throughout the whole length of each of the following portions of the ship below the margin line-*
 - (a) the machinery room;*
 - (b) the portion forward of the machinery room; and*
 - (c) the portion abaft the machinery room.*

- (3) *The uniform average permeability throughout the machinery room shall be determined from the formula-*

$$85 + 10 \frac{a - c}{v}$$

where-

a = the volume of the passenger spaces;

c = the volume of between-deck spaces below the margin line within the limits of the machinery room which are appropriated to stores; and

v = the whole volume of the machinery room below the margin line.

- (4) *Where it is shown to the satisfaction of the Administration that the average permeability as determined by detailed calculation is less than that given by the formula, the detailed calculated value may be used and for the purpose of such calculation, the permeability of passenger spaces shall be taken as 95, that of all store spaces as 60, and that of double bottom, oil fuel and other tanks at such value as may be approved in each case.*
- (5) *Except as provided in subsection (6), the uniform average permeability throughout the portion of the ship forward of or abaft the machinery room shall be determined from the formula-*

$$63 + 35 \frac{a}{v}$$

where-

a = the volume of the passenger spaces, as defined in which are situated below the margin line, forward of or abaft the machinery room; and

v = the whole volume of the portion of the ship below the margin line forward of or abaft the machinery room.

- (6) *In the case of unusual arrangements the Administration may allow, or require, a detailed calculation of average permeability for the portions forward of or abaft the machinery room and for the purpose of such calculation, the permeability of passenger spaces shall be taken as 95, that of spaces containing machinery as 85, that of all store spaces as 60, and that of double bottom, oil fuel and other tanks at such value as may be approved in each case.*
- (7) *Where a between-deck compartment between two watertight transverse bulkheads contains any passenger or crew space, the whole of that compartment, less any space completely enclosed within permanent steel bulkheads and appropriated to other purposes, shall be regarded as passenger space.*

4.27 Permissible Length of Compartments:

General

- (1) *Ships shall be as efficiently subdivided as is possible having regard to the nature of the service for which they are intended and the degree of subdivision shall vary with the length of the ship and with the service, in such manner that the highest*

degree of subdivision corresponds with the ships of greatest length, primarily engaged in the carriage of passengers.

Factor of subdivision

- (2) *The maximum permissible length of a compartment having its centre at any point in the ship's length is obtained from the floodable length by multiplying the latter by an appropriate factor called the factor of subdivision.*
- (3) *The factor of subdivision shall depend on the length of the ship, and for a given length shall vary according to the nature of the service for which the ship is intended and it shall decrease in a regular and continuous manner-*
- (a) *as the length of the ship increases, and*
- (b) *from a factor A, to a factor B.*
- (4) *The variations of the factors A and B shall be expressed by the following formulae (1) and (2) where L is the length of the ship as defined in section 1.3-*

$$A = \frac{58.2}{L-60} + 0.18 \quad (\text{Where } L = 131 \text{ metres and above}) \quad (1)$$

$$B = \frac{30.3}{L-42} + 0.18 \quad (\text{Where } L = 79 \text{ metres and above}) \quad (2)$$

Criterion of Service

- (5) *For a ship of given length the appropriate factor of subdivision shall be determined by the criterion of service numeral (hereinafter called the criterion numeral) as given by the following formulae (3) and (4) where-*

C_s = the criterion numeral;

L = the length of the ship (metres), as defined in section 1.3;

M = the volume of the machinery room (cubic metres), as defined in section 1.3, with the addition thereto of the volume of any permanent oil fuel bunkers which may be situated above the inner bottom and forward of or abaft the machinery room;

P = the whole volume of the passenger spaces below the margin line (cubic metres), as defined in section 1.3;

V = the whole volume of the ship below the margin line (cubic metres); and

$P_1 = KN$

where:

N = the number of passengers for which the ship is to be certified, and

$K = 0.056L$.

when P_1 is greater than P -

$$C_s = 72 \frac{M+2P_1}{V+P_1-P} \quad (3)$$

in other cases-

$$C_s = 72 \frac{M+2P}{V} \quad (4)$$

- (6) Where the value of KN is greater than the sum of P and the whole volume of the actual passenger spaces above the margin line, the figure to be taken as P_1 is that sum or two-thirds KN , whichever is the greater.
- (7) For ships not having a continuous bulkhead deck the volumes are to be taken up to the actual margin lines used in determining the floodable lengths'

Rules for Subdivision of Ships other than those covered by Subsection (14) (Special Subdivision Standards)

- (8) The subdivision abaft the forepeak of ships of 131 metres in length and upwards having a criterion numeral of 23 or less shall be governed by the factor A given by formula (1); of those having a criterion numeral of 123 or more by the factor B given by formula (2); and of those having a criterion numeral between 23 and 123 by the factor F obtained by linear interpolation between the factors A and B , using the formula-

$$F = A - \frac{(A-B)(C_s-23)}{100} \quad (5)$$

- (9) Nevertheless, where the criterion numeral is equal to 45 or more and simultaneously the computed factor of subdivision as given by formula (5) is 0.65 or less, but more than 0.5, the subdivision abaft the forepeak shall be governed by the factor 0.5.
- (10) Where the factor F is less than 0.4 and it is shown to the satisfaction of the Administration to be impracticable to comply with the factor F in a machinery compartment of the ship, the subdivision of such compartment may be governed by an increased factor, which, however, shall not exceed 0.4.
- (11) The subdivision abaft the forepeak of ships of less than 131 metres but not less than 79 metres in length having a criterion numeral equal to S , where-

$$S = \frac{3.574 - 25L}{13}$$

shall be governed by the factor unity; of those having a criterion numeral of 123 or more by the factor B given by the formula (2); of those having a criterion numeral between S and 123 by the factor F obtained by linear interpolation between unity and the factor B using the formula-

$$F = 1 - \frac{(1-B)(C_s-S)}{123-S} \quad (6)$$

- (12) The subdivision abaft the forepeak of ships of less than 131 metres but not less than 79 metres in length and having a criterion numeral less than S , and of ships of less than 79 metres in length shall be governed by the factor unity, unless, in either case, it is shown to the satisfaction of the Administration to be impracticable to comply with this factor in any part of the ship, in which case the Administration may allow such relaxation as may appear to be justified, having regard to all the circumstances.

- (13) *The provisions of subsection (12) shall apply also to ships of whatever length, which are certified to carry a number of passengers exceeding 12 but not exceeding:*

$$\frac{L^2}{650} \text{ or } 36, \text{ whichever is less.}$$

Special Subdivision Standards for Ships complying with Section 7.21(2)

- (14) *In the case of ships complying with section 7.21(2) the subdivision abaft the forepeak shall be governed by a factor of 0.5 or by the factor determined according to paragraphs 5 to 13, if less than 0.5.*
- (15) *In the case of such ships of less than 91.5 metres in length, if the Administration is satisfied that compliance with such factor would be impracticable in a compartment, it may allow the length of that compartment to be governed by a higher factor provided the factor used is the lowest that is practicable and reasonable in the circumstances.*
- (16) *The special provisions regarding permeability given in section 4.26(2) shall be employed when calculating the floodable length curves.*
- (17) *Where the Administration is satisfied that, having regard to the nature and conditions of the intended voyages, compliance with the other provisions of this Chapter and Chapters 6 and 7 is sufficient, the requirements of section 4.27(16) need not be complied with.*

4.28 Special Requirements concerning Subdivision:

- (1) *Where in a portion or portions of a ship the watertight bulkheads are carried to a higher deck than in the remainder of the ship and it is desired to take advantage of this higher extension of the bulkheads in calculating the floodable length, separate margin lines may be used for each such portion of the ship provided that-*
- (a) *the sides of the ship are extended throughout the ship's length to the deck corresponding to the upper margin line and all openings in the shell plating below this deck throughout the length of the ship are treated as being below a margin line, for the purposes of paragraph; and*
 - (b) *the two compartments adjacent to the "step" in the bulkhead deck are each within the permissible length corresponding to their respective margin lines, and, in addition, their combined length does not exceed twice the permissible length based on the lower margin line.*
- (2) *A compartment may exceed the permissible length determined in accordance with section 4.27 provided the combined length of each pair of adjacent compartments to which the compartment in question is common does not exceed either the floodable length or twice the permissible length, whichever is the less.*

- (3) *If one of the two adjacent compartments is situated inside the machinery room, and the second is situated outside the machinery room, and the average permeability of the portion of the ship in which the second is situated differs from that of the machinery room, the combined length of the two compartments shall be adjusted to the mean average permeability of the two portions of the ship in which the compartments are situated.*
- (4) *Where the two adjacent compartments have different factors of subdivision, the combined length of the two compartments shall be determined proportionately.*
- (5) *In ships of 100 metres in length and upwards, one of the main transverse bulkheads abaft the forepeak shall be fitted at a distance from the forward perpendicular which is not greater than the permissible length.*
- (6) *A main transverse bulkhead may be recessed provided that all parts of the recess lie inboard of vertical surfaces on both sides of the ship, situated at a distance from the shell plating equal to one fifth the breadth of the ship, as defined in section 1.3, and measured at right angles to the centreline at the level of the deepest subdivision load line. Any part of a recess which lies outside these limits shall be dealt with as a step in accordance with subsection (7).*
- (7) *A main transverse bulkhead may be stepped provided that it meets one of the following conditions-*
 - (a) *the combined length of the two compartments, separated by the bulkhead in question, does not exceed either 90% of the floodable length or twice the permissible length, except that, in ships having a factor of subdivision greater than 0.9, the combined length of the two compartments in question shall not exceed the permissible length;*
 - (b) *additional subdivision is provided in way of the step to maintain the same measure of safety as that secured by a plane bulkhead; and*
 - (c) *the compartment over which the step extends does not exceed the permissible length corresponding to a margin line taken 76 millimetres below the step.*
- (8) *Where a main transverse bulkhead is recessed or stepped, an equivalent plane bulkhead shall be used in determining the subdivision.*
- (9) *If the distance between two adjacent main transverse bulkheads, or their equivalent plane bulkheads, or the distance between the transverse planes passing through the nearest stepped portions of the bulkheads, is less than 3 metres plus 3% of the length of the ship, or 11 metres, whichever is the less, only one of these bulkheads shall be regarded as forming part of the subdivision of the ship in accordance with the provisions of section 4.27.*
- (10) *Where a main transverse watertight compartment contains local subdivision and it can be shown to the satisfaction of the Administration that, after any assumed side damage extending over a length of 3 metres plus 3% of the length of the ship, or 11 metres, whichever is the less, the whole volume of the main compartment will not*

be flooded, a proportionate allowance may be made in the permissible length otherwise required for such compartment and in such a case the volume of effective buoyancy assumed on the undamaged side shall not be greater than that assumed on the damaged side.

- (11) *Where the required factor of subdivision is 0.5 or less, the combined length of any two adjacent compartments shall not exceed the floodable length.*

4.29 Stability in Damaged Condition:

- (1) *Sufficient intact stability shall be provided in all service conditions so as to enable the ship to withstand the final stage of flooding of any one main compartment which is required to be within the floodable length.*
- (2) *Where two adjacent main compartments are separated by a bulkhead which is stepped under the conditions of section 4.28(7)(b) the intact stability shall be adequate to withstand the flooding of those two adjacent main compartments.*
- (3) *Where the required factor of subdivision is 0.5 or less but more than 0.33 intact stability shall be adequate to withstand the flooding of any two adjacent main compartments.*
- (4) *Where the required factor of subdivision is 0.33 or less the intact stability shall be adequate to withstand the flooding of any three adjacent main compartments.*
- (5) *The requirements of subsections (1) to 4) shall be determined by calculations which are in accordance with subsections (11), (12) and (14) respectively and which take into consideration the proportions and design characteristics of the ship and the arrangement and configuration of the damaged compartments and in making these calculations the ship is to be assumed in the worst anticipated service condition as regards stability.*
- (6) *Where it is proposed to fit decks, inner skins or longitudinal bulkheads of sufficient tightness to seriously restrict the flow of water, the Administration shall be satisfied that proper consideration is given to such restrictions in the calculations.*
- (7) *The stability required in the final condition after damage, and after equalization where provided, shall be such that the positive residual righting lever curve shall have a minimum range of 15° beyond the angle of equilibrium provided that this range may be reduced to a minimum of 10°, in the case where the area under the righting lever curve is that specified in subsection (8), increased by the ratio-*

$$15/\text{range}$$

where the range is expressed in degrees.

- (8) *The area under the righting lever curve shall be at least 0.015 metre-radians, measured from the angle of equilibrium to the lesser of-*
- (a) *the angle at which progressive flooding occurs; or*

- (b) 22° (measured from the upright) in the case of one-compartment flooding, or 27° (measured from the upright) in the case of the simultaneous flooding of two or more adjacent compartments.
- (9) A residual righting lever is to be obtained within the range of positive stability, taking into account the greatest of the following heeling moments-
- (a) the crowding of all passengers towards one side;
 - (b) the launching of all fully loaded davit-launched survival craft on one side; and
 - (c) due to wind pressure,
- as calculated by the formula-
- $$GZ \text{ (in metres)} = (\text{Heeling moment/Displacement}) + 0.04,$$
- provided that in no case is the righting lever to be less than 0.1 metres.
- (10) For the purpose of calculating the heeling moments in subsection (9), the following assumptions shall be made-
- (a) moments due to crowding of passengers allowing-
 - (i) four persons per square metre;
 - (ii) a mass of 75 kg for each passenger,

and passengers shall be distributed on available deck areas towards one side of the ship on the decks where muster stations are located and in such a way that they produce the most adverse heeling moment;
 - (b) moments due to launching of all fully loaded davit-launched survival craft on one side under the following conditions;
 - (i) all lifeboats and rescue boats fitted on the side to which the ship has heeled after having sustained damage shall be assumed to be swung out fully loaded and ready for lowering;
 - (ii) for lifeboats which are arranged to be launched fully loaded from the stowed position, the maximum heeling moment during launching shall be taken;
 - (iii) a fully loaded davit-launched liferaft attached to each davit on the side to which the ship has heeled after having sustained damage shall be assumed to be swung out ready for lowering;
 - (iv) persons not in the life-saving appliances which are swung out shall not provide either additional heeling or righting moment; and
 - (v) life-saving appliances on the side of the ship opposite to the side to which the ship has heeled shall be assumed to be in a stowed position;
 - (c) moments due to wind pressure where-
 - (i) a wind pressure of 120 N/m² to be applied;

- (ii) *the area applicable shall be the projected lateral area of the ship above the waterline corresponding to the intact condition; and*
 - (iii) *the moment arm shall be the vertical distance from a point at one half of the mean draught corresponding to the intact condition to the centre of gravity of the lateral area;*
 - (d) *in intermediate stages of flooding, the maximum righting lever shall be at least 0.05 metres and the range of positive righting levers shall be at least 7° provided that in all cases, only one breach in the hull and only one free surface need be assumed.*
- (11) *For the purpose of making damage stability calculations the volume and surface permeabilities shall be in general as follows-*

Spaces	Permeability
<i>Appropriated to stores</i>	60
<i>Occupied by accommodation</i>	95
<i>Occupied by machinery</i>	85
<i>Intended for liquids</i>	<i>0 or 95 (whichever results in the more severe requirements)</i>

provided that higher surface permeabilities are to be assumed in respect of spaces which, in the vicinity of the damage waterplane, contain no substantial quantity of accommodation or machinery and spaces which are not generally occupied by any substantial quantity of stores.

- (12) *The assumed extent of damage shall be as follows-*
- (a) *in the longitudinal extent, 3 metres plus 3% of the length (L) of the ship, or 11 metres, whichever is the less, provided that where the required factor of subdivision is 0.33 or less the assumed longitudinal extent of damage shall be increased as necessary so as to include any two consecutive main transverse watertight bulkheads;*
 - (b) *in the transverse extent (measured inboard from the ship's side, at right angles to the centreline at the level of the deepest subdivision load line) a distance of one fifth of the breadth of the ship, as defined in section 1.3; and*
 - (c) *in the vertical extent: from the base line upwards without limit;*
- provided that if any damage of lesser extent than that indicated in this paragraph would result in a more severe condition regarding heel or loss of metacentric height, such damage shall be assumed in the calculations.*
- (13) *The following provisions apply with respect to unsymmetrical flooding-*
- (a) *Such flooding is to be kept to a minimum consistent with efficient arrangements;*
 - (b) *where it is necessary to correct large angles of heel, the means adopted shall, where practicable, be self-acting, but in any case where controls to*

- cross-flooding fittings are provided they shall be operable from above the bulkhead deck;*
- (c) the cross-flooding fittings, together with their controls, shall be acceptable to the Administration;*
 - (d) the maximum angle of heel after flooding but before equalisation shall not exceed 15°;*
 - (e) where cross-flooding fittings are required the time for equalisation shall not exceed 15 minutes; and*
 - (f) suitable information concerning the use of cross-flooding fittings shall be supplied to the master of the ship²¹.*
- (14) The final conditions of the ship after damage and, in the case of unsymmetrical flooding, after equalization measures have been taken shall be as follows-*
- (a) in the case of symmetrical flooding there shall be a positive residual metacentric height of at least 50 millimetres as calculated by the constant displacement method;*
 - (b) in the case of unsymmetrical flooding, the angle of heel for one-compartment flooding shall not exceed 7° and for the simultaneous flooding of two or more adjacent compartments, a heel of 12° may be permitted by the Administration; and*
 - (c) in no case shall the margin line be submerged in the final stage of flooding and if it is considered that the margin line may become submerged during an intermediate stage of flooding, the Administration may require such investigations and arrangements as it considers necessary for the safety of the ship.*
- (15) The master of the ship shall be supplied with the data necessary to maintain sufficient intact stability under service conditions to enable the ship to withstand the critical damage and in the case of ships requiring cross-flooding the master of the ship shall be informed of the conditions of stability on which the calculations of heel are based and be warned that excessive heeling might result should the ship sustain damage when in a less favourable condition.*
- (16) The data referred to in subsection (15) to enable the master to maintain sufficient intact stability shall include information which indicates the maximum permissible height of the ship's centre of gravity above keel (KG), or alternatively the minimum permissible metacentric height (GM), for a range of draughts or displacements sufficient to include all service conditions and the information shall show the influence of various trims taking into account the operational limits*
- (17) Datum draught marks should be provided at the bow and stern, port and starboard, in accordance with the following provisions-*
- (a) they shall be adequate for assessing the condition and trim of the vessel;*
 - (b) the draught marks may be single datum lines;*

²¹ Refer to the Recommendation on a standard method for establishing compliance with the requirements for cross-flooding arrangements in passenger ships adopted by the IMO by resolution A.266(VIII).

- (c) *the marks should be permanent and easily read but need not be of contrasting colour to the hull;*
 - (d) *the marks need not indicate more than one draught at each position and should be above, but within 1000 millimetres, of the deepest load waterline; and*
 - (e) *in the case where the draught marks are not located where they are easily readable or operational constraints for a particular trade make it difficult to read the draft marks,, then the ship shall also be fitted with a reliable draught indicating system by which the bow and stern draughts can be determined.*
- (18) *The draught to which marks relate should be indicated either above the mark on the hull and/or in the stability information booklet for the vessel and the position of the marks should be verified at initial placement by the Administration or the vessel's Assigning Authority.*
- (19) *Where a reliable draught indicating system is fitted as required by subsection (17) consideration will be given to dispensing with the provision of draught marks.*
- (20) *On completion of loading of the ship and prior to its departure, the master shall determine the ship's trim and stability and also ascertain and record that the ship is in compliance with the approved stability criteria and the determination of the ship's stability shall always be made by calculation, provided that the Administration may accept the use of an electronic loading and stability computer or equivalent means for this purpose.*
- (21) *No relaxation from the requirements for damage stability may be considered by the Administration unless it is shown that the intact metacentric height in any service condition necessary to meet these requirements is excessive for the service intended.*
- (22) *Relaxations from the requirements for damage stability shall be permitted only in exceptional cases and subject to the condition that the Administration is to be satisfied that the proportions, arrangements and other characteristics of the ship are the most favourable to stability after damage which can practically and reasonably be adopted in the particular circumstances.*

This page has been intentionally inserted to preserve correct pagination.

PART VII

ADDITIONAL PROVISIONS FOR VESSELS PERMITTED TO CARRY DAVIT LAUNCHED LIFERAFTS AND MARINE EVACUATION SYSTEMS IN LIEU OF LIFEBOATS

4.30 *Enhanced Survivability for Vessels provided with Davit Launched Liferafts or Davit Launched Liferafts and Marine Evacuation Systems in lieu of Lifeboats in accordance with Annex 3:*

- (1) *In addition to meeting the requirements of SOLAS II-1 Part B-1 Regulation 6 and 7 and the requirements of Part II or of Part VI of this Chapter, as appropriate, the following additional requirements should be met in all loading conditions following the flooding of any two adjacent compartments-*
- (a) *Except where paragraph 4.30(1)(b) applies, in the final stage of flooding and also after equalisation measures, if any, have been taken shall be as follows-*
 - (i) *the residual stability should be such that any angle of equilibrium does not exceed 7° from the upright, the resulting righting lever (GZ) curve has a range to down-flooding of at least 7° beyond any angle of equilibrium; and*
 - (ii) *the residual stability should be such that the vessel has a positive GZ of not less than 0.05 metres and a GM of not less than 0.05 metres; and*
 - (iii) *the margin line should not be immersed in the final stage of flooding except where (b) is complied with,*
 - (b) *the Administration may permit the margin line to be immersed in the final stage of flooding provided that the following conditions are satisfied-*
 - (i) *with the exception of subparagraph 4.30(1)(a)(iii), all other provisions of this section are complied with in full;*
 - (ii) *no progressive flooding can occur;*
 - (iii) *no escape routes, muster stations or survival craft locations are immersed;*
 - (iv) *all essential services, such as survival craft launching appliances, emergency generators, bilge systems, fire fighting systems and communications are available at all stages of flooding; and*
 - (v) *no controls intended for the operation of watertight doors, equalisation devices, or valves on piping or on ventilation ducts intended to maintain the integrity of watertight bulkheads from above the bulkhead deck, become inaccessible or inoperable,*

- (c) *in intermediate stages of flooding the angle of heel should not exceed 20° and the maximum GZ shall be at least 0.03 metres and the range of positive righting levers shall be at least 5° and progressive flooding is not to take place within this positive range; and*
 - (d) *for the purposes of this section damage should be assumed to occur anywhere in the length of the vessel.*
- (2) *The assumed extent of damage shall be as follows-*
- (a) *in the longitudinal extent, 3 metres plus 3% of the length (L) of the ship but need not exceed 10% of length, or 11 metres, whichever is the less, provided that where the required factor of subdivision is 0.33 or less the assumed longitudinal extent of damage shall be increased as necessary so as to include any two consecutive main transverse watertight bulkheads;*
 - (b) *in the transverse extent (measured inboard from the ship's side, at right angles to the centreline at the level of the deepest subdivision load line) a distance of one fifth of the breadth of the ship, as defined in section 1.3; and*
 - (c) *in the vertical extent: from the base line upwards without limit,*
provided that if any damage of lesser extent than that indicated in this paragraph would result in a more severe condition regarding heel or loss of metacentric height, such damage shall be assumed in the calculations.

4.31 Maximum Floodable Length for vessels of 80 metres in length and over

Vessels to which this section applies, over 80 metres in length, and assessed in accordance SOLAS II-1 Part B-1 Regulation 6 and 7, shall additionally meet the requirements for floodable length as defined in Section 4.25 of the Code.

CHAPTER 5

MACHINERY AND ELECTRICAL INSTALLATIONS AND UNATTENDED MACHINERY SPACES

5.1 *Machinery Installations:*

- (1) Every ship to which this Code applies shall also comply with the applicable requirements of Chapter II-1, Part C of the International Convention for the Safety of Life at Sea, 1974, as amended, with respect to machinery installations.
- (2) Where gas turbines are to be fitted, attention should be paid to the guidance contained within the IMO High-speed Craft Code, and installation is to be to the satisfaction of the Administration.

5.2 *Electrical Installations:*

Every ship to which this Code applies shall also comply with the applicable requirements of Chapter II-1, Part D of the International Convention for the Safety of Life at Sea, 1974, as amended, with respect to electrical installations.

5.3 *Periodically Unattended Machinery Spaces:*

- (1) *Whilst nothing in this Code precludes ships to which the Code applies from being optionally compliant with the requirements for periodically Unmanned Machinery Spaces (UMS), such a ship shall not operate in this mode whilst in service as a Code vessel, provided that when on transitional voyages without passengers such ships may operate in the UMS mode subject to the approval of the Administration.*
- (2) Every ship to which this Code applies and which complies with the periodically unattended machinery space standards in accordance with subsection (1) also comply with the applicable requirements of Chapter II-1, Part E of SOLAS, with respect to electrical installations.

This page is intentionally added to achieve correct pagination.

CHAPTER 6

FIRE PROTECTION, DETECTION AND EXTINCTION

6.1 *Fire Safety Objectives and Functional Requirements:*

Fire Safety Objectives

- (1) The fire safety objectives of this Chapter are to-
 - (a) prevent the occurrence of fire and explosion;
 - (b) reduce the risk to life caused by fire;
 - (c) reduce the risk of damage caused by fire to the ship and the environment;
 - (d) contain, control and suppress fire and explosion in the compartment of origin; and
 - (e) provide adequate and readily accessible means of escape for passengers and crew.

Functional Requirements

- (2) In order to achieve the fire safety objectives set out in subsection (1), the following functional requirements are embodied in the paragraphs of this Chapter as appropriate-
 - (a) division of the ship into main vertical and horizontal zones by thermal and structural boundaries;
 - (b) separation of accommodation spaces from the remainder of the ship by thermal and structural boundaries;
 - (c) restricted use of combustible materials;
 - (d) detection of any fire in the zone of origin;
 - (e) containment and extinction of any fire in the space of origin;
 - (f) protection of means of escape and access for fire fighting; and
 - (g) ready availability of fire-extinguishing appliances.

Achievement of the Fire Safety Objectives

- (3) The fire safety objectives set out in subsection (1) shall be achieved by ensuring compliance with the prescriptive requirements specified in this Chapter, or by alternative design and arrangements which comply with section 6.15 and a ship shall be considered to meet the functional requirements set out in subsection (2) and to achieve the fire safety objectives set out in subsection (1) when either-
 - (a) the ship's design and arrangements, as a whole, comply with the relevant prescriptive requirements in this Chapter;

- (b) the ship's design and arrangements, as a whole, have been reviewed and approved in accordance with section 6.15; or
- (c) part(s) of the ship's design and arrangements have been reviewed and approved in accordance with section 6.15 and the remaining parts of the ship comply with the relevant prescriptive requirements in this Chapter.

6.2 *Probability of Ignition:*

Purpose

- (1) The purpose of this paragraph is to prevent the ignition of combustible materials or flammable liquids. For this purpose, the following functional requirements shall be met-
 - (a) means shall be provided to control leaks of flammable liquids;
 - (b) means shall be provided to limit the accumulation of flammable vapours;
 - (c) the ignitability of combustible materials shall be restricted;
 - (d) ignition sources shall be restricted; and
 - (e) ignition sources shall be separated from combustible materials and flammable liquids.

Arrangements for Oil Fuel, Lubrication Oil, other Flammable Oils and Gaseous Fuels

- (2) The following limitations shall apply to the use of oil as fuel-
 - (a) except as otherwise permitted by this paragraph, no oil fuel with a flashpoint of less than 60°C shall be used;
 - (b) in emergency generators, oil fuel with a flashpoint of not less than 43°C may be used;
 - (c) the use of oil fuel having a flashpoint of less than 60°C but not less than 43°C may be permitted (e.g. for feeding the emergency fire pump's engines and the auxiliary machines which are not located in the machinery spaces of category A subject to the following-
 - (i) fuel oil tanks except those arranged in double bottom compartments shall be located outside of machinery spaces of category A;
 - (ii) provisions for the measurement of oil temperature are provided on the suction pipe of the oil fuel pump;
 - (iii) stop valves and/or cocks are provided on the inlet side and outlet side of the oil fuel strainers; and
 - (iv) pipe joints of welded construction or of circular cone type or spherical type union joint are applied as much as possible.
- (3) In a ship in which oil fuel is used, the arrangements for the storage, distribution and utilization of the oil fuel shall be such as to ensure the safety of the ship and persons on board and shall at least comply with subsections (4) through (22) inclusive.

- (4) As far as practicable, parts of the oil fuel system containing heated oil under pressure exceeding 0.18 N/mm^2 shall not be placed in a concealed position such that defects and leakage cannot readily be observed and the machinery spaces in way of such parts of the oil fuel system shall be adequately illuminated.
- (5) The ventilation of machinery spaces shall be sufficient under normal conditions to prevent accumulation of oil vapour.
- (6) Fuel oil, lubrication oil and other flammable oils shall not be carried in forepeak tanks.
- (7) The following provisions shall apply to the structure and location of oil fuel tanks-
 - (a) as far as practicable, oil fuel tanks shall be part of the ship's structure and shall be located outside machinery spaces of category A;
 - (b) where oil fuel tanks, other than double bottom tanks, are necessarily located adjacent to or within machinery spaces of category A, at least one of their vertical sides shall be contiguous to the machinery space boundaries, and shall preferably have a common boundary with the double bottom tanks, and the area of the tank boundary common with the machinery spaces shall be kept to a minimum; and
 - (c) where tanks are situated within the boundaries of machinery spaces of category A they shall not contain oil fuel having a flashpoint of less than 60°C . The use of free-standing oil fuel tanks shall be prohibited in category A machinery spaces.
- (8) No oil fuel tank shall be situated where spillage or leakage therefrom can constitute a fire or explosion hazard by falling on heated surfaces.
- (9) Oil fuel pipes, which, if damaged, would allow oil to escape from a storage, settling or daily service tank having a capacity of 500 litres and above situated above the double bottom, shall be provided with a remote means of closing as follows-
 - (a) subject to paragraph (b) the tank shall be fitted with a cock or valve directly on the tank capable of being closed from a safe position outside the space concerned in the event of a fire occurring in the space in which such tanks are situated;
 - (b) in the special case of deep tanks situated in any shaft or pipe tunnel or similar space, whilst valves on the tank shall be fitted, control in the event of fire may be effected by means of an additional valve on the pipe or pipes outside the tunnel or similar space, provided that if such an additional valve is fitted in the machinery space, it shall be operated from a position outside that space;
 - (c) the controls for remote operation of the valve for the emergency generator fuel tank shall be in a separate location from the controls for remote operation of other valves for tanks located in machinery spaces.

- (10) Safe and efficient means of ascertaining the amount of oil fuel contained in any oil fuel tank shall be provided.
- (11) Where sounding pipes are used-
- (a) they shall not terminate in any space where the risk of ignition of spillage from the sounding pipe might arise and in particular, they shall not terminate in passenger or crew spaces; and
 - (b) as a general rule they shall not terminate in machinery spaces provided that where the Administration considers that this requirement is impracticable, it may permit termination of sounding pipes in machinery spaces on condition that all of the following requirements are met-
 - (i) an oil-level gauge is provided meeting the requirements of subsection (12);
 - (ii) the sounding pipes terminate in locations remote from ignition hazards unless precautions are taken, such as the fitting of effective screens, to prevent the oil fuel in the case of spillage through the terminations of the sounding pipes from coming into contact with a source of ignition;
 - (iii) the terminations of the sounding pipes are fitted with self-closing blanking devices and with a small-diameter self-closing control cock located below the blanking device for the purpose of ascertaining, before the blanking device is opened, that oil fuel is not present; and
 - (iv) provisions are made so as to ensure that any spillage of oil fuel through the control cock involves no ignition hazard.
- (12) Other oil-level gauges may be used in place of sounding pipes provided such gauges shall not require penetration below the top of the tank and their failure or overfilling of the tanks shall not permit release of fuel.
- (13) The means prescribed in subsection (12) which are acceptable to the Administration shall be maintained in the proper condition to ensure their continued accurate functioning in service.
- (14) Provisions shall be made to-
- (a) prevent overpressure in any oil tank or in any part of the oil fuel system, including the filling pipes served by pumps on board; and
 - (b) to ensure that air and overflow pipes and relief valves shall discharge to a position where there is no risk of fire or explosion from the emergence of oils and vapour and such pipes shall not lead into crew, machinery, passenger or similar spaces.
- (15) Oil fuel pipes and their valves and fittings shall conform to the following requirements-

- (a) they shall be of steel or other approved material provided that, subject to paragraph (b), restricted use of flexible pipes shall be permissible in positions where the Administration is satisfied that they are necessary;
 - (b) flexible pipes permitted under paragraph (a), and their end attachments, shall be of approved fire-resisting materials of adequate strength and shall be constructed to the satisfaction of the Administration; and
 - (c) where valves fitted to oil fuel tanks are subject to static pressure, steel or spheroidal-graphite cast iron may be accepted provided that ordinary cast iron valves may be used in piping systems where the design pressure is lower than 7 bar and the design temperature is below 60°C.
- (16) External high-pressure fuel delivery lines between the high-pressure fuel pumps and fuel injectors shall be protected with a jacketed piping system which-
- (a) shall incorporate an outer pipe into which the high-pressure fuel pipe is placed, forming a permanent assembly;
 - (b) shall be capable of containing fuel from a high-pressure line failure; and
 - (c) shall include a means for collection of leakages and be provided with an alarm in case of a fuel line failure.
- (17) Oil fuel lines shall-
- (a) not be located immediately above or near units of high temperature, including boilers, steam pipelines, exhaust manifolds, silencers or other equipment required to be protected by subsections (21) and (22);
 - (b) as far as practicable, be arranged so as to be far apart from hot surfaces, electrical installations or other sources of ignition;
 - (c) be screened or otherwise suitably protected to avoid oil spray or oil leakage onto the sources of ignition; and
 - (d) be arranged such that the number of joints in such piping systems shall be kept to a minimum.
- (18) Components of a diesel engine fuel system shall be designed considering the maximum peak pressure which will be experienced in service, including any high-pressure pulses which are generated and transmitted back into the fuel supply and spill lines by the action of fuel injection pumps and connections within the fuel supply and spill lines shall be constructed having regard to their ability to prevent pressurized oil fuel leaks while in service and after maintenance.
- (19) In multi-engine installations which are supplied from the same fuel source, means of isolating the fuel supply and spill piping to individual engines shall be provided and such means of isolation shall not affect the operation of the other engines and shall be operable from a position not rendered inaccessible by a fire on any of the engines.
- (20) Where the Administration may permit the conveying of oil and combustible liquids through accommodation and service spaces, the pipes conveying oil or combustible liquids shall be of a material approved by the Administration having regard to the fire risk.

- (21) Surfaces with temperatures above 220°C which may be impinged as a result of a fuel system failure shall be properly insulated.
- (22) Precautions shall be taken to prevent any oil that may escape under pressure from any pump, filter or heater from coming into contact with heated surfaces.
- (23) The arrangements for the storage, distribution and utilisation of oil used in pressure lubrication systems shall be such as to ensure the safety of the ship and persons on board and the arrangements made in machinery spaces of category A, and whenever practicable in other machinery spaces, shall at least comply with the provisions of subsections (7) to 10, (14), (15), (17), (21) and (22), provided that-
- (a) this does not preclude the use of sight-flow glasses in lubricating systems provided that they are shown by testing to have a suitable degree of fire resistance; and
 - (b) sounding pipes may be authorised in machinery spaces and the requirements of subsections (11)(b)(i) and (11)(b)(iii) need not be applied provided that that the sounding pipes are fitted with appropriate means of closure.
- (24) The provisions of subsection (9) shall also apply to lubricating oil tanks having a capacity of 500 litres or more, storage tanks on which valves are closed during the normal operation mode of the ship, or where it is determined that an unintended operation of a quick-closing valve on the oil lubricating tank would endanger the safe operation of the main propulsion and essential auxiliary machinery.
- (25) The arrangements for the storage, distribution and utilisation of other flammable oils employed under pressure in power transmission systems, control and activating systems and heating systems shall-
- (a) be such as to ensure the safety of the ship and persons on board;
 - (b) shall be fitted with suitable oil collecting arrangements for leaks below hydraulic valves and cylinders;
 - (c) where means of ignition are present, at least comply with the provisions of subsections (8), (10), (13), (21), and (22), and with the provisions of subsections (14) and (15) in respect of strength and construction.
- (26) *The arrangements for the storage, distribution and utilisation of fuels having a flashpoint of less than 60°C for use in vehicles and pleasure craft shall be such as to ensure the safety of the ship and persons on board and such arrangements shall at least comply with the provisions of section 6.16(10) and section 8 of Annex 2 (Technical Standards for Helicopter Landing Areas and Helicopter Operating Standards).*
- (27) In addition to the requirements of subsections (2) to (4), the oil fuel and lubricating oil systems in a periodically unattended machinery space shall comply with the following-

- (a) where daily service oil fuel tanks are filled automatically, or by remote control, means shall be provided to prevent overflow spillages. Other equipment which treats flammable liquids automatically (e.g., oil fuel purifiers) which, whenever practicable, shall be installed in a special space reserved for purifiers and their heaters, shall have arrangements to prevent overflow spillages; and
 - (b) where daily service oil fuel tanks or settling tanks are fitted with heating arrangements, a high temperature alarm shall be provided if the flashpoint of the oil fuel can be exceeded.
- (28) *Where gaseous fuel is used for domestic purposes, the arrangements for the storage, distribution and utilisation of the fuel are to be such that, having regard to the hazards of fire and explosion which the use of the fuel may entail, the safety of the ship and the persons on board is preserved and the installation is to be in accordance with recognised national or international standards acceptable to the Administration.*
- (29) *Storage lockers for gas cylinders are to be provided with-*
- (a) *effective ventilation;*
 - (b) *an outward-opening door accessible directly to the open deck;*
 - (c) *gas-tight boundaries, including doors and other means of closing any openings therein, which form boundaries between such lockers and adjoining spaces; and*
 - (d) *equipment and fittings which are to be certified as safe for the environment in which they are being used,*
- (30) *Spaces using gaseous fuel for heating, cooking or other purposes shall be provided with an effective power ventilation system which shall be in operation at all times when gas is being used in such spaces and means shall be provided on the navigation bridge to indicate any loss of the required ventilating capacity.*

Miscellaneous Items of Ignition Sources and Ignitability

- (31) Electric radiators, if used, shall be fixed in position and so constructed as to reduce fire risks to a minimum and no such radiators shall be fitted with an element so exposed that clothing, curtains, or other similar materials can be scorched or set on fire by heat from the element.
- (32) *Waste receptacles shall be constructed of non-combustible materials with no openings in the sides or bottom subject to the following-*
- (a) *plastic bins in galleys are for food waste only and should be clearly marked in accordance with vessels Garbage Management Plan;*
 - (b) *plastic bins in galleys used for Glass and Tins only should be suitably marked in accordance with the Garbage Management Plan and kept clear from any heat source; and*
 - (c) *fire retardant fibreglass bins are acceptable for general waste around the ship provided they are fitted with metal liners.*

- (33) In spaces where penetration of oil products is possible, the surface of insulation shall be impervious to oil or oil vapours.
- (34) *Notwithstanding 6.4(4) & (5) primary deck coverings, if applied within accommodation and service spaces, control stations, and cabin balconies shall be of approved material which will not readily ignite, this being determined in accordance with the Fire Test Procedures Code.*

6.3 **Fire Growth Potential:**

Purpose

- (1) The purpose of this paragraph is to limit the fire growth potential in every space of the ship and for this purpose, the following functional requirements shall be met-
- (a) means of control for the air supply to the space shall be provided;
 - (b) means of control for flammable liquids in the space shall be provided; and
 - (c) the use of combustible materials shall be restricted.

Control of Air Supply and Flammable Liquid to the Space

- (2) The main inlets and outlets of all ventilation systems shall be capable of being closed from outside the spaces being ventilated and the means of closing shall be easily accessible as well as prominently and permanently marked and shall indicate whether the shut-off is open or closed.
- (3) Power ventilation of accommodation spaces, service spaces, control stations and machinery spaces shall be capable of being stopped from an easily accessible position outside the space being served and this position shall not be readily cut off in the event of a fire in the spaces served.
- (4) Means of control shall be provided for opening and closure of skylights, closure of openings in funnels which normally allow exhaust ventilation and closure of ventilator dampers.
- (5) Means of control shall be provided for stopping ventilating fans in accordance with the following provisions-
- (a) controls provided for the power ventilation serving machinery spaces shall be grouped so as to be operable from two positions, one of which shall be outside such spaces; and
 - (b) the means provided for stopping the power ventilation of the machinery spaces shall be entirely separate from the means provided for stopping ventilation of other spaces.
- (6) Means of control shall be provided for stopping forced and induced draught fans, oil fuel transfer pumps, oil fuel unit pumps, lubricating oil service pumps, thermal

oil circulating pumps and oil separators (purifiers) provided that subsections (7) and (8) need not apply to oily water separators.

- (7) The controls required in subsections (4) to (6) and in subsection 6.2(9) shall be located outside the space served so they will not be cut off in the event of fire in that space.
- (8) The controls required in subsections (4) to (7) and in sections 6.6.(5) and 6.6(6) and the controls for any required fire-extinguishing system shall be situated at one control position or grouped in as few positions as possible to the satisfaction of the Administration and such positions shall have a safe access from the open deck.

Additional Requirements for Means of Control in Periodically Unattended Machinery Spaces

- (9) For periodically unattended machinery spaces, the Administration shall give special consideration to maintaining the fire integrity of the machinery spaces, the location and centralisation of the fire-extinguishing system controls, the required shutdown arrangements (e.g., ventilation, fuel pumps, etc.) and any additional fire-extinguishing appliances and other fire-fighting equipment and breathing apparatus that may be required and these requirements shall be at least equivalent to those of machinery spaces normally attended. *(Note; but see section 5.3(1) which prohibits unattended machinery spaces operations on Code vessels)*

Use of Non-Combustible Materials

- (10) Insulating materials in spaces, other than in mail rooms, baggage rooms and refrigerated compartments of service spaces, shall be non-combustible provided that vapour barriers and adhesives used in conjunction with insulation, as well as the insulation of pipe fittings for cold service systems, need not be of non-combustible materials, but they shall be kept to the minimum quantity practicable and their exposed surfaces shall have low flame-spread characteristics.
- (11) All linings, grounds, draught stops and ceilings used internally or on open decks, bulkheads and overhangs shall be of non-combustible material except in saunas or refrigerated compartments of service spaces; partial bulkheads or decks used to subdivide a space for utility or artistic treatment shall also be of non-combustible materials.
- (12) Open decks, bulkheads and divisions of "A", "B" or "C" class in accommodation, service spaces and cabin balconies which are faced with combustible materials, facings, mouldings, decorations and veneers shall comply with the provisions of subsections (13) to (15) and section 6.4, provided that natural hard wood decking, traditional wooden benches, wooden linings on bulkheads and ceilings are permitted in open decks and saunas and such materials need not be subject to the calculations prescribed in subsections (13) and (14): *provided that where it is possible to readily direct a jet of water, for fire fighting purposes, on to an open deck or cabin balcony from the deck immediately above, or adjacent, the restrictions on materials used bulkheads and divisions on such an open deck or balcony may be relaxed, except for open decks and cabin balconies adjacent to life*

saving appliances, as referred to in section 6.5(11), where an evaluation of the fire risk²² should be conducted and mitigation measures put in place to the satisfaction of the Administration; see also subparagraphs (14), (15), (17), (19) and (20).

- (13) Combustible materials used on the surfaces and linings specified in subsection (12), except for open decks, shall have a calorific value²³ not exceeding 45 MJ/m² of the area for the thickness used; provided that the requirements of this paragraph are not applicable to the surfaces of furniture fixed to linings or bulkheads.
- (14) *Subject to subsection (15), furniture and furnishings on open decks shall comply with Regulation 5.3.4 of Chapter II-2 of SOLAS unless such open decks are protected by a fixed pressure water-spraying and fixed fire detection system and alarm system.*
- (15) *Except for open decks adjacent to life saving appliances, as referred to in section 6.5(11), the furniture and furnishings on the open decks referred to in subsection (14) need not comply with Regulation 5.3.4 of Chapter II-2 of SOLAS provided it is possible to readily direct a jet of water, for fire fighting purposes, on to such a deck from the deck immediately above or adjacent.*
- (16) Where combustible materials are used in the vessel interior in accordance with subsection (12), they shall comply with the following requirements-
- (a) the total volume of combustible facings, mouldings, decorations and veneers in accommodation and service spaces shall not exceed a volume equivalent to 2.5 millimetres veneer on the combined area of the walls and ceiling linings. Furniture fixed to linings, bulkheads or decks need not be included in the calculation of the total volume of combustible materials; and
 - (b) in the case of ships fitted with an automatic sprinkler system complying with the provisions of the Fire Safety Systems Code, the above volume may include some combustible material used for erection of "C" class divisions.
- (17) The following surfaces shall have low flame-spread characteristics in accordance with the Fire Test Procedures Code-
- (a) exposed surfaces in corridors and stairway enclosures and of bulkhead and ceiling linings in accommodation and service spaces (except saunas) and control stations;
 - (b) surfaces and grounds in concealed or inaccessible spaces in accommodation and service spaces and control stations; and
 - (c) exposed surfaces of cabin balconies except for natural hardwood decking systems: provided that this section need not apply where it is possible to readily direct a jet of water, for fire fighting purposes, on to such a balcony

²² Refer to MSC.1/Circ.1274 - Guidelines for Evaluation of Fire Risk of External Areas on Passenger Ships

²³ Refer to the recommendations published by the International Organization for Standardization, in particular publication ISO 1716:2002, *Determination of calorific potential*.

from the deck immediately above or adjacent, and the balcony is not adjacent to life saving appliances;

- (18) *the Administration may relax the provisions of 6.3(17) in areas appropriated for the use of the owner and guests, other than in relation to escape routes, stairway enclosures and corridors, provided that-*
- (a) *such owner and guest spaces within such areas are individually bounded by divisions with fire integrity in accordance with Tables 6.1 and 6.2;*
 - (b) *the spaces are fitted with a fully addressable fire detection system and a fixed fire fighting system complying with the relevant provision of the FSS Code;*
 - (c) *in all cases the Administration is consulted, either directly or through the vessel's Classification Society and a detailed proposal with respect to the material to be used and its intended location is submitted as part of the consultation process;*
- (19) *In applying the provisions of paragraph (18), the overall fire, smoke and toxicity characteristics of the materials to be used may be taken into account as part of the overall assessment.*
- (20) Furniture within stairway enclosures shall be subject to the following provisions-
- (a) furniture in stairway enclosures shall-
 - (i) be fixed and limited to no more than six seats on each deck in each stairway enclosure;
 - (ii) be of restricted fire risk determined in accordance with the Fire Test Procedures Code; and
 - (iii) not restrict the passenger escape route;
 - (iv) provided that Administration may permit additional seating in the main reception area within a stairway enclosure if it is fixed, non-combustible and does not restrict the passenger escape route.
 - (b) furniture shall not be permitted in passenger and crew corridors and stairs forming escape routes in cabin areas, provided that-
 - (i) lockers of non-combustible material, providing storage for non-hazardous safety equipment required by this Chapter; and
 - (ii) drinking water dispensers, ice cube machines, decorative flower or plant arrangements, statues or other objects of art such as paintings and tapestries;
 may be permitted in corridors and stairways where these are fixed and do not restrict the width of the escape routes.
- (21) *Subject to subparagraph (22), furniture and furnishings on cabin balconies shall comply with section 6.7(1)(d), subparagraphs (i),(ii), (iii), (vi) and (vii) unless such balconies are protected by a fixed pressure water-spraying and fixed fire detection*

and fire alarm systems complying with SOLAS Chapter II-2, Part C, regulations 7.10 and 10.6.1.3.

- (22) *Except for open decks adjacent to life saving appliances, as referred to in section 6.5(11), the furniture and furnishings on the cabin balconies referred to in subsection (19) need not comply with Regulation 5.3.4 of Chapter II-2 of SOLAS provided it is possible to readily direct a jet of water, for fire-fighting purposes, on to such a deck from the deck immediately above or adjacent.*
- (23) *Furniture and furnishings on open decks adjacent to survival craft, rescue boats and their respective launching and embarkation stations, should have their fire risk evaluated²⁴ and mitigation measures put in place to the satisfaction of the Administration. The following are considered as providing suitable mitigating measures to give a level of risk to be accepted:*
- (a) *The furniture and furnishings should be of a restricted fire risk as per SOLAS II-2 reg 3.40*
 - (b) *Use of upholstered furniture in accordance with FTP Code Part 8;*
 - (c) *Local portable fire fighting appliances for Class A fires;*
 - (d) *Fixed fire detection and firefighting systems suitable for open decks;*
 - (e) *Restricted use of non fixed furnishing; and*
 - (f) *Furniture not to be immediately adjacent to or proving storage for the LSA.*

6.4 Smoke Generation Potential and Toxicity:

Purpose

- (1) The purpose of this paragraph is to reduce the hazard to life from smoke and toxic products generated during a fire in spaces where persons normally work or live by limiting the quantity of smoke and toxic products released from combustible materials, including surface finishes, during a fire.

Paints, Varnishes and other Finishes

- (2) Paints, varnishes and other finishes used on exposed interior surfaces shall not be capable of producing excessive quantities of smoke and toxic products, this being determined in accordance with the Fire Test Procedures Code.
- (3) Paints, varnishes and other finishes used on exposed surfaces of cabin balconies, excluding natural hard wood decking systems, shall not be capable of producing excessive quantities of smoke and toxic products, this being determined in accordance with the Fire Test Procedures Code.

²⁴ Refer to MSC.1/Circ.1274 - Guidelines for Evaluation of Fire Risk of External Areas on Passenger Ships

Primary Deck Coverings

- (4) *Notwithstanding 6.2(34), primary deck coverings, if applied within accommodation and service spaces, control stations and on open decks shall be of approved material which will not give rise to smoke or toxic or explosive hazards at elevated temperatures, this being determined in accordance with the Fire Test Procedures Code.*
- (5) Notwithstanding 6.2(34) primary deck coverings on cabin balconies shall not give rise to smoke, toxic or explosive hazards at elevated temperatures, this being determined in accordance with the Fire Test Procedures Code.

6.5 Detection and Alarm:*Purpose*

- (1) The purpose of this paragraph is to detect a fire in the space of origin and to provide for alarm for safe escape and fire-fighting activity and for this purpose, the following functional requirements shall be met-
 - (a) fixed fire detection and fire alarm system installations shall be suitable for the nature of the space, fire growth potential and potential generation of smoke and gases;
 - (b) manually operated call points shall be placed effectively to ensure a readily accessible means of notification; and
 - (c) *fixed fire detection and fire alarm system installations shall be capable of remotely and individually identifying each detector and manually operated call point.*

General Requirements

- (2) A fixed fire detection and fire alarm system shall be provided in accordance with the provisions of this paragraph.
- (3) A fixed fire detection and fire alarm system and a sample extraction smoke detection system required in this paragraph and other paragraphs in this part shall be of an approved type and comply with the Fire Safety Systems Code.
- (4) Where a fixed fire detection and fire alarm system is required for the protection of spaces other than those specified in subsection (9), at least one detector complying with the Fire Safety Systems Code shall be installed in each such space.

Initial and Periodical Tests

- (5) The function of fixed fire detection and fire alarm systems required by the relevant requirements of this Chapter shall be tested under varying conditions of ventilation after installation.

- (6) The function of fixed fire detection and fire alarm systems shall be periodically tested to the satisfaction of the Administration by means of equipment producing hot air at the appropriate temperature, or smoke or aerosol particles having the appropriate range of density or particle size, or other phenomena associated with incipient fires to which the detector is designed to respond.

Protection of Machinery Spaces

- (7) A fixed fire detection and fire alarm system shall be installed in-
- (a) periodically unattended machinery spaces; and
 - (b) machinery spaces where-
 - (i) the installation of automatic and remote control systems and equipment has been approved in lieu of continuous manning of the space; and
 - (ii) the main propulsion and associated machinery, including the main sources of electrical power, are provided with various degrees of automatic or remote control and are under continuous manned supervision from a control room.
- (8) The fixed fire detection and fire alarm system required in subsection (1) shall-
- (a) be so designed and the detectors so positioned as to detect rapidly the onset of fire in any part of those spaces and under any normal conditions of operation of the machinery and variations of ventilation as required by the possible range of ambient temperatures;
 - (b) detection systems using only thermal detectors shall not be permitted except in spaces of restricted height and where their use is appropriate;
 - (c) the detection system shall initiate local and remote audible and visual alarms distinct in both respects from the alarms of any other system not indicating fire, in sufficient places to ensure that the alarms are heard and observed on the navigation bridge or continuously manned central control station and by a responsible engineer officer.

Protection of Accommodation and Service Spaces and Control Stations

- (9) Smoke detectors shall be installed in all cabins, stairways, corridors and escape routes within accommodation spaces as provided in subsection (10); consideration shall also be given to the installation of special purpose smoke detectors within ventilation ducting.
- (10) *There shall be installed in every ship throughout each separate zone, whether vertical or horizontal, in all accommodation and service spaces and, where it is considered necessary by the Administration, in control stations, except spaces which afford no substantial fire risk such as void spaces and sanitary spaces, an automatic sprinkler, a fire detection and fire alarm system of an approved type complying with the relevant requirements of the Fire Safety Systems Code and with the provisions of subsection (16) and so installed and arranged as to protect such spaces.*

- (11) *The construction of ceilings and bulkheads shall be such that it will be possible, without impairing the efficiency of the fire protection to detect any smoke originating in concealed and inaccessible places (requiring tools to access), except where in the opinion of the Administration there is no risk of fire originating in such places due to there being no ignition sources.*
- (12) *Manually operated call points complying with the Fire Safety Systems Code shall be installed throughout the accommodation spaces, service spaces, control stations and external deck areas such that*
- (a) *one manually operated call point shall be located at each exit;*
 - (b) *manually operated call points shall be readily accessible in the corridors of each deck such that no part of the corridor is more than 20 metres from such a point; and*
 - (c) *manually operated call points shall be located on external decks where a source of ignition or fire risk is identified beneath an overhanging structure.*

Fire Alarm Signaling Systems²⁵

- (13) *Ships shall at all times when at sea, or in port (except when out of service), be so manned or equipped as to ensure that any initial fire alarm is immediately received by a responsible member of the crew either:*
- (a) *on the bridge; or*
 - (b) *at the continuously manned control station should this station be in a location other than on the bridge; and*
 - (c) *when more than 12 passengers are carried the navigation bridge shall be manned at all times.*
- (14) *The control panel of fixed fire detection and fire alarm systems shall be designed on the fail-safe principle (e.g., an open detector circuit shall cause an alarm condition).*
- (15) *The fire detection and fire alarms system required by subsection (10) shall comply with the following requirements-*
- (a) *it shall be centralised in a continuously manned central control station, which may be the navigation bridge;*
 - (b) *in addition, controls for fire pumps and emergency fire pumps, remote closing of the watertight and semi-watertight doors, fire doors, release of smoke from machinery spaces and shutting down the ventilation fans shall be centralised in the same location as that referred to in paragraph (a) above;*

²⁵ Refer to the Code on Alerts and Indicators adopted by the IMO by Resolution A.1021(26).

- (c) *the ventilation fans shall be capable of reactivation by the crew at the continuously manned control station;*
 - (d) *the control panels in the central control station shall be capable of indicating open or closed positions of watertight and semi-watertight doors, fire doors, on or off status of the detectors, manual call points, alarms and fans;*
 - (e) *the control panel shall be continuously powered and shall have an automatic change-over to standby power supply in case of loss of normal power supply; and*
 - (f) *the control panel shall be powered from the main source of electrical power and the emergency source of electrical power.*
- (16) A special alarm, operated from the navigation bridge and fire control station, shall be fitted to summon the crew and this alarm may be part of the ship's general emergency alarm system and shall be capable of being sounded independently of the alarm to the passenger spaces.
- (17) A fixed fire detection and fire alarm system complying with the provisions of the Fire Safety Systems Code shall be installed on cabin balconies of ships to which SOLAS Chapter II-2, Part B, regulation 5.3.4 applies, when furniture and furnishings on such balconies are not as defined in section 6.7(1)(d), subparagraphs (i),(ii),(iii), (vi) and (vii).

6.6 Control of Smoke Spread:

Purpose

- (1) The purpose of this part is to control the spread of smoke in order to minimise the hazards from smoke by providing means for controlling smoke in atriums, control stations, machinery spaces and concealed spaces.

Protection of Control Stations outside Machinery Spaces

- (2) Practicable measures shall be taken for control stations outside machinery spaces in order to ensure that ventilation, visibility and freedom from smoke are maintained within them so that, in the event of fire, the machinery and equipment contained therein may be supervised and continue to function effectively, such measures to include the provision of alternative and separate means of air supply arranged so that the air inlets of the two sources of supply shall be so disposed that the risk of both inlets drawing in smoke simultaneously is minimized; provided that, at the discretion of the Administration, such requirements need not apply to control stations situated on, and opening onto, an open deck or where local closing arrangements would be equally effective.
- (3) *The ventilation system serving safety centres may be derived from the ventilation system serving the navigation bridge, unless located in an adjacent main vertical zone.*

Release of Smoke from Machinery Spaces

- (4) The provisions of subsections (5) (6) and (7) shall apply to machinery spaces of category A and, where the Administration considers it desirable, to other machinery spaces.
- (5) Means of control shall be provided for permitting the release of smoke, in the event of fire, from the space to be protected and, subject to the provisions of section 6.7(50), the normal ventilation systems may be acceptable for this purpose.
- (6) Means of control shall be provided for permitting the release of smoke and such controls shall be located outside the space served so that, in the event of fire in that space, they will not be cut off.
- (7) The controls required by subsection (5) shall be situated at one control position or grouped in as few positions as possible to the satisfaction of the Administration and such positions shall have a safe access from the open deck.

Draught Stops

- (8) Air spaces enclosed behind ceilings, panelling or linings shall be divided by close-fitting draught stops spaced not more than 14 metres apart. In the vertical direction, such enclosed air spaces, including those behind linings of stairways, trunks, etc., shall be closed at each deck.

Smoke Extraction Systems in Atriums

- (9) Atriums shall be equipped with a smoke extraction system, having fans sized such that that the entire volume within the space can be exhausted in 10 minutes or less, and which shall be activated by the required smoke detection system and be capable of manual control.

6.7 Containment of Fire:*Purpose*

- (1) The purpose of this part is to contain a fire in the space of origin by meeting the following functional requirements-
 - (a) the ship shall be subdivided by thermal and structural boundaries;
 - (b) thermal insulation of boundaries shall have due regard to the fire risk of the space and adjacent spaces;
 - (c) the fire integrity of the divisions shall be maintained at openings and penetrations; and
 - (d) *for the purposes of Chapter 6 of the Code in general and for section 6.7 (Containment of Fire) in particular, rooms and spaces containing furniture and furnishings of restricted fire risk which form part of an escape route*

are those rooms and spaces (whether cabins, public spaces, offices or other types of accommodation) in which-

- (i) case furniture such as desks, wardrobes, dressing tables, bureaux, or dressers, are constructed entirely of approved non-combustible materials, except that a combustible veneer not exceeding 2 mm may be used on the working surface of such articles;
- (ii) free-standing furniture such as chairs, sofas, or tables, are constructed with frames of non-combustible materials;
- (iii) draperies, curtains and other suspended textile materials have qualities of resistance to the propagation of flame not inferior to those of wool having a mass of 0.8 kg/m², this being determined in accordance with the Fire Test Procedures Code;
- (iv) floor coverings have low flame-spread characteristics;
- (v) exposed surfaces of bulkheads, linings and ceilings have low flame-spread characteristics;
- (vi) upholstered furniture has qualities of resistance to the ignition and propagation of flame, this being determined in accordance with the Fire Test Procedures Code; and
- (vii) bedding components have qualities of resistance to the ignition and propagation of flame, this being determined in accordance with the Fire Test Procedures Code.

Thermal and Structural Subdivision

- (2) Ships shall be subdivided into spaces by thermal and structural divisions having regard to the fire risks of the spaces.

Main Vertical Zones and Horizontal Zones

- (3) The hull, superstructure and deckhouses in way of accommodation and service spaces shall be subdivided into main vertical zones by "A" class divisions and these divisions shall have insulation values in accordance with Tables 6.1 and 6.2.
- (4) The main vertical zones shall comply with the following provisions-
 - (a) the bulkheads forming the boundaries of the main vertical zones above the bulkhead deck shall as far as practicable, be in line with watertight subdivision bulkheads situated immediately below the bulkhead deck;
 - (b) the length and width of main vertical zones may be extended to a maximum of 48 metres in order to bring the ends of main vertical zones to coincide with watertight subdivision bulkheads or in order to accommodate a large public space extending for the whole length of the main vertical zone provided that the total area of the main vertical zone is not greater than 1,600 m² on any deck;

- (c) the length or width of a main vertical zone shall be the maximum distance between the furthestmost points of the bulkheads bounding it; and
 - (d) main vertical zones may be stepped or may consist of one or more horizontal zones where it is impracticable from structural or design considerations to achieve compliance otherwise; in all cases however the Administration shall be satisfied that an equivalent level of safety and protection is achieved.
- (5) Bulkheads forming the boundaries of main vertical zones shall extend from deck to deck and to the shell or other boundaries.
- (6) Where a main vertical zone is subdivided by horizontal "A" class divisions into horizontal zones for the purpose of providing an appropriate barrier between a zone with sprinklers and a zone without sprinklers, the divisions shall extend between adjacent main vertical zone bulkheads and to the shell or exterior boundaries of the ship and shall be insulated in accordance with the fire insulation and integrity values given in Table 6.2.

Bulkheads within a Main Vertical Zone

- (7) *Bulkheads within accommodation and service spaces shall meet the requirements of paragraphs (a) to (d) as appropriate taking into consideration guidelines developed by the Organization²⁶ -*
- (a) Subject to paragraphs (a) and (b), bulkheads within accommodation and service spaces which are not required to be "A" class divisions shall be at least "B" class or "C" class divisions as prescribed in Tables 6.1 and 6.2; in addition, corridor bulkheads, where not required to be "A" class, shall be "B" class divisions which shall extend from deck to deck;
 - (b) where continuous "B" class ceilings or linings are fitted on both sides of the bulkhead, the portion of the bulkhead behind the continuous ceiling or lining shall be of material which, in thickness and composition, is acceptable in the construction of "B" class divisions, but which shall be required to meet "B" class integrity standards only in so far as is reasonable and practicable in the opinion of the Administration;
 - (c) where, as will normally be the case, the ship is protected by an automatic sprinkler system complying with the provisions of the Fire Safety Systems Code, the corridor bulkheads may terminate at a ceiling in the corridor provided such bulkheads and ceilings are of "B" class standard in compliance with subsections (10) and (11): provided that all doors and frames in such bulkheads shall be of non-combustible materials and shall have the same fire integrity as the bulkhead in which they are fitted.
 - (d) *where "C" class divisions between similar purposed spaces are provided (sleeping/washing/dressing), these divisions do not need to be continuous and the group of spaces may be considered as one.*

²⁶ Refer to the Guidelines on fire safety construction in accommodation areas (MSC/Circ.917) for passenger ships carrying <36 passengers.

- (8) Bulkheads required to be "B" class divisions, except corridor bulkheads as prescribed in subsection 6.9(2), shall extend from deck to deck and to the shell or other boundaries; provided that where a continuous "B" class ceiling or lining is fitted on both sides of a bulkhead which is at least of the same fire resistance as the adjoining bulkhead, the bulkhead may terminate at the continuous ceiling or lining.

Fire Integrity of Bulkheads and Decks

- (9) In addition to complying with the specific provisions for fire integrity of bulkheads and decks, the minimum fire integrity of bulkheads and decks shall be as prescribed in Tables 6.1 and 6.2.
- (10) The following requirements shall govern application of the Tables-
- (a) Tables 6.1 and 6.2 shall apply respectively to the bulkheads and decks separating adjacent spaces;
 - (b) For determining the appropriate fire integrity standards to be applied to divisions between adjacent spaces-
 - (i) such spaces are classified according to their fire risk as shown in sub paragraphs *(ba)* to *(bk)* below;
 - (ii) where the contents and use of a space are such that there is a doubt as to its classification for the purpose of this paragraph , or where it is possible to assign two or more classifications to a space, it shall be treated as a space within the relevant category having the most stringent boundary requirements;
 - (iii) smaller, enclosed rooms within a space that have less than 30% communicating openings to that space are considered separate spaces;
 - (iv) the fire integrity of the boundary bulkheads and decks of such smaller rooms shall be as prescribed in Tables 6.1 and 6.2;
 - (v) the title of each category is intended to be typical rather than restrictive; and
 - (vi) the number in parentheses following each category refers to the applicable column or row in the Tables,
 - (ba)* control stations (1):
spaces containing emergency sources of power and lighting; wheelhouse and chartroom; spaces containing the ship's radio equipment; fire control stations; control room for propulsion machinery when located outside the machinery space; spaces containing centralised fire alarm equipment;
 - (bb)* corridors: (2):
passenger and crew corridors and lobbies;
 - (bc)* accommodation spaces (3):
spaces as defined in section 1.3 excluding corridors;

- (bd) stairways: (4)
interior stairways; lifts; totally enclosed emergency escape trunks and escalators (other than those wholly contained within the machinery spaces) and enclosures thereto (in this connection, a stairway which is enclosed only at one level shall be regarded as part of the space from which it is not separated by a fire door);
 - (be) service spaces (low risk) (5):
lockers and store-rooms not having provisions for the storage of flammable liquids and having areas less than 4m² and drying rooms and laundries;
 - (bf) machinery spaces of Category A (6):
spaces as defined in section 1.3;
 - (bg) other machinery spaces (7):
electrical equipment rooms (auto-telephone exchange, air-conditioning duct spaces); spaces as defined in section 1.3 excluding machinery spaces of category A;
 - (bh) service spaces (high risk) (9):
galleys; pantries containing cooking appliances; paint lockers; lockers and store-rooms having areas of 4m² or more; spaces for the storage of flammable liquids; saunas and workshops other than those forming part of the machinery spaces;
 - (bi) open decks (10):
open deck spaces and enclosed promenades having little or no fire risk; enclosed promenades shall have no significant fire risk, meaning that furnishing shall be restricted to deck furniture; in addition, such spaces shall be naturally ventilated by permanent openings; air spaces (the space outside superstructures and deckhouses); and
 - (bj) garage spaces (11):
spaces as defined in section 1.3.
 - (bk) Evacuation stations and external escape routes (12):
Survival craft stowage area; Open deck spaces and enclosed promenades forming lifeboat and liferaft embarkation and lowering stations; Assembly stations, internal and external; External stairs and open decks used for escape routes; The ship's side to the waterline in the lightest seagoing condition, superstructure and deckhouse sides situated below and adjacent to the liferaft and evacuation slide embarkation areas
- (11) In determining the applicable fire integrity standard of a boundary between two spaces within a main vertical zone or horizontal zone which is not protected by an automatic sprinkler system complying with the provisions of the Fire Safety

Systems Code or between such zones neither of which is so protected, the higher of the two values given in the tables shall apply.

- (12) In determining the applicable fire integrity standard of a boundary between two spaces within a main vertical zone or horizontal zone which is protected by an automatic sprinkler system complying with the provisions of the Fire Safety Systems Code or between such zones both of which are so protected, the lesser of the two values given in the tables shall apply and where a zone with sprinklers and a zone without sprinklers meet within accommodation and service spaces, the higher of the two values given in the tables shall apply to the division between the zones.
- (13) Continuous "B" class ceilings or linings, in association with the relevant decks or bulkheads, may be accepted as contributing, wholly or in part, to the required insulation and integrity of a division.
- (14) External boundaries which are required in subsection 6.9(2) to be of steel or other equivalent material may be pierced for the fitting of windows and sidescuttles provided that there is no requirement for such boundaries to have "A" class integrity. Similarly, in such boundaries which are not required to have "A" class integrity, doors may be constructed of materials which are to the satisfaction of the Administration.

Construction and Arrangement of Saunas

- (15) The perimeter of the sauna shall be of "A" class boundaries and may include changing rooms, showers and toilets and the sauna shall be insulated to "A-60" standard against other spaces except those inside of the perimeter of the sauna and spaces of category (5), (7) and (10).
- (16) Bathrooms with direct access to saunas may be considered as part of them. In such cases, the door between sauna and the bathroom need not comply with fire safety requirements.
- (17) The traditional wooden lining on the bulkheads and ceiling are permitted in the sauna provided that-
 - (a) the ceiling above the oven shall be lined with a non-combustible plate with an air gap of at least 30 millimetres; and
 - (b) the distance from the hot surfaces to combustible materials shall be at least 500 millimetres or the combustible materials shall be protected (e.g., non-combustible plate with an air gap of at least 30 millimetres).
- (18) The traditional wooden benches are permitted to be used in the sauna.
- (19) The sauna door shall open outwards by pushing.
- (20) Electrically heated ovens shall be provided with a timer.

Protection of Stairways and Lifts in Accommodation Area

- (21) Stairways shall be within enclosures formed of "A" class divisions, with positive means of closure at all openings, except that-
 - (a) a stairway connecting only two decks need not be enclosed, provided the integrity of the deck is maintained by proper bulkheads or self-closing doors in one 'tween-deck space; when a stairway is closed in one 'tween-deck space, the stairway enclosure shall be protected in accordance with the table for decks Tables 6.2; and
 - (b) Stairways may be fitted in the open in a public space, provided they lie wholly within the public space.
- (22) Lift trunks shall be so fitted as to prevent the passage of smoke and flame from one deck to another and shall be provided with means of closing so as to permit the control of draught and smoke.
- (23) Machinery for lifts located within stairway enclosures shall be arranged in a separate room, surrounded by steel boundaries, provided that small passages for lift cables are permitted.
- (24) Lifts which open into spaces other than corridors, public spaces, special category spaces, stairways and external areas shall not open into stairways included in the means of escape.
- (25) Non-load bearing partial bulkheads which separate adjacent cabin balconies shall be capable of being opened by the crew from each side for the purpose of fighting fires.

Protection of Atriums:

- (26) Atriums shall be within enclosures formed of "A" class divisions having a fire rating determined in accordance with Table 6.1.
- (27) Decks separating spaces within atriums shall have a fire rating determined in accordance with Table 6.2.

Table 6.1 - Fire Integrity of Bulkheads separating Adjacent Spaces

SPACES	SOLAS REF. No.	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(9)	(10)	(11)	(12)
	▼											
Control stations	(1)	A-0 ^c	A-0	A-60	A-0	A-15	A-60	A-15	A-60	*	A-60	A-0
Corridors	(2)		C ^e	B-0 ^e	A-0 ^a B-0 ^e	B-0 ^e	A-60	A-0	A-15 A-0 ^d	*	A-30	A-60
Accommodation spaces	(3)			C ^e	A-0 ^a B-0 ^e	B-0 ^e	A-60	A-0	A-15 A-0 ^d	*	A-30 A-0 ^d	A-60 ^{gh}
Stairways	(4)				A-0 ^a B-0 ^e	A-0 ^a B-0 ^e	A-60	A-0	A-15 A-0 ^d	*	A-30	A-0
Service spaces (low risk)	(5)					C ^e	A-60	A-0	A-0	*	A-0	A-60 ^b
Machinery spaces of Category A	(6)						*	A-0	A-60	*	A-60	A-60 ^b
Other machinery spaces	(7)							A-0 ^b	A-0	*	A-0	A-0
Service spaces (high risk)	(9)								A-0 ^b	*	A-30	A-60 ^b
Open decks	(10)									*	A-0	A-0
Garage spaces	(11)										A-30	A-60 ^g
Evacuation stations and external escape routes	(12)											

Table 6.2 - Fire Integrity of Decks separating Adjacent Spaces

SPACES BELOW ▼	SPACES ABOVE ▶	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(9)	(10)	(11)	(12)
Control stations	(1)	A-0	A-0	A-0	A-0	A-0	A-60	A-0	A-0	*	A-60	A-0
Corridors	(2)	A-0	*	*	A-0	*	A-60	A-0	A-0	*	A-30	A-60
Accommodation spaces	(3)	A-60	A-0	*	A-0	*	A-60	A-0	A-0	*	A-30 A-0 ^d	A-60
Stairways	(4)	A-0	A-0	A-0	*	A-0	A-60	A-0	A-0	*	A-30	A-0
Service spaces (low risk)	(5)	A-15	A-0	A-0	A-0	*	A-60	A-0	A-0	*	A-0	A-60
Machinery spaces of Category A	(6)	A-60	A-60	A-60	A-60	A-60	*	A-60 ^f	A-60	*	A-60	A-60
Other machinery spaces	(7)	A-15	A-0	A-0	A-0	A-0	A-0	*	A-0	*	A-0	A-60
Service spaces (high risk)	(9)	A-60	A-30 A-0 ^d	A-30 A-0 ^d	A-30 A-0 ^d	A-0	A-60	A-0	A-0	*	A-30	A-60
Open decks	(10)	*	*	*	*	*	*	*	*	---	A-0	A-0
Garage spaces	(11)	A-60	A-30	A-30 A-0 ^d	A-30	A-0	A-60	A-0	A-30	A-0	A-30	A-60
Evacuation stations and external escape routes	(12)	A-0	A-0	A-0	A-0	A-0	A-0	A-0	A-0	---	A-0	A-0

Notes: To be applied to both tables 6.1 and 6.2 as appropriate

(For clarification as to which applies, see subsections (7) & (8) and subsections (21) and (24))

^a For clarification as to which applies, see paragraphs 6.7(7) & (8) and 6.7(21) to (25)

^b Where spaces are of the same numerical category and superscript "b" appears, a bulkhead or deck of the rating shown in the tables is only required when the adjacent spaces are for a different purpose (e.g., in category (9)). A galley next to a galley does not require a bulkhead, but a galley next to a paint room requires an "A-0" bulkhead.

^c Bulkheads separating the wheelhouse and chartroom from each other may have a "B-0" rating. No fire rating is required for those partitions separating the navigation bridge and the safety centre when the latter is within the navigation bridge.

^d See subsections (11) and (12).

^e For the application of subsection (3), "B-0" and "C", where appearing in Table 6.1, shall be read as "A-0".

^f Fire insulation need not be fitted if the machinery space in category (7), in the opinion of the Administration, has little or no fire risk.

^g The ship's side, to the waterline in the lightest seagoing condition, superstructure and deckhouse sides situated below and adjacent to liferafts and evacuation slides may be reduced to "A-30".

^h Where spaces of categories (6), (7), (8) and (9) are located completely within the outer perimeter of the assembly station, the bulkheads of these spaces are allowed to be of "B-0" class integrity. Control positions for audio, video and light installations may be considered as part of the assembly station.

* Where an asterisk appears in the Tables it indicates that-

- (a) the division is required to be of steel or other equivalent material, but is not required to be of "A" class standard subject to (e) below; however, where a deck, except in a category (10) space, is penetrated for the passage of electric cables, pipes and vent ducts, such penetrations shall be made tight to prevent the passage of flame and smoke;
- (b) divisions between control stations (emergency generators) and open decks may have air intake openings without means for closure; unless a fixed gas fire-extinguishing system is fitted *in the control station*;
- (c) for the application of subsection 6.7(3), in Table 6.2, "A" class divisions shall be read as "A-0", except for category (10);
- (d) for windows and doors, subsection 6.7(46) shall apply; and
- (e) boundaries facing life-saving appliances (except those leading from stairways), embarkation and assembly stations, external stairs and open decks used for escape routes, and situated below survival craft, liferaft and escape slide embarkation areas shall have the same fire integrity as a window or door as per subsection 6.7(46)(a) to (d).

Penetrations in Fire-Resisting Divisions and Prevention of Heat Transmission

- (28) Where "A" class divisions are penetrated, such penetrations shall comply with the following provisions-
- (a) subject to the provisions of subsection (36), the penetrations shall be tested in accordance with the Fire Test Procedures Code;
 - (b) in the case of ventilation ducts, subsections (57), (61) and (62) shall apply;
 - (c) where a pipe penetration is made of steel or equivalent material having a thickness of 3 millimetres or greater and a length of not less than 900 millimetres (preferably 450 millimetres on each side of the division), and there are no openings, testing is not required but such penetrations shall be suitably insulated by extension of the insulation at the same level of the division being penetrated.
- (29) Where "B" class divisions are penetrated for the passage of electric cables, pipes, trunks, ducts, etc., or for the fitting of ventilation terminals, lighting fixtures and similar devices, such penetrations shall comply with the following provisions-
- (a) subject to the provisions of subsection (70), arrangements shall be made to ensure that the fire resistance is not impaired;
 - (b) pipes other than steel or copper that shall be protected by either-
 - (i) a fire-tested penetration device suitable for the fire resistance of the division pierced and the type of pipe used; or
 - (ii) a steel sleeve, having a thickness of not less than 1.8 millimetres and a length of not less than 900 millimetres for pipe diameters of 150 millimetres or more and not less than 600 millimetres for pipe diameters of less than 150 millimetres (preferably equally divided to each side of the division). The pipe shall be connected to the ends of the sleeve by flanges or couplings; or the clearance between the sleeve and the pipe shall not exceed 2.5 millimetres; or any clearance between pipe and sleeve shall be made tight by means of non-combustible or other suitable material.

- (30) Uninsulated metallic pipes penetrating "A" or "B" class divisions shall be of materials having a melting temperature which exceeds 950°C for "A-0" and 850°C for "B-0" class divisions.
- (31) In approving structural fire protection details, the Administration shall have regard to the risk of heat transmission at intersections and terminal points of required thermal barriers. The insulation of a deck or bulkhead shall be carried past the penetration, intersection or terminal point for a distance of at least 450 millimetres in the case of steel and aluminium structures. If a space is divided with a deck or a bulkhead of "A" class standard having insulation of different values, the insulation with the higher value shall continue on the deck or bulkhead with the insulation of the lesser value for a distance of at least 450 millimetres.

Protection of Openings in Fire-Resisting Divisions

- (32) Openings shall be provided with permanently attached means of closing which shall be at least as effective for resisting fires as the divisions in which they are fitted.
- (33) The construction of doors and door frames in "A" class divisions, with the means of securing them when closed, shall comply with the following provisions-
 - (a) the construction shall provide resistance to fire as well as to the passage of smoke and flame equivalent to that of the bulkheads in which the doors are situated, this being determined in accordance with the Fire Test Procedures Code;
 - (b) doors and door frames shall be constructed of steel or other equivalent material (for glass doors refer to 2.12(22));
 - (c) steel watertight doors need not be insulated;
 - (d) doors approved without the sill being part of the frame, shall be installed such that the gap under the door does not exceed 12 mm;
 - (e) a non-combustible sill shall be installed under the door such that floor coverings do not extend beneath the closed door.
- (34) It shall be possible for each door to be opened and closed from each side of the bulkhead by one person only.
- (35) Fire doors in main vertical zone bulkheads, galley boundaries and stairway enclosures other than power-operated watertight doors and those which are normally locked shall satisfy the following requirements:
 - (a) the doors shall be self-closing and be capable of closing with an angle of inclination of up to 3.5° opposing closure;
 - (b) the approximate time of closure for hinged fire doors shall be no more than 40s and no less than 10 seconds from the beginning of their movement with the ship in upright position. The approximate uniform rate of closure for

- sliding doors shall be of no more than 0.2 m/s and no less than 0.1 m/s with the ship in upright position;
- (c) the doors, except those for emergency escape trunks, shall be capable of remote release from the continuously manned central control station, either simultaneously or in groups, and shall be capable of release also individually from a position at both sides of the door. Release switches shall have an on-off function to prevent automatic resetting of the system;
 - (d) hold-back hooks not subject to central control station release are prohibited;
 - (e) a door closed remotely from the central control station shall be capable of being re-opened from both sides of the door by local control. After such local opening, the door shall automatically close again;
 - (f) indication shall be provided at the fire door indicator panel in the continuously manned central control station whether each door is closed;
 - (g) the release mechanism shall be so designed that the door will automatically close in the event of disruption of the control system or central power supply;
 - (h) local power accumulators for power-operated doors shall be provided in the immediate vicinity of the doors to enable the doors to be operated at least ten times (fully opened and closed) after disruption of the control system or central power supply using the local controls;
 - (i) disruption of the control system or central power supply at one door shall not impair the safe functioning of the other doors;
 - (j) remote-released sliding or power-operated doors shall be equipped with an alarm that sounds at least 5 seconds but no more than 10 seconds, after the door is released from the central control station and before the door begins to move and continues sounding until the door is completely closed;
 - (k) a door designed to re-open upon contacting an object in its path shall re-open not more than 1 metre from the point of contact;
 - (l) double-leaf doors equipped with a latch necessary for their fire integrity shall have a latch that is automatically activated by the operation of the doors when released by the system;
 - (m) the components of the local control system shall be accessible for maintenance and adjusting;
 - (n) power-operated doors shall be provided with a control system of an approved type which shall be able to operate in case of fire and be in accordance with the Fire Test Procedures Code. This system shall satisfy the following requirements-
 - (i) the control system shall be able to operate the door at the temperature of at least 200°C for at least 60 min, served by the power supply;
 - (ii) the power for all other doors not subject to fire shall not be impaired; and

- (iii) at temperatures exceeding 200°C, the control system shall be automatically isolated from the power supply and shall be capable of keeping the door closed up to at least 945°C.
- (36) Where a space is protected by an automatic sprinkler fire detection and fire alarm system complying with the provisions of the Fire Safety Systems Code or fitted with a continuous "B" class ceiling, openings in decks not forming steps in main vertical zones nor bounding horizontal zones shall be closed reasonably tight and such decks shall meet the "A" class integrity requirements in so far as is reasonable and practicable in the opinion of the Administration.
- (37) The requirements for "A" class integrity of the outer boundaries of a ship shall not apply to-
 - (a) glass partitions, windows and sidescuttles, provided that there is no requirement for such boundaries to have "A" class integrity in subsection (46);
 - (b) exterior doors, except for those in superstructures and deckhouses facing life-saving appliances, embarkation and external assembly station areas, external stairs and open decks used for escape routes; and
 - (c) *stairway enclosure doors, glass doors and windows*
- (38) Except for watertight doors, weathertight doors, semi-watertight doors, doors leading to the open deck and doors which need to be reasonably gastight, all "A" class doors located in stairways, public spaces and main vertical zone bulkheads in escape routes shall be equipped with a self-closing hose port, the material, construction and fire resistance of which shall be equivalent to the door into which it is fitted, and the port shall be a 150 millimetres square clear opening with the door closed and shall be inset into the lower edge of the door, opposite the door hinges or, in the case of sliding doors, nearest the opening.
- (39) Ventilation ducts passing through main vertical zone divisions must be kept to a minimum and where it is necessary that a such a duct passes through a main vertical zone division, a fail-safe automatic closing fire damper shall be fitted adjacent to the division complying with the following provisions-
 - (a) the damper shall be capable of being manually closed from each side of the division;
 - (b) the operating position of the damper shall be readily accessible and be marked in red light-reflecting colour;
 - (c) the duct between the division and the damper shall be of steel or other equivalent material and, if necessary, insulated to comply with the requirements of subsection (28); and
 - (d) the damper shall be fitted on at least one side of the division with a visible indicator showing whether the damper is in the open position.

Openings in "B" Class Divisions

- (40) Doors and door frames in "B" class divisions and means of securing them shall provide a method of closure which shall have resistance to fire equivalent to that of the divisions, this being determined in accordance with the Fire Test Procedures Code provided that that ventilation openings may be permitted in the lower portion of such doors as follows-
- (a) where such opening is in or under a door the total net area of any such opening or openings shall not exceed 0.05 m²;
 - (b) alternatively, a non-combustible air balance duct routed between the cabin and the corridor, and located below the sanitary unit, is permitted where the cross-sectional area of the duct does not exceed 0.05m²;
 - (c) all ventilation openings shall be fitted with a grill made of non-combustible material;
 - (d) doors shall be non-combustible; and
 - (e) doors approved without the sill being part of the frame, shall be installed such that the gap under the door does not exceed 25 mm.
- (41) Cabin doors in "B" class divisions shall be of a self-closing type. Hold-back hooks are not permitted.
- (42) The requirements for "B" class integrity of the outer boundaries of a ship shall not apply to glass partitions, windows and sidescuttles. Similarly, the requirements for "B" class integrity shall not apply to exterior doors in superstructures and deckhouses. The Administration may permit the use of combustible materials in doors separating cabins from the individual interior sanitary spaces such as showers.
- (43) The following provisions apply to openings in "B" Class Divisions-
- (a) openings in decks not forming steps in main vertical zones nor bounding horizontal zones shall be closed reasonably tight and such decks shall meet the "B" class integrity requirements in so far as is reasonable and practicable in the opinion of the Administration; and
 - (b) openings in corridor bulkheads of "B" class materials shall be protected in accordance with the provisions of subsections (8) and (9).

Windows, Sidescuttles Weathertight and Watertight Doors

- (44) Windows and sidescuttles in bulkheads within accommodation and service spaces and control stations other than those to which the provisions of subsections (35) and (40) apply shall be so constructed as to preserve the integrity requirements of the type of bulkheads in which they are fitted, this being determined in accordance with the Fire Test Procedures Code.
- (45) A-class windows and sidescuttles in bulkheads separating accommodation and service spaces and control stations from weather shall be constructed with frames

of steel or other suitable material and the glass shall be mechanically retained. See also 2.12(22).

- (46) *Windows and doors (except those leading from stairways)-facing life-saving appliances, embarkation and assembly stations, external stairs and open decks used for escape routes, and windows situated below survival craft, liferaft and escape slide embarkation areas shall have the following fire integrity:*
- (a) *open decks used as embarkation and assembly stations shall be to class "A-30" standard; and*
 - (b) *areas in the ship's side situated below survival craft launching positions, escape slide arrangements or stowage areas for survival craft, shall also be to class "A-30" standard; and*
 - (c) *where no lifeboats are fitted, areas in the ship's side situated below the rescue boat launching positions, and stowage areas for rescue boats, shall also be to class "A-30" standard; and*
 - (d) *open decks, including external stairs, used as escape routes, shall be to class "A-0" standard unless, with the conditions in subparagraph (i), the requirements in subparagraph (ii) are complied with:*
 - (i) *A fire within a space in which the window/door is located should be assumed to result in all the windows or doors failing in that space, rendering the fire boundary in which they are situated ineffective, creating a 'failed fire boundary'. Windows located beyond a B-Class deck to deck boundary or higher fire rating, are considered to be located in a separate space.*
 - (ii) *There must continue to be a means of escape providing direct access to the embarkation deck by way of external stairways/passageways, that does not:*
 - (ba)** *pass along a 'failed fire boundary';*
 - (bb)** *require the use of the second means of escape required by 6.11(9) & (11); or*
 - (bc)** *require the escaping person(s) to have to return along, down or up the escape route that they have already passed.*
- (47) *Where automatic dedicated sprinkler heads are provided for windows or glass doors, "A-0" windows or glass doors may be accepted as equivalent to those required under subsection (46); provided that to be considered under this paragraph, the sprinkler heads shall either be-*
- (a) *dedicated heads located above the windows or glass doors, and installed in addition to the conventional ceiling sprinklers;*
 - (b) *conventional ceiling sprinkler heads arranged such that the window or glass door is protected by an average application rate of at least*

5l/min/m² and the additional window area is included in the calculation of the area of coverage; or

- (c) *water-mist nozzles that have been tested and approved in accordance with the guidelines approved by the IMO.*

- (48) Steel watertight doors need not be insulated.

Protection of Openings in Machinery Spaces Boundaries

- (49) The provision of subsections (50) to (55) shall apply to machinery spaces of category A and, where the Administration considers it desirable, to other machinery spaces.
- (50) The number of skylights, doors, ventilators, openings in funnels to permit exhaust ventilation and other openings to machinery spaces shall be reduced to a minimum consistent with the needs of ventilation and the proper and safe working of the ship.
- (51) Skylights shall be of steel and shall not contain glass panels.
- (52) Means of control shall be provided for closing power-operated doors or actuating release mechanisms on doors other than power-operated watertight doors and such controls shall be located outside the space served so that they will not be cut off in the event of fire in that place.
- (53) The means of control required in subsection (52) shall be situated at one control position or grouped in as few positions as possible to the satisfaction of the Administration and such positions shall have safe access from the open deck.
- (54) Doors, other than power-operated watertight doors, shall be so arranged that positive closure is assured in case of fire in the space by power-operated closing arrangements or by the provision of self-closing doors capable of closing against an inclination of 3.5° opposing closure, and having a fail-safe hold-back arrangement; provided with a remotely operated release device; provided that doors for emergency escape trunks need not be fitted with a fail-safe hold-back facility and a remotely operated release device.
- (55) Windows shall not be fitted in machinery space boundaries. However, this does not preclude the use of glass in control rooms within the machinery spaces.

Ventilation Systems

- (56) Ventilation ducts, including single and double wall ducts, shall be of steel or equivalent material except flexible bellows of short length not exceeding 600 mm used for connecting fans to the ducting in air-conditioning rooms. Unless expressly provided otherwise in paragraph (61), any other material used in the construction of ducts, including insulation, shall also be non-combustible. However, short ducts,

not generally exceeding 2 m in length and with a free cross-sectional area²⁷ not exceeding 0.02 m², need not be of steel or equivalent material, subject to the following conditions:

- (a) the ducts shall be made of non-combustible material, which may be faced internally and externally with membranes having low flame-spread characteristics and, in each case, a calorific value²⁸ not exceeding 45 MJ/m² of their surface area for the thickness used;
 - (b) the ducts are only used at the end of the ventilation device; and
 - (c) the ducts are not situated less than 600 mm, measured along the duct, from an opening in an "A" or "B" class division, including continuous "B" class ceiling.
- (57) The following arrangements shall be tested in accordance with the Fire Test Procedures Code-
- (a) fire dampers, including their relevant means of operation; and
 - (b) duct penetrations through "A" class divisions. However, the test is not required where steel sleeves are directly joined to ventilation ducts by means of riveted or screwed flanges or by welding.
- (58) Fire dampers shall be easily accessible. Where they are placed behind ceilings or linings, these ceilings or linings shall be provided with an inspection hatch on which the identification number of the fire damper is marked. The fire damper identification number shall also be marked on any remote controls provided.
- (59) Ventilation ducts shall be provided with hatches for inspection and cleaning. The hatches shall be located near the fire dampers.
- (60) The main inlets and outlets of ventilation systems shall be capable of being closed from outside the spaces being ventilated. The means of closing shall be easily accessible as well as prominently and permanently marked and shall indicate the operating position of the closing device.
- (61) Combustible gaskets in flanged ventilation duct connections are not permitted within 600 mm of openings in "A" or "B" class divisions and in ducts required to be of "A" class construction.
- (62) Ventilation openings or air balance ducts between two enclosed spaces shall not be provided except as permitted by paragraph 6.7(40).
- (63) The ventilation systems for machinery spaces of category A, vehicle spaces and galleys shall, in general, be separated from each other and from the ventilation

²⁷ The term *free cross-sectional area* means, even in the case of a pre-insulated duct, the area calculated on the basis of the inner dimensions of the duct itself and not the insulation.

²⁸ Refer to the recommendations published by the International Organization for Standardization, in particular publication ISO 1716:2002, Reaction to the fire tests for building products – Determination of the heat of combustion.

systems serving other spaces. However, the galley ventilation systems need not be completely separated from other ventilation systems, but may be served by separate ducts from a ventilation unit serving other spaces. In such a case, an automatic fire damper shall be fitted in the galley ventilation duct near the ventilation unit.

- (64) Ducts provided for the ventilation of machinery spaces of category A, galleys and vehicle spaces shall not pass through accommodation spaces, service spaces, or control stations unless they comply with paragraph (66).
- (65) Ducts provided for the ventilation of accommodation spaces, service spaces or control stations shall not pass through machinery spaces of category A, galleys and vehicle spaces, unless they comply with paragraph (66).
- (66) As permitted by paragraphs (64) and (65) ducts shall be either:
- (a) constructed of steel having a thickness of at least 3 mm for ducts with a free cross-sectional area of less than 0.075 m², at least 4 mm for ducts with a free cross-sectional area of between 0.075 m² and 0.45 m², and at least 5 mm for ducts with a free cross-sectional area of over 0.45 m²;
 - (b) suitably supported and stiffened;
 - (c) fitted with automatic fire dampers close to the boundaries penetrated; and
 - (d) insulated to "A-60" class standard from the boundaries of the spaces they serve to a point at least 5 m beyond each fire damper;

or

- (e) constructed of steel in accordance with sub-sections (a) and (b); and
- (f) insulated to "A-60" class standard throughout the spaces they pass through, except for ducts that pass through the following spaces;
 - (iii) Sanitary and similar spaces such as;
 - (bd) Communal sanitary facilities, showers, baths, water closets, etc.
 - (be) Small laundry rooms.
 - (bf) Indoor swimming pool area.
 - (bg) Isolated pantries containing no cooking appliances in accommodation spaces.
 - (bh) Private sanitary facilities shall be considered a portion of the space in which they are located.
 - (iv) Tanks, voids and auxiliary machinery spaces having little or no fire risk such as;
 - (bi) Water tanks forming part of the ship's structure.
 - (bj) Voids and cofferdams.

- (bk) Auxiliary machinery space which do not contain machinery having a pressure lubrication system and where storage of combustibles is prohibited, such as:
 - (bl) . ventilation and air-conditioning rooms;
 - (bm) windlass room;
 - (bn) steering gear room;
 - (bo) stabilizer equipment room;
 - (bp) electrical propulsion motor room;
 - (bq) rooms containing section switchboards and purely electrical equipment other than oil-filled electrical transformers (above 10 kVA);
 - (br) shaft alleys and pipe tunnels;
 - (bs) spaces for pumps and refrigeration machinery (not handling or using flammable liquids).
 - (bt) Closed trunks serving the spaces listed above.
 - (bu) Other closed trunks such as pipe and cable trunks.

- (67) For the purposes of sub-paragraphs (66)(d) and (66)(f), ducts shall be insulated over their entire cross-sectional external surface. Ducts that are outside but adjacent to the specified space, and share one or more surfaces with it, shall be considered to pass through the specified space, and shall be insulated over the surface they share with the space for a distance of 450 mm past the duct²⁹.

- (68) Where it is necessary that a ventilation duct passes through a main vertical zone division, an automatic fire damper shall be fitted adjacent to the division. The damper shall also be capable of being manually closed from each side of the division. The control location shall be readily accessible and be clearly and prominently marked. The duct between the division and the damper shall be constructed of steel in accordance with sub-paragraphs (66)(a) and (66)(b) and insulated to at least the same fire integrity as the division penetrated. The damper shall be fitted on at least one side of the division with a visible indicator showing the operating position of the damper.

- (69) Ducts passing through "A" class divisions shall meet the following requirements:
 - (a) where a thin plated duct with a free cross sectional area equal to, or less than, 0.02 m² passes through "A" class divisions, the opening shall be fitted with a steel sheet sleeve having a thickness of at least 3 mm and a length of at least 200 mm, divided preferably into 100 mm on each side of a bulkhead or, in the case of a deck, wholly laid on the lower side of the decks penetrated;

²⁹ Sketches of such arrangements are contained in the Unified Interpretations of SOLAS chapter II-2 (MSC.1/Circ.1276).

- (b) where ventilation ducts with a free cross-sectional area exceeding 0.02 m², but not more than 0.075 m², pass through "A" class divisions, the openings shall be lined with steel sheet sleeves. The ducts and sleeves shall have a thickness of at least 3 mm and a length of at least 900 mm. When passing through bulkheads, this length shall be divided preferably into 450 mm on each side of the bulkhead. These ducts, or sleeves lining such ducts, shall be provided with fire insulation. The insulation shall have at least the same fire integrity as the division through which the duct passes; and
 - (c) automatic fire dampers shall be fitted in all ducts with a free cross-sectional area exceeding 0.075 m² that pass through "A" class divisions. Each damper shall be fitted close to the division penetrated and the duct between the damper and the division penetrated shall be constructed of steel in accordance with paragraphs (66)(a) and (66)(b). The fire damper shall operate automatically, but shall also be capable of being closed manually from both sides of the division. The damper shall be fitted with a visible indicator which shows the operating position of the damper. Fire dampers are not required, however, where ducts pass through spaces surrounded by "A" class divisions, without serving those spaces, provided those ducts have the same fire integrity as the divisions which they penetrate. A duct of cross-sectional area exceeding 0.075 m² shall not be divided into smaller ducts at the penetration of an "A" class division and then recombined into the original duct once through the division to avoid installing the damper required by this provision.
- (70) Ventilation ducts with a free cross-sectional area exceeding 0.02 m² passing through "B" class bulkheads shall be lined with steel sheet sleeves of 900 mm in length, divided preferably into 450 mm on each side of the bulkheads unless the duct is of steel for this length.
- (71) All fire dampers shall be capable of manual operation. The dampers shall have a direct mechanical means of release or, alternatively, be closed by electrical, hydraulic, or pneumatic operation. All dampers shall be manually operable from both sides of the division. Automatic fire dampers, including those capable of remote operation, shall have a failsafe mechanism that will close the damper in a fire even upon loss of electrical power or hydraulic or pneumatic pressure loss. Remotely operated fire dampers shall be capable of being reopened manually at the damper.
- (72) When passing through accommodation spaces or spaces containing combustible materials, the exhaust ducts from galley ranges shall be constructed in accordance with paragraphs (66)(a) and (66)(b). Each exhaust duct shall be fitted with:
- (a) a grease trap readily removable for cleaning;
 - (b) an automatically and remotely operated fire damper located in the lower end of the duct at the junction between the duct and the galley range hood and, in addition, a remotely operated fire damper in the upper end of the duct close to the outlet of the duct;

- (c) arrangements, operable from within the galley, for shutting off the exhaust and supply fans; and
 - (d) fixed means for extinguishing a fire within the duct³⁰.
- (73) Exhaust ducts from laundries shall be fitted with:
- (a) filters readily removable for cleaning purposes;
 - (b) a fire damper located in the lower end of the duct which is automatically and remotely operated;
 - (c) remote-control arrangements for shutting off the exhaust fans and supply fans from within the space and for operating the fire damper mentioned in (b); and
 - (d) suitably located hatches for inspection and cleaning.

Construction and Arrangement of Steam Room

- (74) Construction and Arrangement of Steam Rooms shall meet the following requirements:
- (a) The perimeter of the steam room may include changing rooms, showers and toilets.
 - (b) Bathrooms with direct access to suite may be considered as part of it. In such cases, the door between suite and the bathroom need not comply with fire safety requirements.
 - (c) If a steam generator of more than 5 kW is contained within the perimeter, the suite boundary should be constructed to an A-0 standard. If a steam generator of more than 5 kW is not contained within the perimeter the steam generator should be protected by A-0 standard divisions, and pipes leading to the discharge nozzles should be lagged.
 - (d) All spaces within the perimeter are to be protected by a fire detection and alarm system.

6.8 Fire Fighting:

Purpose

- (1) The purpose of this paragraph is to suppress and swiftly extinguish a fire in the space of origin by meeting the following functional requirements-
- (a) fixed fire-extinguishing systems shall be installed, having due regard to the fire growth potential of the protected spaces; and

³⁰ Refer to the recommendations published by the International Organization for Standardization, in particular publication ISO 15371:2009, Ships and marine technology – Fire-extinguishing systems for protection of galley cooking equipment.

- (b) fire-extinguishing appliances shall be readily available.

Water Supply Systems

- (2) Ships shall be provided with fire pumps, fire mains, hydrants and hoses complying with the applicable requirements of this paragraph.
- (3) Fire mains and hydrants shall comply with the following provisions-
 - (a) materials readily rendered ineffective by heat shall not be used for fire mains and hydrants unless adequately protected;
 - (b) the fire main pipes and hydrants shall be so placed that the fire hoses may be easily coupled to them;
 - (c) the arrangement of pipes and hydrants shall be such as to avoid the possibility of freezing;
 - (d) suitable drainage provisions shall be provided for fire main piping; and
 - (e) isolation valves shall be installed for all open deck fire main branches used for purposes other than fire fighting.
- (4) The arrangements for the ready availability of water supply shall be-
 - (a) ships of 1,000 gross tonnage and upwards such that at least one effective jet of water is immediately available from any hydrant in an interior location and so as to ensure the continuation of the output of water by the automatic starting of one required fire pump;
 - (b) ships of less than 1,000 gross tonnage by automatic start of at least one fire pump or by remote starting from the navigation bridge of at least one fire pump. If the pump starts automatically or if the bottom valve cannot be opened from where the pump is remotely started, the bottom valve shall always be kept open; and
 - (c) if fitted with periodically unattended machinery space the Administration shall determine provisions for fixed water fire-extinguishing arrangements for such spaces equivalent to those required for normally attended machinery spaces.
- (5) The diameter of the fire main and water service pipes shall be sufficient for the effective distribution of the maximum required discharge from two fire pumps operating simultaneously.
- (6) Isolating valves, emergency fire pumps and their associated arrangements shall comply with the following provisions-
 - (a) isolating valves which separate the section of the fire main within the machinery space containing the main fire pump or pumps from the rest of the fire main shall be fitted in an easily accessible and tenable position outside the machinery spaces;
 - (b) the fire main shall be so arranged that when the isolating valves are shut all the hydrants on the ship, except those in the machinery space referred to

- above, can be supplied with water by another fire pump or an emergency fire pump;
- (c) subject to paragraph (d), the emergency fire pump, its seawater inlet, and suction and delivery pipes and isolating valves shall be located outside the machinery space;
 - (d) if the arrangement referred to in paragraph (c) cannot be complied with, the sea-chest may be fitted in the machinery space if the valve is remotely controlled from a position in the same compartment as the emergency fire pump and the suction pipe is as short as practicable; and
 - (e) short lengths of suction or discharge piping may penetrate the machinery space, provided such pipes-
 - (i) are enclosed in a substantial steel casing or are insulated to "A-60" class standards;
 - (ii) have substantial wall thickness, but in no case less than 11 millimetres; and
 - (iii) shall be welded except for the flanged connection to the sea inlet valve.
- (7) A valve shall be fitted to serve each fire hydrant so that any fire hose may be removed while the fire pumps are in operation.
- (8) Relief valves shall be provided in conjunction with fire pumps if the pumps are capable of developing a pressure exceeding the design pressure of the water service pipes, hydrants and hoses. These valves shall be so placed and adjusted as to prevent excessive pressure in any part of the fire main system.
- (9) The number and position of hydrants shall be such that at least two jets of water not emanating from the same hydrant, one of which shall be from a single length of hose, may reach any part of the ship normally accessible, when the ship is being navigated, to the passengers or crew.
- (10) In addition to the requirements in subsection (9), ships shall comply with the following-
- (a) in the accommodation, service and machinery spaces, the number and position of hydrants shall be such that the requirements of subsection (9) may be complied with when all watertight doors and all doors in main vertical zone bulkheads are closed; and
 - (b) where access is provided to a machinery space of category A at a low level from an adjacent shaft tunnel, two hydrants shall be provided external to, but near the entrance to, that machinery space. Where such access is provided from other spaces, in one of those spaces two hydrants shall be provided near the entrance to the machinery space of category A. Such provision need not be made where the tunnel or adjacent spaces are not part of the escape route.
- (11) With the two pumps simultaneously delivering water through the nozzles specified in subsection (22), with the quantity of water as specified in subsection (5),

through any adjacent hydrants, the following minimum pressures shall be maintained at all hydrants-

Gross Tonnage	Minimum Pressure
4000 and upwards	0.40 N/mm ²
Less than 4000	0.30 N/mm ²

provided that the maximum pressure at any hydrant shall not exceed that at which the effective control of a fire hose can be demonstrated.

- (12) Ships of 500 gross tonnage and upwards shall be provided with at least one international shore connection complying with the Fire Safety Systems Code.
- (13) Facilities shall be available enabling such a connection to be used on either side of the ship.
- (14) *Sanitary, ballast, bilge or general service pumps may be accepted as fire pumps, provided that they are not normally used for pumping oil.*
- (15) Ships shall be provided with independently driven fire pumps as follows:

Gross Tonnage	No. of Pumps
4000 and upwards	At least three
Less than 4000	At least two

- (16) The arrangement of sea connections, fire pumps and their sources of power shall be as to ensure that:
- (a) in ships of 1,000 gross tonnage and upwards, in the event of a fire in any one compartment, all the fire pumps will not be put out of action; and
- (b) in ships of less than 1,000 gross tonnage, if a fire in any one compartment could put all the pumps out of action, there shall be an alternative means consisting of an emergency fire pump complying with the provisions of the Fire Safety Systems Code with its source of power and sea connection located outside the space where the main fire pumps or their sources of power are located.
- (17) The space containing the emergency fire pump shall not be contiguous to the boundaries of machinery spaces of category A or those spaces containing main fire pumps; provided that where this is not practicable, the common bulkhead between the two spaces shall be insulated to a standard of structural fire protection equivalent to that required for a control station.
- (18) No direct access shall be permitted between the machinery space and the space containing the emergency fire pump and its source of power, provided that-
- (a) when this is impracticable, the Administration may accept an arrangement where the access is by means of an airlock with the door of the machinery space being of "A-60" class standard and the other door being at least steel, both reasonably gastight, self-closing and without any hold-back arrangements;

- (b) alternatively, the access may be through a watertight door capable of being operated from a space remote from the machinery space and the space containing the emergency fire pump and unlikely to be cut off in the event of fire in those spaces; and
 - (c) a second means of access to the space containing the emergency fire pump and its source of power shall be provided.
- (19) Ventilation arrangements to the space containing the independent source of power for the emergency fire pump shall be such as to preclude, as far as practicable, the possibility of smoke from a machinery space fire entering or being drawn into that space.
- (20) The required fire pumps shall be capable of delivering for fire-fighting purposes a quantity of water not less than two thirds of the quantity required to be dealt with by the bilge pumps when employed for bilge pumping at the pressure specified in subsection (11).
- (21) Each of the required fire pumps shall-
 - (a) have a capacity not less than 80% of the total required capacity divided by the minimum number of required fire pumps, but in any case not less than 25 m³/h and each such pump shall in any event be capable of delivering at least the two required jets of water;
 - (b) be capable of supplying the fire main system under the required conditions, and where more pumps than the minimum of required pumps are installed, such additional pumps shall have a capacity of at least 25m³/h and shall be capable of delivering at least the two jets of water required in subsection (9).
- (22) Fire hoses shall-
 - (a) be of non-perishable material approved by the Administration;
 - (b) be sufficient in length to project a jet of water to any of the spaces in which they may be required to be used;
 - (c) each be provided with a nozzle and the necessary couplings;
 - (d) where specified in this Chapter as "fire hoses", be kept ready for use in conspicuous positions near the water service hydrants or connections, together with any necessary fittings and tools; and
 - (e) have a length of at least 10 metres, but not more than-
 - (i) 15 metres in machinery spaces; and
 - (ii) 20 metres in other spaces and open decks.
- (23) Unless one hose and nozzle is provided for each hydrant in the ship, there shall be complete interchangeability of hose couplings and nozzles.
- (24) Ships shall be provided with fire pumps, fire mains, hydrants and hoses complying with the applicable requirements of this section.

- (25) There shall be at least one fire hose for each of the hydrants required by subsections (9) and (10) and these hoses shall be used only for the purposes of extinguishing fires or testing the fire-extinguishing apparatus at fire drills and surveys.
- (26) Standard nozzle sizes shall be 12 millimetres, 16 millimetres and 19 millimetres or as near thereto as possible provided that larger diameter nozzles may be permitted at the discretion of the Administration.
- (27) For accommodation and service spaces, a nozzle size greater than 12 millimetres need not be used.
- (28) For machinery spaces and exterior locations, the nozzle size shall be such as to obtain the maximum discharge possible from two jets at the pressure prescribed in subsection (11) from the smallest pump, provided that a nozzle size greater than 19 millimetres need not be used.
- (29) Nozzles shall be of an approved dual-purpose type (i.e. spray/jet type) incorporating a shutoff.

Portable fire extinguishers

- (30) Portable fire extinguishers shall comply with the requirements of the Fire Safety Systems Code.
- (31) Accommodation spaces, service spaces and control stations shall be provided with portable fire extinguishers of appropriate types and in sufficient number to the satisfaction of the Administration; ships of 1,000 gross tonnage and upwards shall carry at least five portable fire extinguishers.
- (32) One of the portable fire extinguishers intended for use in any space shall be stowed near the entrance to that space.
- (33) Carbon dioxide fire extinguishers shall not be placed in accommodation spaces. In control stations and other spaces containing electrical or electronic equipment or appliances necessary for the safety of the ship, fire extinguishers shall be provided whose extinguishing media are neither electrically conductive nor harmful to the equipment and appliances.
- (34) Fire extinguishers shall be situated ready for use at easily visible places, which can be reached quickly and easily at any time in the event of a fire, and in such a way that their serviceability is not impaired by the weather, vibration or other external factors and portable fire extinguishers shall be provided with devices which indicate whether they have been used.
- (35) Spare charges shall be provided for 100% of the first ten extinguishers and 50% of the remaining fire extinguishers capable of being recharged on board provided that not more than sixty total spare charges are required; instructions for recharging shall be carried on board.

- (36) For fire extinguishers which cannot be recharged on board, additional portable fire extinguishers of the same quantity, type, capacity and number as determined in subsection (35) above shall be provided in lieu of spare charges.

Fixed fire-extinguishing systems

- (37) A fixed fire-extinguishing system required by subsection (44) below may be any of the following systems-
- (a) a fixed gas fire-extinguishing system complying with the provisions of the Fire Safety Systems Code;
 - (b) a fixed high-expansion foam fire-extinguishing system complying with the provisions of the Fire Safety Systems Code; and
 - (c) a fixed pressure water-spraying fire-extinguishing system complying with the provisions of the Fire Safety Systems Code.
- (38) Where a fixed fire-extinguishing system not required by this Chapter is installed, it shall meet the requirements of the relevant requirements of this Chapter and the Fire Safety Systems Code.
- (39) Fire-extinguishing systems using Halon 1211, 1301, and 2402 and perfluorocarbons shall be prohibited.
- (40) In general, the Administration shall not permit the use of steam as a fire-extinguishing medium in fixed fire-extinguishing systems.
- (41) Where a fixed gas fire-extinguishing system is used, openings which may admit air to, or allow gas to escape from, a protected space shall be capable of being closed from outside the protected space.
- (42) When the fire-extinguishing medium is stored outside a protected space the storage shall comply with the following provisions³¹-
- (a) the medium shall be stored in a room which is located behind the forward collision bulkhead, and is used for no other purposes;
 - (b) any entrance to such a storage room shall preferably be from the open deck and shall be independent of the protected space;
 - (c) where the storage space is located below deck, it shall be located no more than one deck below the open deck and shall be directly accessible by a stairway or ladder from the open deck;
 - (d) spaces which are located below deck or spaces where access from the open deck is not provided shall be fitted with a mechanical ventilation system designed to take exhaust air from the bottom of the space and shall be sized to provide at least 6 air changes per hour;
 - (e) access doors shall open outwards, and bulkheads and decks, including doors and other means of closing any opening therein, which form the

³¹ See also interpretation of SOLAS II-2 Regulation 10.4.3 in MSC/Circ.1120

boundaries between such rooms and adjacent enclosed spaces shall be gastight; and

- (f) for the purpose of the application of tables 6.1 and 6.2, such storage rooms shall be treated as control stations.
- (43) Pumps, other than those serving the fire main, required for the provision of water for fire-extinguishing systems required by this Chapter, their sources of power and their controls shall be installed outside the space or spaces protected by such systems and shall be so arranged that a fire in the space or spaces protected will not put any such system out of action.

Fire-Extinguishing Arrangements in Machinery Spaces

- (44) Machinery spaces of category A shall be provided with any one of the fixed fire-extinguishing systems in subsection (37) and in each case, if the engine-room and boiler room are not entirely separate, or if fuel oil can drain from the boiler room into the engine-room, the combined engine and boiler rooms shall be considered as one compartment.
- (45) There shall be provided in each Machinery space of category A-
- (a) at least one portable foam applicator unit complying with the provisions of the Fire Safety Systems Code;
 - (b) approved fire extinguishers, each of at least 45 litre capacity or equivalent, sufficient in number to enable foam or its equivalent to be directed onto any part of the fuel and lubricating oil pressure systems, gearing and other fire hazards;
 - (c) in addition, there shall be provided a sufficient number of portable foam extinguishers or equivalent which shall be so located that no point in the space is more than 10 metres walking distance from an extinguisher provided that there are at least two such extinguishers in each space.
- (46) Where, in the opinion of the Administration, a fire hazard exists in any machinery space for which no specific provisions for fire-extinguishing appliances are prescribed there shall be provided in, or adjacent to, that space such a number of approved portable fire extinguishers or other means of fire extinction as the Administration may deem sufficient.
- (47) Subject to subsection (48), machinery spaces of category A of any size³² shall, in addition to the fixed fire-extinguishing system required in subsection (44), be protected by an approved type of fixed water-based or equivalent local application fire-extinguishing system, based on the guidelines developed by the IMO³³ and in the case of periodically unattended machinery spaces, the fire-extinguishing system shall have both automatic and manual release capabilities; in the case of continuously manned machinery spaces, the fire-extinguishing system is only required to have a manual release capability.

³² Under SOLAS 74, this provision applies only to machinery spaces of Category A above 500m² in volume.

³³ Refer to the Guidelines for the approval of fixed water-based local application fire fighting systems for use in Category A machinery spaces (MSC/Circ.913).

- (48) *The Administration may dispense with the requirement for a local application fire-extinguishing system as required in subsection (47) in machinery spaces of category A of less than 500m³ volume, taking due cognizance of the type of machinery installed in such space.*
- (49) Fixed local application fire-extinguishing systems are to protect areas such as the following without the necessity of engine shutdown, personnel evacuation, or sealing of the spaces:
- (a) the fire hazard portions of internal combustion machinery;
 - (b) boiler fronts;
 - (c) the fire hazard portions of incinerators; and
 - (d) purifiers for heated fuel oil.
- (50) Activation of any local application system shall comply with the following provisions-
- (a) activation shall give a visual and distinct audible alarm in the protected space and at continuously manned stations;
 - (b) the alarm shall indicate the specific system activated; and
 - (c) the system alarm requirements described within this subsection are in addition to, and not a substitute for, the detection and fire alarm system required elsewhere in this Chapter.

Fire-Extinguishing Arrangements in Control Stations, Accommodation and Service Spaces

- (51) *An automatic sprinkler or water spray system shall be installed as required by section 6.5(10).*
- (52) *A fixed pressure water-spraying fire-extinguishing system complying with the provisions of the Fire Safety Systems Code shall be installed on cabin balconies of ships to which 6.3(18) applies; where furniture and furnishings on such balconies are not as defined in section 6.7(1)(d), subparagraphs (i),(ii), (iii), (vi) and (vii): provided that this section need not apply where it is possible to readily direct a jet of water, for fire fighting purposes, on to such a balcony from the deck immediately above or adjacent and where such balcony is not adjacent to life saving appliances.*
- (53) *Paint lockers shall be protected by either-*
- (a) a carbon dioxide system, designed to give a minimum volume of free gas equal to 40% of the gross volume of the protected space;
 - (b) a dry powder system, designed for at least 0.5 kg powder/m³;
 - (c) a water spraying or sprinkler system, designed for 5 l/m² min. Water spraying systems may be connected to the fire main of the ship; or
 - (d) a system providing equivalent protection, as determined by the Administration.

and in all cases, the system shall be operable from outside the protected space.

- (54) Flammable liquid lockers shall be protected by an appropriate fire-extinguishing arrangement approved by the Administration.
- (55) For lockers of a deck area of less than 4m², which do not give access to accommodation spaces, a portable carbon dioxide fire extinguisher sized to provide a minimum volume of free gas equal to 40% of the gross volume of the space may be accepted in lieu of a fixed system provided that-
- (a) a discharge port shall be arranged in the locker to allow the discharge of the extinguisher without having to enter into the protected space;
 - (b) the required portable fire extinguisher shall be stowed adjacent to the port; and
 - (c) alternatively, a port or hose connection may be provided to facilitate the use of fire main water.
- (56) Deep-fat cooking equipment installed in enclosed spaces or on open decks shall be fitted with the following-
- (a) an automatic or manual fire-extinguishing system tested to an international standard acceptable to the IMO³⁴;
 - (b) a primary and backup thermostat with an alarm to alert the operator in the event of failure of either thermostat;
 - (c) arrangements for automatically shutting off the electrical power upon activation of the fire-extinguishing system;
 - (d) an alarm for indicating operation of the fire-extinguishing system in the galley where the equipment is installed; and
 - (e) controls for manual operation of the fire-extinguishing system which are clearly labelled for ready use by the crew.

Fire-Fighter's Outfits

- (57) Types of fire-fighter's outfits-
- (a) Fire-fighter's outfits shall comply with the Fire Safety Systems Code; and
 - (b) Self-contained compressed air breathing apparatus of fire-fighter's outfits shall comply with paragraph 2.1.2.2 of chapter 3 of the Fire Safety Systems Code by 1 July 2019.
- (58) Ships shall carry-
- (a) at least two fire-fighter's outfits;

³⁴ Refer to the recommendations by the International Organization for Standardization, in particular publication ISO 15371:2009, "Fire-extinguishing systems for protection of galley cooking equipment."

- (b) additionally, for every 80 metres, or part thereof, of the aggregate of the lengths of all passenger spaces and service spaces on the deck which carries such spaces or, if there is more than one such deck, on the deck which has the largest aggregate of such lengths, two fire-fighter's outfits; and
 - (c) two sets of personal equipment, each set comprising the items stipulated in the Fire Safety Systems Code.
- (59) The fire-fighter's outfits or sets of personal equipment shall be kept ready for use in an easily accessible location that is permanently and clearly marked and, where more than one fire-fighter's outfit or more than one set of personal equipment is carried, they shall be stored in widely separated positions.
- (60) The Administration may require additional sets of personal equipment and breathing apparatus, having due regard to the size and layout of the ship.
- (61) Two spare charges shall be provided for each required breathing apparatus. Ships that are equipped with suitably located means for fully recharging the air cylinders free from contamination need carry only one spare charge for each required apparatus.
- (62) A minimum of two two-way portable radiotelephone apparatus for each fire party for fire-fighter's communication shall be carried on board. Those two-way portable radiotelephone apparatus shall be of an explosion-proof type or intrinsically safe. Ships constructed before 1 July 2014 shall comply with the requirements of this subsection not later than the first survey after 1 July 2018.

6.9 *Structural Integrity:*

Purpose

- (1) The purpose of this paragraph is to maintain structural integrity of the ship, preventing partial or whole collapse of the ship structures due to strength deterioration by heat. For this purpose, materials used in the ships' structure shall ensure that the structural integrity is not degraded due to fire.

Material of Hull, Superstructures, Structural Bulkheads, Decks and Deckhouses

- (2) The hull, superstructures, structural bulkheads, decks and deckhouses shall be constructed of steel or other equivalent material and for the purpose of applying the definition of steel or other equivalent material the "applicable fire exposure" shall be according to the integrity and insulation standards given in Tables 6.1 and 6.2; for example, where divisions such as decks or sides and ends of deckhouses are permitted to have "B-0" fire integrity, the "applicable fire exposure" shall be half an hour.

Structure of Aluminium Alloy

- (3) Unless otherwise specified in subsection(2), in cases where any part of the structure is of aluminium alloy, the following shall apply-
- (a) the insulation of aluminium alloy components of "A" or "B" class divisions, except structure which, in the opinion of the Administration, is non-load-bearing, shall be such that the temperature of the structural core does not rise more than 200°C above the ambient temperature at any time during the applicable fire exposure to the standard fire test; and
 - (b) special attention shall be given to the insulation of aluminium alloy components of columns, stanchions and other structural members required to support lifeboat and liferaft stowage, launching and embarkation areas, and "A" and "B" class divisions to ensure-
 - (i) that for such members supporting lifeboat and liferaft areas and "A" class divisions, the temperature rise limitation specified in paragraph (a) above shall apply at the end of one hour; and
 - (ii) that for such members required to support "B" class divisions, the temperature rise limitation specified in the said paragraph (a) shall apply at the end of half an hour.

Machinery Spaces of Category A

- (4) Subject to subsection (5), the boundaries of all machinery spaces of category A, including crowns and casings, shall be of steel construction and shall be insulated as required by Tables 6.1 and 6.2 as appropriate.
- (5) The Administration may permit the boundaries of Category A machinery spaces, including crowns and casings, to be constructed of aluminium provided that-
- (a) the space is provided with an equivalent water-mist fire-extinguishing system complying with MSC/Circ.1165³⁵ that will provide total flooding of the space in the event of a fire in that space; and
 - (b) the space is provided with a fixed local application fire-extinguishing system of the water-mist type in accordance with MSC/Circ.913³⁶, MSC/Circ.1082³⁷ and MSC.1/Circ.1276³⁸, applicable to machinery spaces of any size; and
 - (c) the space and the divisions forming the crowns and casings shall be constructed and insulated to "A-60" class standard on both sides as demonstrated by a fire test conducted in accordance with the relevant provisions of the FTP Code; and
 - (d) where the hull forms part of the boundary of the machinery space then the internal surface of the hull shall be insulated in accordance with

³⁵ Revised Guidelines for the approval of Equivalent Water-Based Fire Extinguishing Systems for Machinery Spaces and Cargo Pump-Rooms, as further amended by MSC.1/Circ.1237.

³⁶ Guidelines for the Approval of Fixed Water-Based Local Application Fire-Fighting Systems for use in Category A Machinery Spaces.

³⁷ Unified Interpretations of the Guidelines for Approval of Fixed Water-Based Local Application Fire-Fighting Systems (MSC/Circ.913).

³⁸ Unified Interpretations of SOLAS Chapter II-2.

paragraph(c) down to at least 450mm below the line of the lightest sea-going draft.

- (6) The floor plating of normal passageways in machinery spaces of Category A shall be constructed of steel.

Materials of Overboard Fittings

- (7) Materials readily rendered ineffective by heat shall not be used for overboard scuppers, sanitary discharges, and other outlets which are close to the waterline and where the failure of the material in the event of fire would give rise to danger of flooding.

6.10 Notification of Crew and Passengers:

Purpose

- (1) The purpose of this paragraph is to notify crew and passengers of a fire for safe evacuation. For this purpose, a general emergency alarm system and a public address system shall be provided.

General Emergency Alarm System

- (2) A general emergency alarm system required by section 7.9(5) shall be used for notifying crew and passengers of a fire.

Public Address Systems

- (3) A public address system or other effective means of communication complying with the requirements of subsection 7.9(6) shall be available throughout the accommodation, service spaces, control stations and open decks.

6.11 Means of Escape:

Purpose

- (1) The purpose of this paragraph is to provide means of escape so that persons on board can safely and swiftly escape to the lifeboat and liferaft embarkation deck. For this purpose, the following functional requirements shall be met:
 - (a) safe escape routes shall be provided;
 - (b) escape routes shall be maintained in a safe condition, clear of obstacles; and
 - (c) additional aids for escape shall be provided as necessary to ensure accessibility, clear marking, and adequate design for emergency situations.

General Requirements

- (2) Unless expressly provided otherwise in this paragraph, at least two widely separated and ready means of escape shall be provided from all spaces or groups of spaces.
- (3) Lifts shall not be considered as forming one of the means of escape as required by this paragraph.

Means of Escape from Control Stations, Accommodation Spaces and Service Spaces

- (4) Stairways and ladders shall be so arranged as to provide ready means of escape to the lifeboat and liferaft embarkation deck from passenger and crew accommodation spaces and from spaces in which the crew is normally employed, other than machinery spaces.
- (5) A corridor, lobby, or part of a corridor from which there is only one route of escape shall be prohibited, provided that-
 - (a) dead-end corridors used in service areas which are necessary for the practical utility of the ship, such as fuel oil stations and athwartship supply corridors, shall be permitted where such dead-end corridors are separated from crew accommodation areas and are inaccessible from passenger accommodation areas; and
 - (b) a part of a corridor that has a depth not exceeding its width is considered a recess or local extension and is permitted.
- (6) All stairways in accommodation and service spaces and control stations shall be of steel frame construction except where the Administration sanctions the use of other equivalent material.
- (7) If a radiotelegraph station has no direct access to the open deck, two means of escape from, or access to, the station shall be provided, one of which may be a porthole or window of sufficient size or other means to the satisfaction of the Administration.
- (8) Doors in escape routes shall, in general, open in way of the direction of escape, except that-
 - (a) individual cabin doors may open into the cabins in order to avoid injury to persons in the corridor when the door is opened; and
 - (b) doors in vertical emergency escape trunks may open out of the trunk in order to permit the trunk to be used both for escape and for access.
- (9) Below the bulkhead deck, two means of escape, at least one of which shall be independent of watertight doors, shall be provided from each watertight compartment or similarly restricted space or group of spaces; provided that, exceptionally, the Administration may dispense with one of the means of escape for crew spaces that are entered only occasionally and where the required escape route is independent of watertight doors.

- (10) Where the Administration has granted dispensation under the provisions of subsection (9), this sole means of escape shall provide safe escape and stairways shall not be less than 800 millimetres in clear width with handrails on both sides.
- (11) Above the bulkhead deck there shall be at least two means of escape from each main vertical zone or similarly restricted space or group of spaces, at least one of which shall give access to a stairway forming a vertical escape.
- (12) *Stairway enclosures including "horizontal stairways" in accommodation and service spaces shall comply with the following provisions-*
- (a) they shall have direct access from the corridors and be of a sufficient area to prevent congestion, having in view the number of persons likely to use them in an emergency;
 - (b) within the perimeter of such stairway enclosures, only public toilets and lockers of non-combustible material providing storage for non-hazardous safety equipment are permitted;
 - (c) direct access to the stairway enclosures shall be permitted only from the following spaces-
 - (i) public spaces;
 - (ii) corridors;
 - (iii) lifts;
 - (iv) public toilets;
 - (v) lockers of non-combustible material providing storage for non-hazardous safety equipment;
 - (vi) other escape stairways required by subsection (13); and
 - (vii) external areas;
 - (d) small corridors or "lobbies" used to separate an enclosed stairway from galleys or laundries may have direct access to the stairway provided they have a minimum deck area of 4.5 m², a width of no less than 900 millimetres and contain a fire hose station.
- (13) At least one of the means of escape required by subsections (9) and (11) shall consist of a readily accessible enclosed stairway which shall comply with the following provisions³⁹ -
- (a) it shall provide continuous fire shelter from the level of its origin to the appropriate lifeboat and liferaft embarkation decks, or to the uppermost weather deck if the embarkation deck does not extend to the main vertical zone being considered;

³⁹ Refer to Unified Interpretations of SOLAS Chapter II-2, the FSS Code, the FTP Code and Related Fire Test Procedures (MSC/Circular.1120)

- (b) where the latter case in paragraph (a) applies, direct access to the embarkation deck by way of external open stairways and passageways shall be provided and shall have emergency lighting in accordance with section 7.14 and slip-free surfaces underfoot; and
 - (c) boundaries facing external open stairways and passageways forming part of an escape route and boundaries in such a position that their failure during a fire would impede escape to the embarkation deck shall have fire integrity, including insulation values, in accordance with subsection 6.7(46).
- (14) Protection of access from the stairway enclosures to the lifeboat and liferaft embarkation areas shall be provided either directly or through protected internal routes which have fire integrity and insulation values for stairway enclosures as determined by Tables 6.1 and 6.2, as appropriate.
- (15) Stairways serving only a space and a balcony in that space shall not be considered as forming one of the required means of escape.
- (16) Each level within an atrium shall have two means of escape, one of which shall give direct access to an enclosed vertical means of escape meeting the requirements of subsection (13).
- (17) The widths, number and continuity of escapes shall be in accordance with the requirements in the Fire Safety Systems Code.
- (18) *In addition to the emergency lighting supplied by the emergency source of electrical power, the means of escape, including stairways and exits, shall comply with the following provisions⁴⁰⁴¹ -*
- (a) *subject to paragraph (b) shall be marked by lighting or photoluminescent strip indicators placed not more than 300 mm above the deck at all points of the escape route including angles and intersections such that the marking enables passengers to identify the routes of escape and readily identify the escape exits;*
 - (b) *alternative means of achieving safe escape other than lighting and or photoluminescent strips may be considered by the Administration where such alternative provides the same level of efficiency*
 - (c) *the marking or alternative means of achieving escape must enable passengers to identify the routes of escape and readily identify the escape exits;*
 - (d) *all electrically operated systems shall be operated from the navigation bridge or continuously manned Central Control Station and supplied by the emergency source of power;*
 - (e) *lighting shall be so arranged that the failure of any single component will not result in the system or any part thereof being rendered ineffective;*

⁴⁰ See also MSC/Circular.1168 - Interim Guidelines for the Testing, Approval and Maintenance of Evacuation Guidance Systems Used as an Alternative to Low-Location Lighting Systems.

⁴¹ Refer to the Revised Guidelines for Passenger Ship Safety Instructions MSC/Circ.699

- (f) *additionally, escape route signs and fire equipment location markings shall be of photoluminescent material or marked by lighting; and*
 - (g) *the Administration shall ensure that such lighting or photoluminescent equipment used in compliance with this subsection has been evaluated, tested and applied in accordance with the Fire Safety Systems Code.*
- (19) Cabin and stateroom doors shall not require keys to unlock them from inside the room. Neither shall there be any doors along any designated escape route which require keys to unlock them when moving in the direction of escape.
- (20) *Escape doors from public spaces that are normally latched shall be fitted with a means of quick release arrangement consisting of a door-latching mechanism incorporating a device that releases the latch upon the application of a force in the direction of escape flow; such quick release mechanisms shall be designed and installed to the satisfaction of the Administration⁴². Power operated sliding doors should also comply with 6.7(35) (h), (i), (m) & (n).*
- (21) At least two emergency escape breathing devices shall be carried in each main vertical zone.
- (22) Emergency escape breathing devices shall comply with the Fire Safety Systems Code. Spare emergency escape breathing devices shall be kept on board.

Means of Escape from Machinery Spaces

- (23) Where the space is below the bulkhead deck, the two means of escape shall consist of either-
- (a) two sets of steel ladders, as widely separated as possible, leading to doors in the upper part of the space, similarly separated and from which access is provided to the appropriate lifeboat and liferaft embarkation decks, provided that-
 - (i) one of these ladders shall be located within a protected enclosure that satisfies category (4), as appropriate, from the lower part of the space it serves to a safe position outside the space;
 - (ii) self-closing fire doors of the same fire integrity standards shall be fitted in the enclosure;
 - (iii) the ladder shall be fixed in such a way that heat is not transferred into the enclosure through non-insulated fixing points; and
 - (iv) the protected enclosure shall have minimum internal dimensions of at least 800 millimetres x 800 millimetres, and shall have emergency lighting provisions; or

⁴² Further requirements for quick release mechanisms are provided for in SOLAS 74 but are not applicable to yachts to which the Code applies due to the fact that the Code limits the total number of persons on board to a maximum of 99 and hence the number of persons (passengers and crew) expected to be situated in such locations is limited.

- (b) one steel ladder leading to a door in the upper part of the space from which access is provided to the embarkation deck and additionally, in the lower part of the space and in a position well separated from the ladder referred to, a steel door capable of being operated from each side and which provides access to a safe escape route from the lower part of the space to the embarkation deck.
- (24) Subject to subsection (25), where the space is above the bulkhead deck, the two means of escape shall be as widely separated as possible and the doors leading from such means of escape shall be in a position from which access is provided to the appropriate lifeboat and liferaft embarkation decks and where such means of escape require the use of ladders, these shall be of steel.
- (25) The Administration may dispense with one of the means of escape required under subsection (23) & (24) under the following conditions-
 - (a) in a ship of less than 1,000 gross tonnage due regard being paid to the width and disposition of the upper part of the space;
 - (b) *in a ship of 1,000 gross tonnage and above where either a door or a steel ladder provides a safe escape route to the embarkation deck, due regard being paid to the nature and location of the space and whether persons are normally employed in that space and a space may include a normally unattended auxiliary machinery space.*
- (26) Two means of escape shall be provided from- a machinery control room located within a machinery space, at least one of which will provide continuous fire shelter to a safe position outside the machinery space.
- (27) In the steering gear space, a second means of escape shall be provided when the emergency steering position is located in that space unless there is direct access to the open deck.
- (28) On all ships, within the machinery spaces, emergency escape breathing devices which comply with the Fire Safety Systems Code shall be situated ready for use at easily visible places, which can be reached quickly and easily at any time in the event of fire and the number and location of such devices shall be to the satisfaction of the Administration and shall take into account the layout of the machinery spaces and the number of persons normally working in the spaces.
- (29) The number and location of the emergency escape breathing devices required under subsection (28) shall be indicated in the fire control plan.
- (30) All inclined ladders/stairways fitted to comply with subsection (23) with open treads in machinery spaces being part of or providing access to escape routes but not located within a protected enclosure shall be made of steel. Such ladders/stairways shall be fitted with steel shields attached to their undersides, such as to provide escaping personnel protection against heat and flame from beneath.

Escape from main workshops within machinery spaces

- (31) Two means of escape shall be provided from the main workshop within a machinery space. At least one of these escape routes shall provide a continuous fire shelter to a safe position outside the machinery space.

6.12 Operational Readiness and Maintenance:*Purpose*

- (1) The purpose of this paragraph is to maintain and monitor the effectiveness of the fire safety measures the ship is provided with. For this purpose, the following functional requirements shall be met-
- (a) fire protection systems and fire-fighting systems and appliances shall be maintained ready for use; and
 - (b) fire protection systems and fire-fighting systems and appliances shall be properly tested and inspected.

General Requirements

- (2) At all times while the ship is in service, the requirements of subsection 6.12(1)(a) shall be complied with and a ship is not in service when-
- (a) it is in for repairs or lay-up (either at anchor or in port) or in dry-dock;
 - (b) it is declared not in service by the owner or the owner's representative; or
 - (c) there are no passengers on board.
- (3) The following fire protection systems shall be kept in good order so as to ensure their required performance if a fire occurs-
- (a) structural fire protection, including fire-resisting divisions, and protection of openings and penetrations in these divisions;
 - (b) fire detection and fire alarm systems; and
 - (c) means of escape systems and appliances.
- (4) Fire-fighting systems and appliances shall be kept in good working order and readily available for immediate use. Portable extinguishers which have been discharged shall be immediately recharged or replaced with an equivalent unit.
- (5) Maintenance, testing and inspections shall be carried out based on the guidelines developed by the IMO⁴³ and in a manner having due regard to ensuring the reliability of fire-fighting systems and appliances.

⁴³ Refer to the revised guidelines for the on maintenance and inspection of fire protection systems and appliances (MSC.1/ Circ1432).

- (6) The maintenance plan shall be kept on board the ship and shall be available for inspection whenever required by the Administration.
- (7) The maintenance plan which may be computer based shall include at least the following fire protection systems and fire-fighting systems and appliances, where installed-
 - (a) fire mains, fire pumps and hydrants, including hoses, nozzles and international shore connections;
 - (b) fixed fire detection and fire alarm systems;
 - (c) fixed fire-extinguishing systems and other fire-extinguishing appliances;
 - (d) automatic sprinkler, fire detection and fire alarm systems;
 - (e) ventilation systems, including fire and smoke dampers, fans and their controls;
 - (f) emergency shutdown of fuel supply;
 - (g) fire doors, including their controls;
 - (h) general emergency alarm systems;
 - (i) emergency escape breathing devices;
 - (j) portable fire extinguishers, including spare charges; and
 - (k) fire-fighter's outfits.

6.13 Instructions, On-board Training and Drills:

Purpose

- (1) The purpose of this paragraph is to mitigate the consequences of fire by means of proper instructions for training and drills of persons on board in correct procedures under emergency conditions and for this purpose, the crew shall have the necessary knowledge and skills to handle fire emergency cases, including passenger care.

General Requirements

- (2) Crew members shall receive instruction on fire safety on board the ship.
- (3) Crew members shall receive instructions on their assigned duties.
- (4) Parties responsible for fire extinguishing shall be organised and such parties shall have the capability to complete their duties at all times while the ship is in service.
- (5) Crew members shall be trained to be familiar with the arrangements of the ship as well as the location and operation of any fire-fighting systems and appliances that they may be called upon to use.
- (6) Training in the use of the emergency escape breathing devices shall be considered as part of on-board training.

- (7) Performance of crew members' assigned fire-fighting duties shall be periodically evaluated by conducting on-board training and drills to identify areas in need of improvement, to ensure competency in fire-fighting skills is maintained, and to ensure the operational readiness of the fire-fighting organisation.
- (8) On-board training in the use of the ship's fire-extinguishing systems and appliances shall be planned and conducted in accordance with the provisions of section 7.17(17).
- (9) Fire drills shall be conducted and recorded in accordance with the provisions of section 7.17.
- (10) A training manual shall be provided in each crew mess room and recreation room or in each crew cabin.
- (11) The training manual shall be written in the working language of the ship.
- (12) The training manual, which may comprise several volumes, shall contain the instructions and information required in subsection (13) in easily understood terms and illustrated wherever possible; any part of such information may be provided in the form of audio-visual aids in lieu of the manual.
- (13) The training manual shall explain the following in detail-
 - (a) general fire safety practice and precautions related to the dangers of smoking, electrical hazards, flammable liquids and similar common shipboard hazards;
 - (b) general instructions on fire-fighting activities and fire-fighting procedures, including procedures for notification of a fire and use of manually operated call points;
 - (c) meanings of the ship's alarms;
 - (d) operation and use of fire-fighting systems and appliances;
 - (e) operation and use of fire doors;
 - (f) operation and use of fire and smoke dampers; and
 - (g) escape systems and appliances.
- (14) General arrangement plans⁴⁴ shall be permanently exhibited for the guidance of the ship's officers, showing clearly for each deck the control stations, the various fire sections enclosed by "A" class divisions, the sections enclosed by "B" class divisions together with particulars of the fire detection and fire alarm systems, the sprinkler installation, the fire-extinguishing appliances, means of access to different compartments, decks, etc., and the ventilating system, including particulars of the fan control positions, the position of dampers and identification numbers of the ventilating fans serving each section; provided that as an

⁴⁴ Refer to Graphical symbols for fire control plans, adopted by the IMO by Resolution A.654(16) and Resolution A.952(23) - Graphical Symbols for Shipboard Fire Control Plans for ships constructed on or after 041 January 2004.

alternative, at the discretion of the Administration, the aforementioned details may be set out in a booklet, a copy of which shall be supplied to each officer, and one copy shall at all times be available on board in an accessible position and in any case plans and booklets shall be kept up to date; any alterations thereto shall be recorded as soon as practicable and the description in such plans and booklets shall be in English.

- (15) A duplicate set of fire control plans or a booklet containing such plans shall be permanently stored in a prominently marked weathertight enclosure outside the deckhouse for the assistance of shore-side fire-fighting personnel⁴⁵.
- (16) In addition to the requirement of section 7.17, fire drills shall be conducted in accordance with the provisions of section 7.18 of the Code having due regard to notification of passengers and movement of passengers to assembly stations and embarkation decks.
- (17) An onboard means of recharging breathing apparatus cylinders used during drills shall be provided or a suitable number of spare cylinders shall be carried on board to replace those used.

6.14 Operations:

Purpose

- (1) The purpose of this paragraph is to provide information and instructions for proper ship handling operations in relation to fire safety and for this purpose, fire safety operational booklets shall be provided on board.
- (2) The required fire safety operational booklet shall contain the necessary information and instructions for the safe operation of the ship in relation to fire safety and the booklet shall include information concerning the crew's responsibilities for the general fire safety of the ship at all times.
- (3) The fire safety operational booklet shall be in the working language of the ship and shall be provided in each crew mess room and recreation room or in each crew cabin.
- (4) The fire safety operational booklet may be combined with the training manuals required in subsection section 6.13(10).

⁴⁵ Refer to the Guidance concerning the location of fire control plans for assistance of shoreside fire-fighting personnel (MSC/Circ.451).

6.15 Alternative Design and Arrangements:*Purpose*

- (1) The purpose of this paragraph is to provide a methodology for alternative design and arrangements for fire safety.

General

- (2) Fire safety design and arrangements may deviate from the prescriptive requirements set out in this Chapter, provided that the design and arrangements meet the fire safety objectives and the functional requirements.
- (3) When fire safety design or arrangements deviate from the prescriptive requirements of this Chapter, engineering analysis, evaluation and approval of the alternative design and arrangements shall be carried out in accordance with this paragraph.

Engineering Analysis

- (4) The engineering analysis shall be prepared and submitted to the Administration, based on the guidelines developed by the IMO⁴⁶, and shall include, as a minimum, the following elements-
 - (a) determination of the ship type and space(s) concerned;
 - (b) identification of prescriptive requirement(s) with which the ship or the space(s) will not comply;
 - (c) identification of the fire and explosion hazards of the ship or the space(s) concerned, including:
 - (i) identification of the possible ignition sources;
 - (ii) identification of the fire growth potential of each space concerned;
 - (iii) identification of the smoke and toxic effluent generation potential for each space concerned;
 - (iv) identification of the potential for the spread of fire, smoke or of toxic effluents from the space(s) concerned to other spaces;
 - (d) determination of the required fire safety performance criteria for the ships or the space(s) concerned addressed by the prescriptive requirement(s), in particular-
 - (i) performance criteria shall be based on the fire safety objectives and on the functional requirements of this Chapter;
 - (ii) performance criteria shall provide a degree of safety not less than that achieved by using the prescriptive requirements; and
 - (iii) performance criteria shall be quantifiable and measurable;

⁴⁶ Refer to the Guidelines on alternative design and arrangements for Fire Safety (MSC/Circ.1002).

- (e) detailed description of the alternative design and arrangements, including a list of the assumptions used in the design and any proposed operational restrictions or conditions; and
- (f) technical justification demonstrating that the alternative design and arrangements meet the required fire safety performance criteria.

Evaluation of Alternative Design and Arrangements

- (5) The engineering analysis required in subsection (4) shall be evaluated and approved by the Administration, taking into account the guidelines developed by the IMO.⁴⁷
- (6) A copy of the documentation, as approved by the Administration, indicating that the alternative design and arrangements comply with this paragraph shall be carried on board the ship.

Exchange of Information

- (7) The Administration shall communicate to the IMO pertinent information concerning alternative design and arrangements approved by them for circulation to all Contracting Governments.

Re-evaluation due to Change of Conditions

- (8) If the assumptions and operational restrictions that were stipulated in the alternative design and arrangements are changed, the engineering analysis shall be carried out under the changed condition and shall be approved by the Administration.

6.16 Helicopter Facilities:

Purpose

- (1) The purpose of this regulation is to provide additional measures in order to address the fire safety objectives of this chapter for ships fitted with special facilities for helicopters and for this purpose, the following functional requirements shall be met-
 - (a) helideck structure must be adequate to protect the ship from the fire hazards associated with helicopter operations;
 - (b) fire-fighting appliances shall be provided to adequately protect the ship from the fire hazards associated with helicopter operations; refuelling and hangar facilities and operations shall provide the necessary measures to protect the ship from the fire hazards associated with helicopter operations; and
 - (c) operation manuals and training shall be provided.

⁴⁷ Refer to the Guidelines on alternative design and arrangements for fire safety (MSC/Circ.1002).

Application

- (2) *This section applies to all passenger yachts to which the Code applies and on which helicopter operations take place and the provisions of this section are to be read and applied in conjunction with the applicable requirements and guidance relating to Helicopter Landing Areas contained in Annex 2 to the Code.*
- (3) In addition to complying with the applicable requirements of sections 6.1 to 6.15 ships equipped with helidecks shall comply with the requirements of this section.
- (4) Where helicopters land or conduct winching operations on an occasional or emergency basis on ships without helidecks, fire-fighting equipment fitted in accordance with the requirements of section 6.8 may be used and this equipment shall be made readily available in close proximity to the landing or winching areas during helicopter operations.

Structure-Steel or other Equivalent Material

- (5) *In general, the construction of the helidecks shall be of steel or other equivalent materials. The underside of the Helideck in way of all enclosed spaces is to be insulated to A-60 Class Standard'*

Structure-Aluminium or other Low Melting Point Metals

- (6) If the Administration permits aluminium or other low melting point metal construction that is not made equivalent to steel, the following provisions shall be satisfied-
 - (a) if the platform is cantilevered over the side of the ship, after each fire on the ship or on the platform, the platform shall undergo a structural analysis to determine its suitability for further use; and
 - (b) if the platform is located above the ship's deckhouse or similar structure, the following conditions shall be satisfied-
 - (i) the deckhouse top and bulkheads under the platform shall have no openings;
 - (ii) windows under the platform shall be provided with steel shutters; and
 - (iii) after each fire on the platform or in close proximity, the platform shall undergo a structural analysis to determine its suitability for further use.

Means of Escape

- (7) A helideck shall be provided with both a main and an emergency means of escape and access for fire fighting and rescue personnel. These shall be located as far apart from each other as is practicable and preferably on opposite sides of the helideck.

Fire Fighting Appliances

- (8) The following fire-fighting appliances shall be provided in close proximity to the helideck and stored near the means of access to that helideck-
- (a) at least two dry powder extinguishers having a total capacity of not less than 45 kg;
 - (b) carbon dioxide extinguishers of a total capacity of not less than 18 kg or equivalent;
 - (c) a suitable foam application system consisting of monitors or foam making branch pipes capable of delivering foam to all parts of the helideck in all weather conditions in which helicopters can operate and which shall be capable of delivering a discharge rate as required in Table 6.3 for at least five minutes;
 - (d) the principal agent shall be suitable for use with salt water and conform to performance standards not inferior to those acceptable to the IMO⁴⁸;
 - (e) at least two nozzles of an approved dual-purpose type (jet/spray) and hoses sufficient to reach any part of the helideck;
 - (f) in addition to the requirements of subsection 6.8(57), two sets of fire-fighter's outfits; and
 - (g) at least the following equipment shall be stored in a manner that provides for immediate use and protection from the elements-
 - (i) adjustable wrench
 - (ii) blanket, fire resistant;
 - (iii) cutters, bolt, 60 cm;
 - (iv) hook, grab or salving;
 - (v) hacksaw, heavy duty complete with 6 spare blades;
 - (vi) ladder;
 - (vii) lift line 5 mm diameter × 15 m in length;
 - (viii) pliers, side-cutting;
 - (ix) set of assorted screwdrivers; and
 - (x) harness knife complete with sheath.

Table 6.3 Foam discharge rates

Category	Helicopter overall length	Discharge rate foam solution (l/min)
H1	up to but not including 15m	250
H2	from 15m up to but not	500

⁴⁸ Refer to the *International Civil Aviation Organization Airport Services Manual*, part 1, Rescue and Fire Fighting, chapter 8, Extinguishing Agent Characteristics, Paragraph 8.1.5, Foam Specifications table 8-1, Level "B".

	including 24m	
H3	from 24m up to but not including 35m	800

Drainage Facilities

- (9) Drainage facilities in way of helidecks shall be constructed of steel and shall lead directly overboard independent of any other system and shall be designed so that drainage does not fall onto any part of the ship.

Helicopter Re-fuelling and Hangar facilities

- (10) Where the ship has helicopter refuelling and hangar facilities, the following requirements shall be complied with-
- (a) a designated area shall be provided for the storage of fuel tanks which shall be-
 - (i) as remote as is practicable from accommodation spaces, escape routes and embarkation stations; and
 - (ii) isolated from areas containing a source of vapour ignition.
 - (b) the fuel storage area shall be provided with arrangements whereby fuel spillage may be collected and drained to a safe location;
 - (c) tanks and associated equipment shall be protected against physical damage and from a fire in an adjacent space or area;
 - (d) where portable fuel storage tanks are used, special attention shall be given to-
 - (i) design of the tank for its intended purpose;
 - (ii) mounting and securing arrangements;
 - (iii) electric bonding; and
 - (iv) inspection procedures;
 - (e) storage tank fuel pumps shall be provided with means which permit shutdown from a safe remote location in the event of a fire and where a gravity fuelling system is installed, equivalent closing arrangements shall be provided to isolate the fuel source;
 - (f) the fuel pumping unit shall be connected to one tank at a time and the piping between the tank and the pumping unit shall be of steel or equivalent material, as short as possible, and protected against damage;
 - (g) electrical fuel pumping units and associated control equipment shall be of a type suitable for the location and potential hazards;
 - (h) fuel pumping units shall incorporate a device which will prevent over-pressurization of the delivery or filling hose;
 - (i) equipment used in refuelling operations shall be electrically bonded;
 - (j) "NO SMOKING" signs shall be displayed at appropriate locations;

- (k) hangar, refuelling and maintenance facilities shall be treated as category 'A' machinery spaces with regard to structural fire protection, fixed fire-extinguishing and detection system requirements;
- (l) enclosed hangar facilities or enclosed spaces containing refuelling installations shall be provided with mechanical ventilation, as required by section 6.17(3) for garage spaces and ventilation fans shall be of non-sparking type; and
- (m) electric equipment and wiring in enclosed hangar or enclosed spaces containing refuelling installations shall also comply with requirements of section 6.17(9).

Operational Manual and Fire Fighting Service

- (11) Each helicopter facility shall have an operations manual, including a description and a checklist of safety precautions, procedures and equipment requirements. This manual may be part of the ship's emergency response procedures.
- (12) The procedures and precautions to be followed during refuelling operations shall be in accordance with recognized safe practices and contained in the operations manual.
- (13) Fire-fighting personnel, consisting of at least two persons trained for rescue and fire-fighting duties, and fire-fighting equipment shall be immediately available at all times when helicopter operations are expected.
- (14) On-board refresher training shall be carried out and additional supplies of fire-fighting media shall be provided for training and testing of the equipment.

6.17 Protection of Garage Spaces:

Purpose

- (1) *The purpose of this paragraph is to provide additional safety measures in order to address the fire safety objectives of this Chapter for ships fitted with garage spaces and for this purpose, the following functional requirements shall be met:*
 - (a) *fire protection systems shall be provided to adequately protect the ship from the fire hazards associated with garage spaces;*
 - (b) *sources of ignition shall be separated from garage spaces; and*
 - (c) *garage spaces shall be adequately ventilated.*

Application

- (2) *In addition to complying with the requirements of this Chapter, as appropriate, garage spaces shall also comply with the requirements of this paragraph.*

Measures

- (3) *There shall be provided an effective power ventilation system sufficient to give at least 6 air changes per hour, except as provided in subsection (21) where there shall be at least 10 air changes per hour, which shall comply with the following provisions-*
- (a) *it shall be separate from other ventilation systems and shall be in operation at all times;*
 - (b) *ventilation ducts serving such spaces capable of being effectively sealed shall be separated for each such space; and*
 - (c) *the system shall be capable of being controlled from a position outside such spaces.*
- (4) *The ventilation system shall be such as to prevent air stratification and the formation of air pockets.*
- (5) *Means shall be provided on the navigation bridge to indicate any loss of the required ventilating capacity.*
- (6) *Arrangements shall be provided to permit a rapid shutdown and effective closure of the ventilation system from outside of the space in case of fire, taking into account the weather and sea conditions.*
- (7) *Ventilation ducts, including dampers, shall be made of steel and ventilation ducts that pass through other horizontal zones or machinery spaces shall be "A-60" class steel ducts.*
- (8) *Permanent openings in the side plating, the ends or deckhead of the space shall be so situated that a fire in the garage space does not endanger stowage areas and embarkation stations for survival craft and rescue boats where no lifeboats are carried and accommodation spaces, service spaces and control stations in superstructures and deckhouses above the garage spaces.*
- (9) *Except as provided in subsection (21), electrical equipment and wiring shall be of a type suitable for use in an explosive petrol and air mixture.⁴⁹*
- (10) *Electrical equipment and wiring, if installed in an exhaust ventilation duct, shall be of a type approved for use in explosive petrol and air mixtures and the outlet from any exhaust duct shall be sited in a safe position, having regard to other possible sources of ignition.*
- (11) *Other equipment which may constitute a source of ignition of flammable vapours shall not be permitted.*
- (12) *Smoking shall not be permitted and "No-Smoking" signs are to be prominently displayed.*

⁴⁹ Refer to the recommendations of the International Electrotechnical Commission, in particular publication 60079.

- (13) *Scuppers, piping and drainage connections for the space are to be non-combustible and shall not be led to machinery or other spaces where sources of ignition may be present.*
- (14) *Garage spaces are not to give direct access to any space other than a fuel store or lockers used within the space, unless provided with a lobby in accordance with the fire integrity requirements of Tables 6.1 and 6.2 (considered as a 'Corridor') and the provisions of section 2.6 with respect to Load Lines are also to be complied as with as applicable.*
- (15) *There shall be provided a fixed fire detection and fire alarm system complying with the requirements of the Fire Safety Systems Code and with the following provisions-*
- (a) *the fixed fire detection system shall be capable of rapidly detecting the onset of fire;*
 - (b) *the type of detectors and their spacing and location shall be to the satisfaction of the Administration, taking into account the effects of ventilation and other relevant factors; and*
 - (c) *after being installed, the system shall be tested under normal ventilation conditions and shall give an overall response time to the satisfaction of the Administration.*
- (16) *Manually operated call points shall be spaced so that no part of the space is more than 20m from a manually operated call point, and one shall be placed close to each exit from such spaces.*
- (17) *The boundary bulkheads and decks of garage spaces shall have fire integrity in accordance with Tables 6.1 and 6.2.*
- (18) *Garage space shall be fitted with a fixed pressure water-spray fire-extinguishing system which shall comply with the Fire Safety Systems Code; provided that the Administration may permit the use of any other fixed fire-extinguishing system⁵⁰ that has been shown, by a full-scale test in conditions simulating a flowing petrol fire in a vehicle space or a ro-ro space, to be not less effective in controlling fires likely to occur in a garage space.*
- (19) *When fixed pressure water-spray fire-extinguishing systems are provided, in view of the serious loss of stability which could arise⁵¹ due to large quantities of water accumulating on the deck or decks during the operation of the water-spraying system, the following arrangements shall be provided:*
- (a) *in the spaces above the bulkhead deck, scuppers shall be fitted so as to ensure that such water is rapidly discharged directly overboard;*

⁵⁰ Refer to revised Guidelines for the Design and Approval of Fixed Water-Based Fire-Fighting Systems for Ro-Ro Spaces and Special Category Spaces (MSC.1/Circular.1430)

⁵¹ Attention is drawn to IMO Resolution MSC.256(84) and the associated Circular MSC/Circ.1320 (paragraphs 1.1.2 and 3.1.1), with respect to the drainage of fire fighting water from spaces above the bulkhead deck in passenger ships.

- (b) *in the spaces below the bulkhead deck, the Administration may require additional pumping and drainage facilities and in such case-*
- (i) *the drainage system shall be sized to remove no less than 125% of the combined capacity of both the water-spraying system pumps and the required number of fire hose nozzles; and*
 - (ii) *the drainage system valves shall be operable from outside the protected space at a position in the vicinity of the extinguishing system controls.*
- (20) *At least two portable foam fire extinguishers or equivalent shall be provided at each deck level in each garage space and at least one portable fire extinguisher shall be located at each access to such space.*
- (21) *Notwithstanding the provisions in paragraph (9) & (3), except for cases where passengers are allowed access to a garage space, the ventilation system may be so designed and operated as to provide continuous ventilation of the space at the rate of at least 10 air changes per hour subject to, any electrical equipment being of a type so enclosed and protected as to prevent the escape of sparks within a height of 450 mm from the deck,*

6.18 Safety Centre:

Purpose

- (1) The purpose of this regulation is to provide a space to assist with the management of emergency situations

Location and arrangement

- (2) The safety centre shall either be a part of the navigation bridge or be located in a separate space adjacent to and having direct access to the navigation bridge, so that the management of emergencies can be performed without distracting watch officers from their navigational duties.

Layout and ergonomic design

- (3) The layout and ergonomic design of the safety centre shall take into account the guidelines developed by the Organization⁵², as appropriate.

Communications

- (4) Means of communication between the safety centre, the central control station, the navigation bridge, the engine control room, the storage room(s) for fire extinguishing system(s) and fire equipment lockers shall be provided.

⁵² Refer to Interim Clarifications of SOLAS Chapter II-2 Requirements Regarding Interrelation Between the Central Control Station, Navigation Bridge and Safety Centre (MSC.1/Circular.1368)

Control and monitoring of safety systems

- (5) Notwithstanding the requirements set out elsewhere in the Convention, the full functionality (operation, control, monitoring or any combination thereof, as required) of the safety systems listed below shall be available from the safety centre:
- (a) all powered ventilation systems;
 - (b) fire doors;
 - (c) general emergency alarm system;
 - (d) public address system;
 - (e) electrically powered evacuation guidance systems;
 - (f) watertight and semi-watertight doors;
 - (g) indicators for shell doors, loading doors and other closing appliances;
 - (h) water leakage of inner/outer bow doors, stern doors and any other shell door;
 - (i) television surveillance system;
 - (j) fire detection and alarm system;
 - (k) fixed fire-fighting local application system(s);
 - (l) sprinkler and equivalent systems;
 - (m) water-based systems for machinery spaces;
 - (n) alarm to summon the crew;
 - (o) atrium smoke extraction system;
 - (p) flooding detection systems; and
 - (q) fire pumps and emergency fire pumps.

CHAPTER 7

LIFE-SAVING APPLIANCES AND ARRANGEMENTS

7.1 *Application:*

SOLAS regulations referenced in this Chapter apply to ships to which this Code applies in the same way as they apply to passenger ships.

7.2 *General Requirements:*

- (1) Except as provided in subsections (5) and (6), life-saving appliances, communication equipment and arrangements required by this Chapter shall be approved by the Administration.
- (2) Before giving approval to life-saving appliances and arrangements, the Administration shall ensure that such life-saving appliances and arrangements-
 - (a) are tested, to confirm that they comply with the requirements of this Chapter and the LSA Code; or
 - (b) have successfully undergone, to the satisfaction of the Administration, tests which are substantially equivalent to those specified.
- (3) Prior to giving approval to novel life-saving appliances or arrangements, the Administration shall ensure that such appliances or arrangements-
 - (a) provide safety standards at least equivalent to the requirements of this Chapter and the LSA Code and have been evaluated and tested in accordance with the recommendations of the IMO; or
 - (b) have successfully undergone, an engineering analysis, evaluation and approval in accordance with section 7.26.
- (4) Procedures adopted by the Administration for approval shall also include the conditions whereby approval would continue or would be withdrawn.
- (5) Prior to accepting life-saving appliances and arrangements that have not been previously approved by the Administration, the Administration shall be satisfied that life-saving appliances and arrangements comply with the requirements of this Chapter and the LSA Code.
- (6) Life-saving appliances required by this Chapter for which detailed specifications are not included in the LSA Code shall be to the satisfaction of the Administration.

7.3 Stowage of Survival Craft:

- (1) Each survival craft shall be stowed:
 - (a) so that neither the survival craft nor its stowage arrangements will interfere with the operation of any other survival craft or rescue boat at any other launching station;
 - (b) as near the water surface as is safe and practicable and, in the case of a survival craft other than a liferaft intended for throw over board launching, in such a position that the survival craft in the embarkation position is not less than 2 metres above the waterline with the ship in the fully loaded condition under unfavourable conditions of trim of up to 10° and listed up to 20° either way, or to the angle at which the ship's weatherdeck edge becomes submerged, whichever is less;
 - (c) in a state of continuous readiness so that two crew members can carry out preparations for embarkation and launching in less than 5 minutes;
 - (d) fully equipped as required by this Chapter and the Code;
 - (e) as far as practicable, in a secure and sheltered position and protected from damage by fire and explosion; and
 - (f) in the case of survival craft for which approved launching devices are required, as close to accommodation and service spaces as possible.
- (2) Lifeboats for lowering down the ship's side shall be stowed as far forward of the propeller as practicable and where appropriate, the ship shall be so arranged that lifeboats, in their stowed positions, are protected from damage by heavy seas.
- (3) Life boats shall be stowed attached to launching appliances.
- (4) Every liferaft or group of liferafts, as the case may be, shall be stowed-
 - (a) with its painter permanently attached to the ship;
 - (b) with a float-free arrangement complying with the requirements of paragraph 4.1.6 of the LSA Code so that each floats free and, if inflatable, inflates automatically when the ship sinks; and
 - (c) so as to permit manual release of one raft or container at a time from their securing arrangements.
- (5) Davit-launched liferafts shall be stowed within reach of the lifting hooks, unless some means of transfer is provided which is not rendered inoperable within the limits of 10° trim and 20° list either way, or by ship motion or power failure.

7.4 Stowage of Rescue Boats:

Rescue boats shall be stowed-

- (a) in a state of continuous readiness for launching in not more than 5 minutes, and if the inflated type, in a fully inflated condition at all times;
- (b) in a position suitable for launching and recovery;
- (c) so that neither the rescue boat nor its stowage arrangements will interfere with the operation of any survival craft at any other launching station;
- (d) if it is also a lifeboat, in compliance with the requirements of section 7.3. and
- (e) If stowed forward the launching appliance and rescue boat should be entirely located in a sheltered position abaft the vertical extension of the aft most portion of the collision bulkhead.

7.5 Stowage of Marine Evacuation Systems:

- (1) The ship's side shall not have any openings between the embarkation station of the marine evacuation system and the waterline in the lightest seagoing condition and means shall be provided to protect the system from any projections.
- (2) Marine evacuation systems shall be in such positions as to ensure safe launching having particular regard to clearance from the propeller and steeply overhanging positions of the hull and so that, as far as practicable, the system can be launched down the straight side of the ship.
- (3) Each marine evacuation system shall be stowed so that neither the passage nor platform nor its stowage or operational arrangements will interfere with the operation of any other life-saving appliance at any other launching station.
- (4) Where appropriate, the ship shall be so arranged that the marine evacuation systems in their stowed positions are protected from damage by heavy seas.

7.6 Survival Craft Launching and Recovery Arrangements:

- (1) Subject to subsection (2), launching and embarkation appliances complying with the requirements of section 6.1 of the LSA Code shall, unless expressly provided otherwise, be provided for all survival craft except those which are;
 - (a) provided for use in conjunction with a marine evacuation system, complying with the requirements of section 6.2 of the LSA Code and stowed for launching directly from the stowed position under unfavourable conditions of trim of up to 10° and list of up to 20° either way.
- (2) Subsection (1) shall not apply to vessels carrying survival craft and launching and embarkation appliances provided in accordance with the full provisions of Chapter III of SOLAS.

- (3) Each lifeboat shall be provided with an appliance which is capable of launching and recovering the lifeboat and in addition there shall be provision for hanging-off the lifeboat to free the release gear for maintenance.
- (4) Launching and recovery arrangements shall be such that the appliance operator on the ship is able to observe the survival craft at all times during launching and for lifeboats during recovery.
- (5) Only one type of release mechanism shall be used for similar survival craft carried on board the ship'
- (6) Preparation and handling of survival craft at any one launching station shall not interfere with the prompt preparation and handling of any other survival craft or rescue boat at any other station.
- (7) Falls, where used, shall be long enough for the survival craft to reach the water with the ship in its lightest seagoing condition, under unfavourable conditions of trim of up to 10° and list of up to 20° either way.
- (8) During preparation and launching, the survival craft, its launching appliance, and the area of water into which it is to be launched shall be adequately illuminated by lighting supplied from the emergency source of electrical power required by Regulation 42 or 43 of Chapter II-1 of SOLAS, as appropriate.
- (9) Means shall be available to prevent any discharge of water onto survival craft during abandonment.
- (10) If there is a danger of the survival craft being damaged by the ship's stabiliser wings, means shall be available, powered by an emergency source of energy, to bring the stabiliser wings inboard; indicators operated by an emergency source of energy shall be available on the navigation bridge to show the position of the stabilizer wings.
- (11) If partially enclosed lifeboats complying with the requirements of section 4.5 of the LSA Code are carried, a davit span shall be provided, fitted with not less than two lifelines of sufficient length to reach the water with the ship in its lightest seagoing condition, under unfavourable conditions of trim of up to 10° and list of up to 20° either way.
- (12) *Survival craft and rescue boat launching appliances may deviate from the requirement of section 6.1.1.3 of the LSA Code, for the use of stored electrical power, under the following provisions:*
 - (a) *All other applicable elements of the LSA Code and the Code are met;*
 - (b) *Each source of stored electrical power should:*
 - (i) *serve one launching appliance only;*
 - (ii) *be configured to only be utilised by the launching appliance during an emergency, after the vessel's main and emergency power sources have failed;*

- (iii) *be suitable for use in the marine environment with appropriate rating given the location and redundancy of components;*
 - (iv) *be located in a space independent from any other sources of stored electrical power, protected from the effects of fire and flooding & in accordance with the vessel's Classification Society rules;*
 - (v) *be located in a space adjacent to the launching appliance it serves;*
 - (vi) *have capacity to power the launching appliance during deployment of all the survival craft or rescue boat it serves twice (including the deployment of any covers, bulwarks or similar required for the operation of the appliance);*
 - (vii) *be independently monitored and alarmed on the bridge, ECR and safety centre;*
 - (viii) *independently charged from the vessel's main and emergency power sources; and*
 - (ix) *be able to power the launching appliance on the opposite side of the vessel (when also in compliance with 7.6(12)).*
- (c) *The cabling serving each source of stored electrical power, and the cabling serving the launching appliance from the source of stored electrical power should:*
- (i) *be protected from the effects of fire and flooding throughout their length;*
 - (ii) *not to be led through high risk spaces; and*
 - (iii) *be independently run from the charging, cross powering, and powering cables.*
- (d) *Where a hydraulic system is driven by the source of stored electrical power, this should:*
- (i) *serve one launching appliance only;*
 - (ii) *be located in a space independent from any other hydraulic systems serving launching appliances, protected from the effects of fire and flooding;*
 - (iii) *be located in a space adjacent to the launching appliance it serves;*
 - (iv) *be able to cross power the hydraulic system serving the launching appliance on the opposite side of the vessel (when also in compliance with 7.6(12)); and*
 - (v) *the hydraulics also to be powered from main and emergency source before batteries called into use.*
- (e) *The maintenance of each source of stored electrical power should:*
- (i) *be in accordance with the manufacturer's instructions;*

- (ii) *the system equipment should be included in that identified in the vessels Safety Management System in accordance with the ISM Code section 10.3;*
- (iii) *include testing as per either IEEE 450/1188/1106 as appropriate or another internationally recognised standard; and*
- (iv) *not exceed the service life given by the manufacturer.*
- (f) *Discharge capacity test to be completed at delivery & as required thereafter in-line with the manufacturer's instructions;*
- (g) *A quantitative analysis is to be carried out as a part of a detailed assessment of all critical components to the acceptance of the Administration. As an example, the following may be performed:*
 - (i) *Quantitative analysis of fire risk within a space, supplemented by fire engineering analysis and/or fire testing where necessary (e.g., to assess consequences of a fire casualty on a system or system component);*
 - (ii) *Failure Mode Effect Analysis (FMEA) of a system or system component analyses in accordance with standard IEC 60812, Analysis techniques for system reliability – Procedure for failure mode and effects analysis (FMEA) or Annex 4 of the HSC 2000 Code - International Code of Safety for High-Speed Craft, 2000 (Procedures for Failure Mode and Effects Analysis), would be acceptable; or*
 - (iii) *Detailed analysis of possibility of flooding of internal watertight compartments and of consequences of flooding on system components, given the location of the compartment and arrangement of piping within the compartment.*

7.7 Rescue Boat Embarkation, Launching and Recovery Arrangements:

- (1) The rescue boat embarkation and launching arrangements shall be such that the rescue boat can be boarded and launched in the shortest possible time.
- (2) If the rescue boat is one of the ship's survival craft, the embarkation arrangements and launching station shall comply with the requirements of Sections 7.4 and 7.5.
- (3) Launching arrangements shall comply with the requirements of section 7.6, provided that all rescue boats shall be capable of being launched, where necessary utilising painters, with the ship making headway at speeds up to 5 knots in calm water.
- (4) Recovery time of the rescue boat shall be not more than 5 minutes in moderate sea conditions when loaded with its full complement of persons and equipment and where the rescue boat is also a lifeboat, this recovery time shall be possible when loaded with its lifeboat equipment and the approved rescue boat complement of at least six persons.

- (5) Rescue boat embarkation and recovery arrangements shall allow for safe and efficient handling of a stretcher case and foul weather recovery strops shall be provided for safety if heavy fall blocks constitute a danger.
- (6) *Each rescue boat carried shall be served by its own launching appliance*

7.8 Survival Craft and Rescue Boat Embarkation Arrangements:

- (1) Survival craft embarkation arrangements shall be designed for-
 - (a) all lifeboats to be boarded and launched either directly from the stowed position or from an embarkation deck but not both; and
 - (b) davit-launched liferafts to be boarded and launched from a position immediately adjacent to the stowed position or from a position to which, in compliance with the requirements of section 7.3(5), the liferaft is transferred prior to launching.
- (2) Rescue boat arrangements shall be such that the rescue boat can be boarded and launched directly from the stowed position with the number of persons assigned to crew the rescue boat on board.
- (3) Notwithstanding the requirements of paragraph (a) of subsection (1), if the rescue boat is also a lifeboat and the other lifeboats are boarded and launched from an embarkation deck, the arrangements shall be such that the rescue boat can also be boarded and launched from the embarkation deck.
- (4) The stowage height of a survival craft shall take into account the requirements of section 7.3.(1) (b), the escape provisions of Chapter 6, section 6.11, the size of the ship, and the weather conditions likely to be encountered in the vessel's intended area of operation; for davit-launched survival craft, the height of the davit head with the survival craft in embarkation position, shall, as far as practicable, not exceed 15 metres to the waterline when the ship is in its lightest seagoing condition.

7.9 Communications:

VHF Radiotelephone Apparatus

- (1) At least 3 two-way VHF radiotelephone apparatus shall be provided on every ship which shall conform to performance standards not inferior to those adopted by the IMO⁵³.

⁵³ Refer to the Performance standards for survival craft two-way VHF radiotelephone apparatus, adopted by the IMO by Resolution A.809(19), as it may be amended, annex 1 or annex 2 as applicable.

Search and Rescue Locating Device

- (2) At least one search and rescue locating device shall be carried on each side of every ship in accordance with the following provisions-
- (a) the search and rescue locating device shall be stowed in such locations that they can be rapidly placed in any survival craft or, alternatively, one transponder shall be stowed in each survival craft;
 - (b) one of the search and rescue locating device may be the search and rescue locating device required by SOLAS, Chapter IV (Radio Equipment), Regulation 7.1.3; and
 - (c) the search and rescue locating device shall conform to performance standards not inferior to those adopted by the IMO⁵⁴

Distress Flares

- (3) Not less than 12 rocket parachute flares, complying with the requirements of section 3.1 of the LSA Code, shall be carried and shall be stowed on or near the navigation bridge.

On-board Communications and Alarm Systems

- (4) An emergency means comprised of either fixed or portable equipment or both shall be provided for two-way communications between emergency control stations, muster and embarkation stations and strategic positions on board.

General Emergency Alarm

- (5) A general emergency alarm system, complying with section 7.2.1 of the LSA Code and with the following provisions, shall be provided on the navigation bridge and shall be used for summoning passengers and crew to muster stations and to initiate the actions included in the muster list-
- (a) the system shall be supplemented by either a public address system or other suitable means of communication;
 - (b) entertainment sound systems shall automatically be turned off when the general emergency alarm system is activated;
 - (c) the general emergency alarm system shall be audible throughout the ship and on all open decks; and
 - (d) on ships fitted with a marine evacuation system communication between the embarkation station and the platform or the survival craft shall be ensured.

⁵⁴ Refer to the Recommendation on performance standards for survival craft radar transponders for use in search and rescue operations, adopted by the Organization by resolution MSC.247(83) (A.802(19)), as amended) and the Recommendation on performance standards for survival craft AIS Search and Rescue transmitter (AIS SART), adopted by the Organization by resolution MSC.246(83).

Public Address System

- (6) All ships shall be fitted with a public address system which shall-
- (a) be clearly audible above the ambient noise in all spaces, as prescribed by paragraph 7.2.2.1 of the LSA Code;
 - (b) be provided with an override function controlled from one location on the navigation bridge and such other places on board as the Administration deems necessary, so that all emergency messages will be broadcast if any loudspeaker in the spaces concerned has been switched off, its volume has been turned down or the public address system is used for other purposes;
 - (c) have at least two loops which shall be sufficiently separated throughout their length and have two separate and independent amplifiers;
 - (d) be connected to the emergency source of electrical power required by Regulation 42.2.2 of Chapter II-1, Part D, of SOLAS; and
 - (e) be approved by the Administration having regard to the recommendations adopted by the IMO⁵⁵.

7.10 Personal Life Saving Appliances:*Lifebuoys*

- (1) *Ships shall carry not less than the number of lifebuoys prescribed in the following table-*

LIFEBUOYS AND ATTACHMENTS TO BE CARRIED	GROSS TONNAGE OF SHIP		
	Under 3000	3000-10000	Over 10000
<i>Total Minimum Number of Lifebuoys.</i>	8	12	18
<i>Minimum number of lifebuoys to be fitted with self-igniting lights</i>	4	6	9
<i>Minimum number of lifebuoys provided with self-igniting lights and self-activating smoke signals.</i>	2	2	2
<i>Minimum number of Lifebuoys to be provided with buoyant line.</i>	2	2	2

- (2) *Lifebuoys which are fitted with self-igniting lights or with self-igniting lights and self-activating smoke signals shall not also be fitted with a line.*
- (3) *The lifebuoys fitted with self-igniting lights and with self-activating smoke signals shall capable of quick release from the navigation bridge.*
- (4) At least one lifebuoy on each side of the ship shall be fitted with a buoyant lifeline complying with the requirements of paragraph 2.1.4 of the LSA Code equal in

⁵⁵ Refer to MSC/Circ.808, Recommendation on performance standards for public address systems on passenger ships, including cabling.

length to not less than twice the height at which it is stowed above the waterline in the lightest seagoing condition, or 30 metres, whichever is the greater.

- (5) Lifebuoys shall be-
- (a) so distributed as to be readily available on both sides of the ship and as far as practicable on all open decks extending to the ship's side; at least one shall be placed in the vicinity of the stern; and
 - (b) so stowed as to be capable of being rapidly cast loose, and not permanently secured in any way.
- (6) Each lifebuoy shall be marked in block capitals of the Roman alphabet with the name and port of registry of the ship on which it is carried.

Lifejackets

- (7) A lifejacket complying with the requirements of paragraph 2.2.1 or 2.2.2 of the LSA Code shall be provided for every person on board the ship and, in addition-
- (a) a number of lifejackets suitable for children equal to at least 10% of the number of passengers on board shall be provided or such greater number as may be required to provide a lifejacket for each child;
 - (b) a sufficient number of lifejackets shall be carried for persons on watch and for use at remotely located survival craft stations and the lifejackets carried for persons on watch should be stowed on the bridge, in the engine control room and at any other manned watch station, as the case may be;
 - (c) infant lifejackets shall be provided for each infant on board;
 - (d) each lifejacket shall be fitted with a light and whistle according to the requirements of section 2.2 of the LSA Code; and
 - (e) if the adult lifejackets provided are not designed to fit persons weighing up to 140 kg and with a chest girth of up to 1,750 millimetres, a sufficient number of suitable accessories shall be available on board to allow them to be secured to such person⁵⁶.
- (8) In addition to the lifejackets required by subsection (7) an additional number of lifejackets for not less than 5% of the total number of persons on board shall be carried and these lifejackets shall be stowed in conspicuous places on deck or at muster stations.
- (9) Lifejackets shall be so placed as to be readily accessible and their position shall be plainly indicated and where, due to the particular arrangements of the ship, the lifejackets provided in compliance with the requirements of subsection (7) may become inaccessible, alternative provisions shall be made to the satisfaction of the Administration which may include an increase in the number of lifejackets to be carried.

⁵⁶ See Resolution MSC.207(81) - Adoption of Amendments to the International Life-Saving Appliance (LSA) Code - (Adopted on 18 May 2006).

- (10) Where lifejackets for passengers are stowed in staterooms which are located remotely from direct routes between public spaces and muster stations, the additional lifejackets for these passengers required under subsection (9), shall be stowed either in the public spaces, the muster stations, or on direct routes between them provided that lifejackets shall be stowed so that their distribution and donning does not impede orderly movement to muster stations and survival craft embarkation stations.
- (11) The lifejackets used in totally enclosed lifeboats shall not impede entry into the lifeboat or seating, including operation of the seat belts in the lifeboat.

Immersion Suits and anti-Exposure Suits

- (12) *Other than a Passenger Yacht 2, all ships which do not carry partially or totally enclosed lifeboats an immersion suit⁵⁷, of an appropriate size, shall be provided for every person on board.*
- (13) *Immersion suits shall be so placed as to be readily accessible and their position shall be plainly indicated.*

7.11 Muster List and Emergency Instructions:

- (1) Clear instructions on the procedures to be followed in the event of an emergency shall be provided for every person on board and these instructions shall be drawn up in the language or languages required by the ship's flag State and in the English language.
- (2) Muster lists and emergency instructions complying with the requirements of this section shall be exhibited in conspicuous places throughout the ship including the navigation bridge, engine-room and crew accommodation spaces.
- (3) Illustrations and instructions in appropriate languages shall be available in passenger cabins and be conspicuously displayed at muster stations and other passenger spaces to inform passengers of-
 - (a) their muster station;
 - (b) the essential actions they must take in an emergency; and
 - (c) the method of donning lifejackets.
- (4) The muster list shall specify-

⁵⁷ Refer to the Recommendation on performance standards for survival craft radar transponders for use in search and rescue operations, adopted by the Organization by resolution MSC.247(83) (A.802(19)), as amended) and the Recommendation on performance standards for survival craft AIS Search and Rescue transmitter (AIS SART), adopted by the Organization by resolution MSC.246(83).

- (a) details of the general emergency alarm and public address system prescribed by sections 7.9(5) and (6);
 - (b) the action to be taken by crew and passengers when this alarm is sounded; and
 - (c) how the order to abandon ship will be given.
- (5) There shall be in place procedures in place for locating and rescuing passengers trapped in their staterooms
- (6) The muster list shall show the duties assigned to the different members of the crew including-
- (a) closing of the watertight doors, fire doors, valves, scuppers, sidescuttles, skylights, portholes and other similar openings in the ship;
 - (b) equipping of the survival craft and other life-saving appliances;
 - (c) preparation and launching of survival craft;
 - (d) general preparation of other life-saving appliances;
 - (e) muster of passengers;
 - (f) use of communication equipment;
 - (g) manning of fire parties assigned to deal with fires; and
 - (h) special duties assigned in respect to the use of fire-fighting equipment and installations.
- (7) The muster list shall also specify-
- (a) which officers are assigned to ensure that life-saving and fire appliances are maintained in good condition and are ready for immediate use;
 - (b) substitutes for key persons who may become disabled, taking into account that different emergencies may call for different actions; and
 - (c) the duties assigned to members of the crew in relation to passengers in case of emergency, which duties shall include-
 - (i) warning the passengers;
 - (ii) seeing that they are suitably clad and have donned their lifejackets correctly;
 - (iii) assembling passengers at muster stations;
 - (iv) keeping order in the passageways and on the stairways and generally controlling the movements of the passengers; and
 - (v) ensuring that a supply of blankets is taken to the survival craft.
- (8) The muster list shall be prepared before the ship proceeds to sea and if any changes in the crew subsequently take place which necessitate an alteration in the muster list, the master shall either revise the list or prepare a new list.

- (9) The format of the muster list used on passenger ships shall be approved by the Administration.

7.12 Operating Instructions:

Posters or signs shall be provided on or in the vicinity of survival craft and their launching controls and shall-

- (a) illustrate the purpose of controls and the procedures for operating the appliance and give relevant instructions or warnings;
- (b) be easily seen under emergency lighting conditions; and
- (c) use symbols in accordance with the recommendations of the IMO⁵⁸

7.13 Manning of Survival Craft and Supervision:

- (1) There shall be a sufficient number of trained persons on board for mustering and assisting untrained persons.
- (2) There shall be a sufficient number of crew members, who may be deck officers or other appropriately certificated crew members, on board for operating the survival craft and launching arrangements required for abandonment by the total number of persons on board.
- (3) A deck officer or certificated person shall be placed in charge of each survival craft to be used provided that the Administration, having due regard to the nature of the voyage, the number of persons on board and the characteristics of the ship, may permit persons practised in the handling and operation of liferafts to be placed in charge of liferafts in lieu of persons qualified as above and in the case of lifeboats a second-in-command shall also be nominated.
- (4) The person in charge of each of the survival craft shall have a list of the survival craft crew and shall ensure that the crew under his command are acquainted with their duties and in the case of lifeboats the second-in-command shall also have a list of the lifeboat crew.
- (5) Every motorised survival craft shall have a person assigned who is capable of operating the engine and carrying out minor adjustments.
- (6) The master shall ensure the equitable distribution of appropriately certificated crew members, referred to subsections (1), (2) and (3), among the ship's survival craft.

⁵⁸ Refer to Refer to the Symbols related to life-saving appliances and arrangements adopted by the IMO by Resolution A.760(18), as amended by resolution MSC.82(70).

7.14 Survival Craft Muster Stations and Embarkation Arrangements:

- (1) Lifeboats and liferafts for which approved launching appliances are required shall be stowed as close to accommodation and service spaces as possible.
- (2) Muster stations shall-
 - (a) be provided in the vicinity of and shall permit ready access to the embarkation stations;
 - (b) have sufficient clear deck space to accommodate all persons (passengers and crew) assigned to muster at that station, with at least 0.35 m² per person; and
 - (c) have ample room for the marshalling and instruction of passengers.
- (3) Muster and embarkation stations shall-
 - (a) be readily accessible from accommodation and work areas; and
 - (b) be adequately illuminated by lighting supplied from the emergency source of electrical power required by Regulation 42 or 43 of Chapter II-1, Part D, of SOLAS, as appropriate.
- (4) Alleyways, stairways and exits giving access to the muster and embarkation stations shall be adequately lighted and such lighting shall also be capable of being supplied by the emergency source of electrical power by Regulation 42 or 43 of Chapter II-1, Part D, of SOLAS, as appropriate; also in addition to and as part of the markings required under section 6.11(18) routes to muster stations shall be indicated with the muster station symbol, intended for that purpose, in accordance with the recommendations of the IMO⁵⁹⁶⁰.
- (5) Davit-launched survival craft muster and embarkation stations shall be so arranged as to enable stretcher cases to be placed in survival craft.
- (6) Subject to subsections (7) and (8), an embarkation ladder complying with paragraph 6.1.6 of the LSA Code, extending, in a single length, from the deck to the waterline in the lightest seagoing condition under unfavourable conditions of trim of up to 10° and a list of up to 20° either way shall be provided at each embarkation station or at every two adjacent embarkation stations for survival craft launched down the side of the ship.
- (7) The Administration may permit such ladders to be replaced by approved devices to afford access to the survival craft when waterborne, in which case there shall be at least one embarkation ladder on each side of the ship.
- (8) Where necessary, means shall be provided for bringing the davit-launched survival craft against the ship's side and holding them alongside so that persons can be safely embarked.

⁵⁹ Refer to the Symbols related to life-saving appliances and arrangements adopted by the IMO by Resolution A.760(18), as amended by MSC.82(80), and to the Guidelines for the evaluation, testing and application of low-location lighting on passenger ships adopted by the IMO by Resolution A.752(18).

⁶⁰ Refer to the Revised Guidelines for Passenger Ship Safety Instructions MSC/Circ.699

7.15 *Launching Stations:*

- (1) Launching stations shall be in such positions as to ensure safe launching having particular regard to clearance from the propeller and steeply overhanging portions of the hull and so that, as far as possible, survival craft, can be launched down the straight side of the ship. If positioned forward, they shall be located abaft the collision bulkhead in a sheltered position and, in this respect; the Administration shall give special consideration to the strength of the launching appliance.

7.16 *Line Throwing Appliance:*

- (1) A line-throwing appliance complying with the requirements of section 7.1 of the LSA Code shall be provided.

7.17 *Emergency Procedures, Training and Drills:****Duties, Musters and Briefings***

- (1) Every crew member with assigned emergency duties shall be familiar with these duties before the voyage begins.
- (2) On a ship engaged on a voyage where passengers are scheduled to be on board for more than 24 hours, musters of the passengers shall take place within 24 hours after their embarkation and passengers shall be instructed in the use of the lifejackets and the action to take in an emergency.
- (3) Subject to subsection (4), whenever new passengers embark, a passenger safety briefing shall be given to the new passengers immediately before sailing, or immediately after sailing, which shall include the following provisions-
 - (a) the briefing shall include the instructions required by sections 7.11 (1) and (3), and shall be made personally by a trained member of the crew or by means of an announcement, in one or more languages likely to be understood by the passenger;
 - (b) the announcement shall be made on the ship's public address system, or by other equivalent means likely to be heard at least by the passengers who have not yet heard it during the voyage;
 - (c) the briefing may be included in the muster required by section 7.17(2) if the muster is held immediately upon departure; and
 - (d) information cards or posters or video programmes displayed on the ship's video displays may be used to supplement the briefing, but may not be used to replace the announcement.

- (4) *The briefings referred to in subsection (3) may be delivered using alternative communication methods of conveying the required information provided that such alternative is at least as effective.*

Emergency Drills

- (5) Drills shall, as far as practicable, be conducted as if there were an actual emergency.
- (6) Every crew member shall participate in at least one abandon ship drill and one fire drill every month and-
- (a) where more than 25% of the crew have not participated in abandon ship and fire drills on board that particular ship in the previous month the drills of the crew shall take place within 24 hours of the ship leaving a port;
 - (b) where a ship enters service for the first time, after modification of a major character or when a new crew is engaged, the drills shall be held before the vessel sails,

provided that the Administration may accept other arrangements that are at least equivalent where this is impracticable.

- (7) Each abandon ship drill shall include-
- (a) summoning of passengers and crew to muster stations with the general emergency alarm followed by drill announcement on the public address or other communication system and ensuring that they are made aware of the order to abandon ship;
 - (b) reporting to stations and preparing for the duties described in the muster list;
 - (c) checking that passengers and crew are suitably dressed;
 - (d) checking that lifejackets are correctly donned;
 - (e) lowering of at least one lifeboat after any necessary preparation for launching;
 - (f) starting and operating the lifeboat engine;
 - (g) operation of davits used for launching liferafts;
 - (h) a mock search and rescue of passengers trapped in their staterooms; and
 - (i) instruction in the use of radio life-saving appliances.
- (8) Different lifeboats shall, as far as practicable, be lowered in compliance with the requirements of subsection(7), paragraph (e), at successive drills.
- (9) Except as provided in subsections (10), each lifeboat shall be launched, and manoeuvred in the water by its assigned operating crew, at least once every three months during an abandon ship drill.

- (10) The Administration may allow ships operating on short international voyages not to launch the lifeboats on one side if their berthing arrangements in port and their trading patterns do not permit launching of lifeboats on that side provided that all such lifeboats shall be lowered at least once every three months and launched at least annually.
- (11) As far as is reasonable and practicable, rescue boats other than lifeboats which are also rescue boats, shall be launched each month with their assigned crew aboard and manoeuvred in the water and in any case this requirement shall be complied with at least once every three months.
- (12) If lifeboat and rescue boat launching drills are carried out with the ship making headway, such drills shall, because of the dangers involved, be practiced in sheltered waters only and under the supervision of an officer experienced in such drills⁶¹.
- (13) If a ship is fitted with marine evacuation systems-
 - (a) drills shall include exercising of the procedures required for the deployment of such a system up to the point immediately preceding actual deployment;
 - (b) this aspect of drills should be augmented by regular instruction using the on-board training aids in the use of the system; and
 - (c) every system party member shall, as far as practicable, be further trained by participation in a full deployment of a similar system into water, either on board a ship or ashore, at intervals of not longer than three years; provided that this training can be associated with the rotational deployments required by section 7.20(17).
- (14) Emergency lighting for mustering and abandonment shall be tested at each abandon ship drill.

Fire Drills

- (15) Fire drills should be planned in such a way that due consideration is given to regular practice in the various emergencies that may occur.
- (16) Each fire drill shall include-
 - (a) reporting to stations and preparing for the duties described in the muster list required by section 7.11;
 - (b) starting of a fire pump, using at least the two required jets of water to show that the system is in proper working order;
 - (c) checking of fireman's outfit and other personal rescue equipment;
 - (d) checking of relevant communication equipment;
 - (e) checking the operation of watertight doors, fire doors, fire dampers and main inlets and outlets of ventilation systems in the drill area; and

⁶¹ Refer to the Guidelines on training for the purpose of launching lifeboats and rescue boats from ships making headway through the water adopted by the IMO by Resolution A.624(15).

- (f) checking the necessary arrangements for subsequent abandoning of the ship.
- (17) The equipment used during drills shall immediately be brought back to its fully operational condition and any faults and defects discovered during the drills shall be remedied as soon as possible.

On-board Training and Instructions

- (18) On-board training in the use of the ship's life-saving appliances, including survival craft equipment, and in the use of the ship's fire-extinguishing appliances shall-
- (a) subject to paragraph (b), be given as soon as possible but not later than two weeks after a crew member joins the ship;
 - (b) if the crew member is on a regularly scheduled rotating assignment to the ship, such training shall be given not later than two weeks after the time of first joining the ship;
 - (c) include instructions in the use of the ship's fire-extinguishing appliances, life-saving appliances, and in survival at sea, which shall be given at the same interval as the drills;
 - (d) Incorporate individual instruction covering different parts of the ship's life-saving and fire-extinguishing appliances, such that all the ship's life-saving and fire-extinguishing appliances shall be covered within any period of two months.
- (19) Every crew member shall be given instructions which shall include but not necessarily be limited to-
- (a) the operation and use of the ship's inflatable liferafts;
 - (b) the problems of hypothermia, first-aid treatment for hypothermia and other appropriate first-aid procedures;
 - (c) any special instructions necessary for use of the ship's life-saving appliances in severe weather and severe sea conditions; and
 - (d) the operation and use of fire-extinguishing appliances.
- (20) On-board training in the use of davit-launched liferafts shall take place at intervals of not more than Four months on every ship fitted with such appliances. Whenever practicable this shall include the inflation and lowering of a liferaft. This liferaft may be a special liferaft intended for training purposes only, which is not part of the ship's life-saving equipment; such a special liferaft shall be conspicuously marked.

Records

- (21) The date when musters are held, details of abandon ship drills and fire drills, drills of other life-saving appliances and on board training shall be recorded in such log-book as may be prescribed by the Administration; provided that if a full muster, drill or training session is not held at the appointed time, an entry shall be made in

the log-book stating the circumstances and the extent of the muster, drill or training session held.

7.18 *Frequency of Drills and Involvement of Crew and Passenger:*

- (1) An abandon ship drill and fire drill shall take place weekly.
- (2) The entire crew need not be involved in every drill, but each crew member must participate in an abandon ship drill and a fire drill each month.
- (3) Passengers shall be strongly encouraged to attend these drills.

7.19 *Training Manual and On-board Training Aids:*

- (1) A training manual complying with the requirements contained in subsections (2) to (4) shall be provided in each crew mess room and recreation room or in each crew cabin.
- (2) Subject to subsection (3), the training manual, which may comprise several volumes, shall contain instructions and information, in easily understood terms, illustrated wherever possible, on the life-saving appliances provided in the ship and on the best methods of survival.
- (3) Any part of such information as is contained in the manual may be provided in the form of audio-visual aids in lieu of the manual.
- (4) The following shall be explained in detail in the manual or through the audio-visual aids, as the case may be-
 - (a) donning of lifejackets, immersion suits and anti-exposure suits, as appropriate;
 - (b) muster at the assigned stations;
 - (c) boarding, launching, and clearing the survival craft and rescue boats, including, where applicable, use of marine evacuation systems;
 - (d) method of launching from within the survival craft;
 - (e) release from launching appliances;
 - (f) methods and use of devices for protection in launching areas, where appropriate;
 - (g) illumination in launching areas;
 - (h) use of all survival equipment;
 - (i) use of all detection equipment;
 - (j) with the assistance of illustrations, the use of radio lifesaving appliances;
 - (k) use of drogues;
 - (l) use of engine and accessories;

- (m) recovery of survival craft and rescue boats including stowage and securing;
 - (n) hazards of exposure and the need for warm clothing;
 - (o) best use of the survival craft facilities in order to survive;
 - (p) methods of retrieval, including the use of helicopter rescue gear (slings, baskets, stretchers), breeches-buoy and shore life-saving apparatus and ship's line-throwing apparatus;
 - (q) all other functions contained in the muster list and emergency instructions; and
 - (r) instructions for emergency repair of the life-saving appliances.
- (5) Every ship fitted with a marine evacuation system shall be provided with on-board training aids in the use of the system.
- (6) The training manual shall be written in English and, where the working language of the crew is not English, in such working language as appropriate.

7.20 Operational Readiness, Maintenance and Inspection:

Operational Readiness

- (1) Before the ship leaves port and at all times during the voyage, all life-saving appliances shall be in working order and ready for immediate use.

Maintenance of Life Saving Appliances

- (2) Maintenance, testing and inspections of life-saving appliances shall be carried out based on the guidelines developed by the IMO⁶² and in a manner having due regard to ensuring reliability of such appliances.
- (3) Instructions for on-board maintenance of life-saving appliances complying with subsection (16) shall be provided and maintenance shall be carried out accordingly.
- (4) The Administration may accept, in compliance with the requirements of subsection (3), a shipboard planned maintenance programme, which includes the items covered in the list required in accordance with subsection (16).

Maintenance of Falls

- (5) Falls used in launching shall be inspected periodically⁶³ with special regard for areas passing through sheaves, and renewed when necessary due to deterioration of the falls or at intervals of not more than 5 years, whichever is the earlier.

Spares and Repair Equipment

⁶² Refer to the Guidelines for periodic servicing and maintenance of lifeboats, launching appliances and on-load release gear (MSC/Circ.1093).

⁶³ Refer to Measures to prevent accidents with lifeboats (MSC.1/Circ.1206).

- (6) Spares and repair equipment shall be provided for life-saving appliances and their components which are subject to excessive wear or consumption and need to be replaced regularly.

Weekly Tests and Inspections

- (7) The following tests and inspections shall be carried out weekly and a report on them shall be entered in the log-book-
- (a) all survival craft, rescue boats and launching appliances shall be visually inspected to ensure that they are ready for use and the inspection shall include, but not be limited to, the condition of hooks, their attachment to the lifeboat and the confirmation that the on-load release gear has been properly and completely reset;
 - (b) all engines in lifeboats and rescue boats shall be run for a total period of not less than 3 minutes, provided the ambient temperature is above the minimum temperature required for starting and running the engine and during this period of time it should be demonstrated that the gear box and gear box train are engaging satisfactorily;
 - (c) if the special characteristics of an outboard motor fitted to a rescue boat would not allow it to be run for a period of 3 minutes other than with its propeller submerged, a suitable water supply may be provided; and
 - (d) the general emergency alarm shall be tested.

Monthly Tests and Inspections

- (8) The following tests and inspections shall be carried out monthly and a report on them shall be entered in the log-book-
- (a) all lifeboats, except free-fall lifeboats, shall be turned out from their stowed position, without any persons on board, if weather and sea conditions so allow; and
 - (b) inspection of the life-saving appliances, including lifeboat equipment, shall be carried out using the checklist required by subsection (16) to ensure that they are complete and in good order.

Servicing of Life Saving Appliances and Systems

- (9) Every inflatable liferaft, inflatable lifejacket, marine evacuation system and inflated rescue boat shall be serviced-
- (a) at intervals not exceeding 12 months, provided where in any case this is impracticable, the Administration may extend this period to 17 months; and
 - (b) at an approved servicing station which is competent to service them, maintains proper servicing facilities and uses only properly trained personnel⁶⁴.

⁶⁴ Refer to the Recommendation on conditions for the approval of servicing stations for inflatable liferafts, adopted by the IMO by Resolution A.761(18).

- (10) An Administration which approves new and novel inflatable liferaft arrangements pursuant to section 7.2 may allow for extended service intervals on the following conditions-
- (a) the new and novel liferaft arrangement has proved to maintain the same standard, as required by testing procedure, during extended service intervals.
 - (b) the liferaft system shall be checked on board by certified personnel at intervals set out in subsection (9)(b).
 - (c) service at intervals not exceeding five years shall be carried out in accordance with the recommendations of the IMO⁶⁵.
- (11) An Administration which permits extension of liferaft service intervals in accordance with subsection (10) shall notify the IMO of such action in accordance with Regulation 5(b) of Chapter I of SOLAS.
- (12) All repairs and maintenance of inflated rescue boats shall be carried out in accordance with the manufacturer's instructions; emergency repairs may be carried out on board the ship; however, permanent repairs shall be effected at an approved servicing station.

Servicing of Life Saving Appliances and Systems

- (13) Hydrostatic release units, other than disposable hydrostatic release units, shall be serviced-
- (a) at intervals not exceeding 12 months, provided where in any case this is impracticable, the Administration may extend this period to 17 months⁶⁶; and
 - (b) at a servicing station which is competent to service them, maintains proper servicing facilities and uses only properly trained personnel.

Periodic Servicing of Launching Appliances and on-Load Release Gear

- (14) Launching appliances shall be-
- (a) maintained in accordance with instructions for on-board maintenance as required by subsection (16).
 - (b) subject to a thorough examination at the annual surveys required by Regulations 7 or 8 of Chapter I of SOLAS, as applicable; and
 - (c) upon completion of the examination referred to in paragraph (b) above, subjected to a dynamic test of the winch brake at maximum lowering speed

⁶⁵ Refer to the Recommendation on conditions for the approval of servicing stations for inflatable liferafts, adopted by the IMO by Resolution A.761(18). Account should also be taken of the service period for the equipment recommended by the manufacturer.

⁶⁶ Refer to MSC/Circ.955, Servicing of life-saving appliances and Radiocommunication equipment under the harmonized system of survey and certification (HSSC).

and the load to be applied shall be the mass of the survival craft or rescue boat without persons on board, provided that, at intervals not exceeding five years, the test shall be carried out with a proof load equal to 1.1 times the weight of the survival craft or rescue boat and its full complement of persons and equipment.

- (15) Lifeboat or rescue boat on-load release gear shall be-
- (a) maintained in accordance with instructions for on-board maintenance as required by subsection (16);
 - (b) subject to a thorough examination and operational test during the annual surveys required by Regulations 7 or 8 of Chapter I of SOLAS, as applicable; and
 - (c) operationally tested under a load of 1.1 times the total mass of the boat when loaded with its full complement of persons and equipment whenever the release gear is overhauled provided that such over-hauling and test shall be carried out at least once every five years⁶⁷.
- (16) Instructions for on-board maintenance of life-saving appliances shall be easily understood, illustrated wherever possible, and, as appropriate, shall include the following for each appliance-
- (a) a checklist for use when carrying out the inspections required by subsection (8)(b);
 - (b) maintenance and repair instructions;
 - (c) a schedule of periodic maintenance;
 - (d) a diagram of lubrication points with the recommended lubricants;
 - (e) a list of replaceable parts;
 - (f) a list of sources of spare parts; and
 - (g) a log for records of inspections and maintenance.

Rotational Deployment of Marine Evacuation Systems

- (17) In addition to or in conjunction with the servicing intervals of marine evacuation systems required by subsection (9), each marine evacuation system should be deployed from the ship on a rotational basis at intervals to be agreed by the Administration provided that each system is to be deployed at least once every six years.

Marking of Stowage Locations

- (18) Containers, brackets, racks, and other similar stowage locations for life-saving equipment, shall be marked with symbols in accordance with the recommendations

⁶⁷ Refer to the Recommendation on testing of life-saving appliances, adopted by the IMO by resolution A.689(17). For life-saving appliances installed on board on or after 1 July 1999, refer to the Revised Recommendations on testing of life-saving appliances, adopted by the IMO by resolution MSC.81(70).

of the IMO⁶⁸, indicating the devices stowed in that location for that purpose and where more than one device is stowed in that location, the number of devices shall also be indicated.

7.21 *Survival Craft and Rescue Boats to be Carried:*

Survival Craft

- (1) Passenger Yachts to which this Code applies, shall carry survival craft in accordance with Annex 3.
- (2) Where lifeboats are required in accordance with Annex 3, A Passenger Yacht shall carry -
 - (a) subject to subparagraph 7.21(2)(b), partially or totally enclosed lifeboats on each side of such aggregate capacity as will accommodate not less than 50% of the total number of persons on board;
 - (b) the Administration may permit the substitution of lifeboats by liferafts of equivalent total capacity provided that there shall never be less than sufficient lifeboats on each side of the ship to accommodate 37.5% of the total number of persons on board;
 - (c) the inflatable or rigid liferafts shall be served by launching appliances equally distributed on each side of the ship; and
 - (d) in addition, inflatable or rigid liferafts of such aggregate capacity as will accommodate at least 25% of the total number of persons on board or sufficient liferafts such that in the event of any one survival craft being lost or rendered unserviceable, sufficient aggregate capacity remains on each side of the ship to accommodate 50% of the total number of persons on board, whichever is the greater;
 - (e) the liferafts in subsection 7.21(2)(d) shall be served by at least one launching appliance on each side which may be those provided in compliance with the requirements of subsection 7.21(2)(c) or equivalent approved appliances capable of being used on both sides.
- (3) For vessels carrying Davit Launched Life Rafts (DLLRs) or a combination of DLLRs and Marine Evacuation Systems (MESs) the following shall apply-
 - (e) *MESs are not permitted as the sole means of abandonment and in this regard the aggregate capacity of DLLRs each side of the ship shall be sufficient for not less than 100% of the total persons on board;*
 - (f) in the event of the loss of any one survival craft there shall be at least 100% capacity remaining on either side; and
 - (g) in all cases dry shod evacuation shall be required.

⁶⁸ Refer to the Symbols related to life-saving appliances and arrangements, adopted by the IMO by Resolution A.760(18).

- (h) DLLR are permitted as the sole means of abandonment
- (4) Any Passenger Yacht to which this Code applies which operates in the Polar Regions shall carry life-saving appliances in accordance with the IMO Guidelines for Polar Regions as per sub-section 3.1(g).
- (5) A passenger Yacht of less than 500 gross tonnage which carries less than 200 persons may, under SOLAS Chapter III, Part B, Section II, Regulation 21.1-1.4, carry 300% (150% each side) inflatable or rigid liferafts complying with sections 4.2 or 4.3 of Chapter IV of the LSA Code providing other applicable provisions of the relevant Conventions are complied with.

Rescue Boats

- (6) Ships of 500 gross tonnage and over shall carry at least one rescue boat on each side of the ship.
- (7) Ships of less than 500 gross tonnage shall carry at least one rescue boat.
- (8) A lifeboat may be accepted as a rescue boat provided it also complies with the requirements for a rescue boat.

7.22 *Time to Launch Survival Craft:*

- (1) All survival craft required to provide for abandonment by the total number of persons on board shall be capable of being launched with their full complement of persons and equipment within a period of 30 minutes from the time the abandon ship signal is given and after all persons have been assembled, with lifejackets donned.

7.23 *Marshalling of Liferafts:*

- (1) The number of lifeboats and rescue boats that are carried on ships shall be sufficient to ensure that in providing for abandonment by the total number of persons on board not more than six liferafts need be marshalled by each lifeboat or rescue boat.

7.24 *Decision Support System for Masters:*

- (1) All ships shall be provided with a decision support system for emergency management on the navigation bridge.

- (2) The system shall, as a minimum, consist of a printed emergency plan or plans⁶⁹. All foreseeable emergency situations shall be identified in the emergency plan or plans, including, but not limited to, the following main groups of emergencies-
 - (a) fire;
 - (b) damage to ship;
 - (c) pollution;
 - (d) unlawful acts threatening the safety of the ship and the security of its passengers and crew;
 - (e) personnel accidents; and
 - (f) emergency assistance to other ships.
- (3) The emergency procedures established in the emergency plan or plans shall provide decision support to masters for handling any combination of emergency situations.
- (4) The emergency plan or plans shall have a uniform structure and be easy to use.
- (5) Where applicable, the actual loading condition as calculated for the ship's voyage stability shall be used for damage control purposes.
- (6) In addition to the printed emergency plan or plans, the Administration may also accept the use of a computer-based decision support system on the navigation bridge which provides all the information contained in the emergency plan or plans, procedures, checklists, etc., which is able to present a list of recommended actions to be carried out in foreseeable emergencies.

7.25 Information on Passengers:

- (1) Every ship shall have in place a system for counting all persons on board prior to departure. The system for counting all persons on board shall be approved by the Administration.
- (2) Details of persons who have declared a need for special care or assistance in emergency situations shall be recorded and communicated to the master prior to departure.
- (3) In addition, the names and gender of all persons on board, distinguishing between adults, children and infants shall be recorded for search and rescue purposes.
- (4) The information required by this section shall be kept ashore and made readily available to search and rescue services when needed.

⁶⁹ Refer to the Guidelines for a structure of an integrated system of contingency planning for shipboard emergencies adopted by the IMO by resolution A.852(20).

7.26 *Alternative Design and Arrangements:*

Purpose

- (1) The purpose of this section is to provide a methodology for the assessment and acceptance of alternative design and arrangements for life saving appliances.

General

- (2) Life-saving appliances and arrangements may deviate from the requirements set out in this Chapter, provided that the alternative design and arrangements meet the intent of the requirements concerned and provide an equivalent level of safety to Chapter III of SOLAS.
- (3) When alternative design or arrangements deviate from the prescriptive requirements of this Chapter, an engineering analysis, evaluation and approval of the design and arrangements shall be carried out.

Engineering Analysis

- (4) The engineering analysis shall be prepared and submitted to the Administration, based on the guidelines developed by the IMO¹⁷ and shall include, as a minimum, the following elements-
 - (a) determination of the ship type and the life-saving appliance and arrangements concerned;
 - (b) identification of the prescriptive requirement(s) with which the life-saving appliance and arrangements will not comply;
 - (c) identification of the reason the proposed design will not meet the prescriptive requirements supported by compliance with other recognised engineering or industry standards;
 - (d) determination of the performance criteria for the ship and the life-saving appliance and arrangements concerned addressed by the relevant prescriptive requirement(s)-
 - (i) performance criteria shall provide a level of safety not inferior to the relevant prescriptive requirements contained in this Chapter; and
 - (ii) performance criteria shall be quantifiable and measurable;
 - (e) detailed description of the alternative design and arrangements, including a list of the assumptions used in the design and any proposed operational restrictions or conditions;
 - (f) technical justification demonstrating that the alternative design and arrangements meet the safety performance criteria; and
 - (g) risk assessment based on identification of the potential faults and hazards associated with the proposal.

Evaluation of the Alternative Design and Arrangements

- (5) The engineering analysis required by subsection (4) shall be evaluated and approved by the Administration, taking into account the guidelines developed by the IMO⁷⁰.
- (6) A copy of the documentation, as approved by the Administration, indicating that the alternative design and arrangements comply with this paragraph, shall be carried on board the ship.

Exchange of Information

- (7) The Administration shall communicate to the IMO pertinent information concerning alternative design and arrangements approved by them for circulation to all Contracting Governments.

Re-evaluation due to Change of Conditions

- (8) If the assumptions and operational restrictions that were stipulated in the alternative design and arrangements are changed, the engineering analysis shall be carried out under the changed condition and shall be approved by the Administration.

7.27 Recovery of persons from the water

- (1) *All ships shall have ship-specific plans and procedures for recovery of persons from the water, taking into account the guidelines developed by the Organization⁷¹. The plans and procedures shall identify the equipment intended to be used for recovery purposes and measures to be taken to minimize the risk to shipboard personnel involved in recovery operations. Ships constructed before 1 July 2015 shall comply with this requirement by the first periodical or renewal safety equipment survey of the ship to be carried out after 1 July 2015, whichever comes first.*

⁷⁰ Refer to the guidelines on alternative design and arrangements for SOLAS Chapter II-1 and III (MSC.1/Circ.1212).

⁷¹ Refer to the Guidelines for the development of plans and procedures for recovery of persons from the water (MSC.1/Circ.1412).

CHAPTER 8

RADIOCOMMUNICATIONS, SAFETY OF NAVIGATION, INTERNATIONAL SAFETY MANAGEMENT AND MARITIME SECURITY

8.1 Radiocommunications:

- (1) *Every ship to which this Code applies shall comply with the applicable requirements of Chapter IV of SOLAS, 1974, as amended.*

8.2 Safety of Navigation:

- (1) *Subject to any special provisions given in the national legislation every ship to which this Code applies shall comply with the applicable requirements of Chapter V of SOLAS, 1974, as amended.*
- (2) *Deviations from the requirements of SOLAS V/22.1.9 may be considered by the Administration, provided that they:*
 - (a) *provide safety standards at least equivalent to the requirements of this Chapter;*
 - (b) *meet the intent of the requirements concerned; and*
 - (c) *where necessary, have successfully undergone testing to the satisfaction of the Administration; or*
 - (d) *have successfully undergone, an engineering analysis, evaluation and approval.*

8.3 International Safety Management:

- (1) *Every ship to which this Code applies shall comply with the applicable requirements of Chapter IX of SOLAS, 1974, as amended.*

8.4 Maritime Security:

- (1) *Every ship to which this Code applies shall comply with the applicable requirements of Chapter XI-2 of SOLAS, 1974, as amended, regarding Special Measures to Enhance Maritime Security.*

This page is intentionally added to achieve correct pagination.

CHAPTER 9

ACCOMMODATION AND RECREATIONAL FACILITIES-DESIGN AND CONSTRUCTION:

9.1 *ILO Maritime Labour Convention*

Ships shall be constructed, certificated and operated under the provisions of the The Maritime Labour Convention, 2006 (ILO) for passenger ships.

This page has been intentionally inserted to preserve correct pagination.

CHAPTER 10

HEALTH AND SAFETY

10.1 Application:

In addition to any national legislation applicable, working practices shall take account of the United Kingdom “Code of Safe Working Practices for Merchant Seamen” (Consolidated Edition – 2009), as may be amended from time to time.

This page has been intentionally inserted to preserve correct pagination.

CHAPTER 11

SHIP-SHORE TRANSFER OF PERSONNEL

11.1 *Tenders (Dinghies):*

- (1) *When a vessel carries a rigid or inflatable tender, it should be fit for its intended use, regularly inspected by the owner/managing agent, and maintained in a safe condition.*
- (2) *Safety equipment should be provided in the tender as appropriate to its intended range and area of operation.*
- (3) *Each tender should be clearly marked with the number of persons (mass 75 kg) that it can safely carry, and the name of the parent vessel.*
- (4) *In the case of petrol-engined tenders, operation should be in accordance with the manufacturer's instructions with due consideration to the safety requirements for the carriage of petrol.*
- (5) *Where more than 12 passengers are carried by the tenders, the IMO guidelines for passenger ship tenders MSC.1/Circ.1417 should be followed.*

11.2 *Helicopters:*

- (1) *When provision is made for helicopter operations to or from the vessel, the helicopter landing area should be located on an appropriate area of the weather or superstructure deck, or on a purpose built landing area permanently attached to the vessel or structure, providing-*
 - (a) *the structural strength of the helicopter landing area is designed and constructed according to Classification Society rules on helicopter landing areas for vessels and a Certificate of Compliance is issued by the relevant Classification Society;*
 - (b) *all other considerations such as landing area size, means of access, obstacle protected surfaces (sector clearance zones), lighting, and marking should be in accordance with Annex 2 of this Code with a Helicopter Landing Area Certificate issued by the Aviation Inspection Body;*
 - (c) *the requirements for helicopter facilities in section 6.16 of the Code are complied with in full;*
 - (d) *helicopter operations to and from the vessel are restricted to within the weather, pitch, roll, and heave limits for the vessel as defined where appropriate in the relevant operating rules, and/or in the rotorcraft flight manual (RFM) and/or by the Aviation Inspection Body;*
 - (e) *the helicopter landing area is designed for the largest helicopter which it is intended to use; and*
 - (f) *the operational procedures for the vessel fully reflect the above.*

- (2) *If it is proposed to provide hangar and/or refuelling facilities for a helicopter whilst it is on board the vessel, prior approval should be sought from the Administration. Such facilities should be arranged in accordance with Annex 2.*
- (3) *In order to meet the full safe landing area size requirement in Annex 2 of this Code, the out-board edges of the landing area may be engineered to retract or fold to a closed position when the landing area is not in use providing the overall safe landing area, including the retractable or movable sides, when fully deployed, provides the minimum load bearing area specified.*
- (4) *The minimum safe landing area dynamic load bearing capability should be 2.5 times the Maximum Take-Off Mass (MTOM) of the heaviest helicopter intended to use the landing area. This may only be reduced, subject to agreement from both the Classification Society and Administration.*
- (5) *The officer(s) in charge of each helicopter landing area operations team should be in possession of an Offshore Petroleum Industry Training Organisation (OPITO) Approved Offshore Helicopter Landing Officer (HLO) certificate. All other crew assigned duties within the helicopter landing area operations team(s) should be in possession of an OPITO Approved Offshore Emergency Helideck Team Member Certificate. Certification from an equivalent course approved by the Administration will also be accepted. All helicopter operations certification should be in date.*
- (6) *All crew on board should undergo familiarisation training regarding helicopter operations on board and it is recommended that all crew undertake helicopter crash survivability (“dunker”) training at a recognised OPITO training centre, prior to commencement of duties.*
- (7) *Ship to shore and ship to helicopter communications procedures, ship operating procedures, and guidance on helicopter emergencies are outlined in the International Chamber of Shipping Guide to Helicopter/Ship Operations and should be used as part of the operational procedures of the vessel.*

11.3 Pilot Boarding Arrangements:

- (1) *Boarding arrangements provided for pilots should have due regard for SOLAS Chapter V, Regulation 23 and IMO Resolution A1045(27) “Pilot transfer arrangements”, International Maritime Pilots’ Association (IMPA) recommendations, or any documents replacing them taking into consideration any national requirements.*

11.4 Gangways, Passerelles and Accommodation Ladders:

- (1) *A safe means of access is to be provided at all times when in port, either deployed or available for deployment. If the safe means of access is not deployed, there shall be a means provided for communication between those on the quay and those on*

board and in all circumstances a safe means of access shall be provided for any persons embarking or disembarking on the ship.

- (2) Access equipment and immediate approaches to it should be adequately illuminated.*
- (3) Equipment used to provide access should also meet the standards or requirements set out in international standards⁷² and applicable national legislation.*

⁷² Refer to MSC.1/Circular.1331, Guidelines for construction, installation, maintenance and inspection/survey of means of embarkation and disembarkation.

This page is intentionally added to achieve correct pagination.

CHAPTER 12

MANNING, CERTIFICATION AND HOURS OF WORK

12.1 *Application:*

- (1) *This Chapter applies to all yachts to which the Code applies and to the certification, training and qualifications of the master, officers and crew on such yachts and their hours of work and rest.*

12.2 *Purpose:*

- (1) *The purpose of the provisions of this Chapter are to-*
- (a) *set out the responsibilities of the owners, masters, crew and operators of Passenger Yachts with respect to safe manning;*
 - (b) *ensure that the yacht is at all times adequately manned such that all relevant safety and marine environment protection and security standards can be maintained bearing in mind the other day to day operational requirements of the yacht;*
 - (c) *ensure that all crew on board the yacht are properly trained, certificated and qualified for the position held and the duties to be discharged; and*
 - (d) *ensure that the master, officers and other crew members are adequately rested before assuming duties, particularly where such duties impinge on the safety of the vessel, the protection of the marine environment and security duties; and*
 - (e) *ensure that all seafarers are medically fit.*

12.3 *Safe Manning:*

General

- (1) *All passenger yachts to which this Code applies shall carry, in addition to master, a sufficient number of qualified deck and engineer officers, together with a sufficient number of appropriately qualified ratings, to ensure that the yacht can at all times be operated safely, with respect to the safety of the yacht and all persons on board, the protection of the marine environment and maritime security.*

Principles of Safe Manning

- (1) *In assessing the appropriate safe manning level for a passenger yacht due regard shall be given to-*

- (f) *IMO Resolution 890(21) (as amended from time to time) which defines the principles of safe manning necessary to ensure the safe operation of ship and the prevention of pollution of the marine environment;*
- (g) *applicable international Conventions, including the IMO STCW Convention and the ILO Maritime Labour Convention⁷³; and*
- (h) *national legislation relating to Safe Manning Certification, Hours of Work and Rest and related matters.*

Responsibility for Safe Manning:

- (2) *It is the responsibility of the owner, master and operators of passenger yachts to ensure that at all times the vessel is safely manned and operated in compliance with the standards of safety, marine environment protection and security set out in the various applicable international Conventions, Codes and national legislation and in accordance with any Safe Manning Document or similar certification in force with respect to the ship.*
- (3) *In assessing the appropriate level of manning for a passenger yacht the following factors, in addition to those in subsection (2) are among those which are to be taken into account-*
 - (a) *the size, type and complexity of the yacht and its equipment;*
 - (b) *type and size of the yacht's main propulsion and auxiliary machinery;*
 - (c) *the area and type of operation in which the yacht is to be engaged including-*
 - (i) *likely navigational and other hazards to be encountered;*
 - (ii) *frequency of port calls; and*
 - (iii) *density of traffic; and*
 - (d) *the demands on the master, officers and crew in the normal day to day running of the yacht over and above safety and marine environmental protection considerations;*
 - (e) *the need to mount safe navigational and engine watches at sea, at anchor and in port;*
 - (f) *peak workloads;*
 - (g) *the need to provide statutory periods of rest;*
 - (h) *on-board maintenance requirements;*
 - (i) *on-board mooring and unmooring arrangements; and*
 - (j) *emergency situations and procedures including the mustering and evacuation*

⁷³ Whilst this Convention is currently (November 2010) not yet in force it is expected to enter into force internationally before the end of 2012. The Regulations and Code annexed to the MLC Convention embody many existing provisions regarding a considerable number of long established ILO Maritime Labour Conventions. Administrations will therefore already be applying many of the principles and provisions found in the MLC.

of passengers;

- (k) compliance with the yacht's Safety Management System; and*
- (l) compliance with Maritime Security requirements.*

12.4 Application for a Safe Manning Document:

- (1) Vessels to which the Code applies should be in possession of a Safe Manning Document or similar certification which signifies that the Administration has approved the minimum manning levels for the yacht.*
- (2) Application for a Safe Manning Document or Certificate should be made to the Administration, in accordance with its procedures, by the owner or operator of the yacht or a person duly authorised to act in this regard and the application should present a clear rationale on which the proposed manning is based, including-*
 - (a) an explanation of how the proposed manning has been determined;*
 - (b) Confirmation that the assessment has taken account, as a minimum, of all the relevant guidelines as set out in this Chapter;*
 - (c) how the requirements relating to hours of work and rest are to be complied with; and*
 - (d) details of the yacht in terms of its size, layout, equipment propulsion and auxiliary machinery and other such relevant factors affecting manning levels⁷⁴*
- (3) More than one proposal for safe manning for the same yacht may be submitted to take account of differing operational patterns or a variation in the number of passengers carried.*

12.5 Qualifications and Training:

- (1) In general terms the master and officers serving on a passenger yacht to which this Code applies shall be certificated in accordance with the relevant provisions of the STCW Convention provided that for private passenger yachts appropriate Yacht qualifications may be accepted (see Tables 12.1 to 12.4).*
- (2) Any person employed or engaged in any capacity on board a seagoing ship to which this Code applies, other than a seafarer employed or engaged as such in accordance with subsection (3), shall be deemed to be a passenger unless such person has satisfactorily undergone familiarisation training and instruction in accordance with the Code to the STCW Convention⁷⁵ and is in possession of*

⁷⁴ The procedures of Administration concerned with respect to applications for Safe Manning Documents will provide further detail as necessary. To effectively convey the general layout and equipment of the yacht, including mooring and un-mooring arrangements, appropriate plans should be submitted which should include a General Arrangement Plan.

⁷⁵ See Section A-VI/1 of Part A of the Code to the STCW Convention, paragraph 1.

appropriate documentation attesting to the satisfactory completion of such familiarisation training and instruction.

- (3) *Any seafarer employed or engaged in any capacity on board a seagoing ship to which this Code applies, on the business of that ship as part of the ship's complement with designated safety or pollution prevention duties in the operation of the ship shall, in addition to the familiarisation training referred to in subsection (2) and before being assigned to any shipboard duties, have received basic safety training and instruction in accordance with the Code to the STCW Convention⁷⁶ and be in possession of appropriate documentation attesting to the satisfactory completion of such training and instruction.*
- (4) *Masters and officers and should receive additional training⁷⁷ to enable them to perform their duties properly with respect to the carriage of passengers.*
- (5) *Other crew members who are nominated on muster lists to assist passengers in emergency situation should also have undergone appropriate additional training⁷⁷.*
- (6) *The number of trained persons should always be sufficient to assist the total number of passengers who may be on board at any one time.*
- (7) *The Tables 12-1 to 12-4 in subsection (8) provide guidelines only on the levels of manning appropriate to the various categories of passenger yachts; these Tables are for guidance only and do not in any way indicate an appropriate minimum level of manning for a particular yacht or category of yacht.*
- (8) *In relation to Chapter 9 of the Code (Accommodation and Recreation Facilities-Design and Construction), for the avoidance of doubt and in accordance with long-standing practice, officers include the following persons holding the appropriate qualifications and serving in the following-*
- | | |
|---|--|
| <i>(a) Master.</i> | <i>(f) Other Officers in the Deck or Engine Department designated as such in the ship's Articles of Agreement or Employment Agreement.</i> |
| <i>(b) Chief Engineer.</i> | <i>(g) Electro-Technical Officer (ETO).</i> |
| <i>(c) Chief Officer/Chief Mate.</i> | <i>(h) Chief Steward/Purser.(Head of interior department)</i> |
| <i>(d) Officer in Charge of a Navigational Watch (Deck Officer).</i> | |
| <i>(e) Officer in Charge of an Engine Room Watch (Engineer Officer)</i> | |
- (9) *Guidance Tables for the various categories of passenger yachts-*

⁷⁶ See Section A-VI/1 of Part A of the Code to the STCW Convention, paragraph 2.

⁷⁷ Training will be in accordance with Regulation V/2 of Part A of the Code to the STCW Convention as required by the Administration – See Annex 6 to the Code.

TABLE 12-1

PASSENGER PLEASURE YACHT
(PY-P)

RANGE	GROSS TONNAGE	MANNING LEVELS FOR KEY SAFETY PERSONNEL								REMARKS
		MASTER	CHIEF OFFICER	OOW (DECK)	CHIEF ENGINEER	2 ND ENGINEER	OOW (ENGINEER)	RATINGS (DECK DEPT.)	RATINGS (ENGINE DEPT.)	
Unlimited	Up to 500	1	1	1	1	1	--	2	2	Crew to be sufficient for passenger mustering in emergencies etc. See also Additional Notes to all Tables.
	≥500 but <3000	1	1	1	1	1	1	2	2	
	≥3000	1	1	2	1	1	2	3	3	
Geographical or weather Limitations as per Administration.	Up to 500	Will be determined on a case by case basis depending on area of operations and any other limitations applying.								
	≥500 but <3000									

Notes to Table 12-1:

- (a) The manning levels are for guidance only and each case will be considered on its merits taking into account all the factors relating to the safe operation of the yacht.
- (b) For unlimited area of operation levels of certification of the Master and Officers will be as required under STCW.
- (c) The Administration may, on Passenger Pleasure Yachts of less than 3000 gross tonnage operating within geographical and weather limitations, accept senior Yacht qualifications at the appropriate level with respect to Officer of the Watch (OOW) positions.

TABLE 12-2

PASSENGER YACHT 2
(PY-2)

RANGE	GROSS TONNAGE	MANNING LEVELS FOR KEY SAFETY PERSONNEL								REMARKS
		MASTER	CHIEF OFFICER	OOW (DECK)	CHIEF ENGINEER	2 ND ENGINEER	OOW (ENGINEER)	RATINGS (DECK DEPT.)	RATINGS (ENGINE DEPT.)	
(a) Within 60 nm of a safe haven;	Up to 500	1	1	1	1	1	--	2	2	Crew to be sufficient for passenger mustering in emergencies etc. See also Additional Notes to all Tables.
(b) Not more than 20 nm from land; and	≥500 but <3000	1	1	1	1	1	1	2	2	
(c) Maximum sea and wind condition of Beaufort Force 6.	≥3000	1	1	2	1	1	2	3	3	

Notes to Table 12-2:

- (a) The manning levels are for guidance only and each case will be considered on its merits taking into account all the factors relating to the safe operation of the yacht.
- (b) For all vessels of this category the levels of certification of the Master and Officers will be as required under STCW.

TABLE 12-3

PASSENGER YACHT 1
(PY-1)

RANGE	GROSS TONNAGE	MANNING LEVELS FOR KEY SAFETY PERSONNEL								REMARKS
		MASTER	CHIEF OFFICER	OOW (DECK)	CHIEF ENGINEER	2 ND ENGINEER	OOW (ENGINEER)	RATINGS (DECK DEPT.)	RATINGS (ENGINE DEPT.)	
Prescribed International Voyage ⁷⁸	Up to 500	1	1	1	1	1	--	2	2	Crew to be sufficient for passenger mustering in emergencies etc. See also Additional Notes to all Tables.
	≥500 but <3000	1	1	1	1	1	1	2	2	
	≥3000	1	1	2	1	1	2	3	3	

Notes to Table 12-3:

- (a) *The manning levels are for guidance only and each case will be considered on its merits.*
- (b) *For all vessels of this category the levels of certification of the Master and Officers will be as required under STCW regardless of the length of the prescribed voyage.*

⁷⁸ A "Prescribed International Voyage" is an international voyage during the course of which a ship is not more than 200 nautical miles from a port or place in which the passengers and crew could be placed in safety and within a geographical area which limits the length of the voyage to a maximum of 1000 nautical miles from the initial point of departure, as specified in any Certificate issued in accordance with the Code with respect to the ship.

TABLE 12-4

COMMERCIAL PLEASURE YACHT – UNLIMITED
(PY-U)

RANGE	GROSS TONNAGE	MANNING LEVELS FOR KEY SAFETY PERSONNEL								REMARKS
		MASTER	CHIEF OFFICER	OOW (DECK)	CHIEF ENGINEER	2 ND ENGINEER	OOW (ENGINEER)	RATINGS (DECK DEPT.)	RATINGS (ENGINE DEPT.)	
Unlimited	Any Tonnage	1	1	2	1	1	2	3	3	Any pleasure yacht engaged in trade and operating over an unlimited geographical range is in effect a SOLAS Convention passenger ship and subject to all the applicable requirements of the STCW Convention.

Additional Notes applicable to all Tables:

1. *It is emphasised that the Manning Tables 12-1 to 12-4 given in this subsection are for guidance only and the Tables do not necessarily represent any minimum manning scale. There are many factors and variables to be taken into account in determining the appropriate minimum safe manning level for a Passenger Yacht and it is the responsibility of owners, masters and operators of the vessel to ensure that all relevant factors are taken into consideration when submitting proposal for a Safe Manning Document. In this regard due account also needs to be taken of the fact that minimum safe manning levels do not necessarily provide a sufficient number of crew for the day to day non-safety operations of the vessel.*
2. *In all cases full account shall be taken of relevant IMO Guidelines on Safe Manning including, but not limited to IMO Resolution A.890(21) (as amended from time to time), on the principles of safe manning.*
3. *Gross tonnage, geographical or weather limitations are not of themselves necessarily the main or appropriate criteria in determining safe manning levels, since a vessel operating to a heavy schedule of port calls, regardless of its size, may well need increased levels of manning to maintain appropriate safety standards and marine environment protection, including hours of rest, given the increased workload of the crew under such circumstances.*

12.6 Medical Fitness:

- (1) *All seafarers serving on board vessels to which the Code applies shall be in possession of a valid Medical Fitness Certificate issued or recognised by the Administration.*

12.7 Hours of Work and Rest:

- (1) *All members of the yacht's complement, including the master, shall have minimum rest periods and maximum periods on duty (emergencies excepted) in accordance with the provisions of the STCW Convention, ILO Conventions and national legislation.*
- (2) *Owners and operators of passenger yachts shall ensure that the master, officers and ratings do not work more hours than is safe in relation to the performance of their duties and the safety of the ship in accordance with the provisions referred to in subsection 12.5(1) and the master shall ensure that these provisions are adhered to on board by suitable arrangements with respect to the assignment of duties; manning levels should therefore be such as to ensure that the master, officers and crew are afforded the opportunity to take the minimum rest periods.*
- (3) *The time and place of rest periods should be such as to ensure that such periods can be taken in a suitable environment conducive to achieving an effective rest.*
- (4) *Further guidance about fitness for duty is contained in section B-VIII/1 of the STCW Code.*
- (5) *A record of the actual hours of work performed by the individual seafarer shall be maintained on board, in order to verify that the minimum periods of rest required under applicable international instruments and national legislation have been complied with.*

This page is intentionally added to achieve correct pagination.

CHAPTER 13

MEDICAL CARE AND CARRIAGE OF MEDICAL STORES

13.1 Medical Care for Seafarers:

- (1) *The requirements for on board health and medical care set out in this Chapter include standards for measures aimed at providing seafarers with health protection and medical care as comparable as possible to that which is generally available to workers ashore.*
- (2) *The health protection and medical care shall in principle be provided at no cost to the seafarers.*
- (3) *The employer and master shall ensure that all seafarers are covered by adequate measures providing for health protection and medical care, including essential dental and optical care which-*
 - (a) *ensure the application to seafarers of any general provisions on occupational health protection and medical care relevant to their duties, as well as special provisions specific to work on board ship;*
 - (b) *give seafarers the right to visit a qualified medical doctor or dentist without delay in ports of call, where practicable;*
 - (c) *ensure that seafarers are given health protection and medical care as comparable as possible to that which is generally available to workers ashore, including prompt access to the necessary medicines, medical equipment and facilities for diagnosis and treatment and to medical information and expertise;*
 - (d) *give seafarers the right to visit a qualified medical doctor or dentist without delay in ports of call, where practicable;*
 - (e) *are not limited to treatment of sick or injured seafarers but include measures of a preventative character such as health promotion and health education programmes; and*
 - (f) *minimise the risk of infection and ensure appropriate preventative measures such as immunisation are taken.*

13.2 Provision of On-board Medical Care:

- (1) *The carriage of medical stores and equipment as provided for in this Chapter is designed to provide an appropriate level of primary care for all persons on board pending, where necessary, the provision of shore based medical services.*

13.3 Medical Cabinet:

- (1) *A cabinet or other suitable facility for storing medicines and other medical stores shall be provided and the cabinet, shall be well ventilated and fitted in a place in the crew area of the ship which is-*
- (a) *always dry;*
 - (b) *readily accessible from (but not sited in) the permanent or temporary hospital; and*
 - (c) *not subject to abnormal heat.*
- (2) *The medical cabinet shall be provided with the following-*
- (a) *an outer door with an efficient lock;*
 - (b) *where controlled drugs are to be stored, an inner cupboard fitted with a door and a lock which cannot be opened by the same key as the lock to the outer door;*
 - (c) *suitable arrangements for the storage of the medicines, medical stores and associated measuring devices; and*
 - (d) *a dispensing counter with a surface that can be easily kept clean.*
- (3) *The medical cabinet shall be lit by an electric light (which may be inside or immediately outside it) which enables the contents to be clearly seen.*

13.4 Carriage of Medical Stores:

The ship shall carry on board medical stores and equipment as specified in the Table below-

Table of Medical Stores and Equipment to be Carried

<i>Category of Passenger Yacht</i>	<i>Scale of Medical Stores and Equipment to be Carried</i>
<i>Passenger Yacht 2</i>	<i>Medical stores and equipment as specified for a Category B ship in Annex 1 of MSN 1768⁷⁹.</i>
<i>Yachts (other than Passenger Yachts II)</i>	<i>Medical stores and equipment as specified for a Category A ship in Annexes 1 and 2 of MSN 1768⁵⁶.</i>
<i>All Passenger Yachts</i>	<i>A Medical First Aid Kit for every 100 persons or fraction thereof carried on the ship in accordance with Annex 3 of MSN 1768⁸⁰ and in any case at least one Medical First Aid Kit shall be carried.</i>

⁷⁹ UK Merchant Shipping Notice MSN 1768 – Ship’s Medical Stores, as may be amended from time to time.

13.5 Standards of Medical Stores:

- (1) *All medical stores required to be kept on board ship shall conform to the standards and requirements of the British National Formulary, the British Pharmacopoeia, the European Pharmacopoeia, or the United States Pharmacopoeia, and with the requirements and specifications of MSN 176856.*

13.6 Carriage of Medical Guides:

- (1) *The ship shall carry guides as to the use of medical stores specified in section 13.3 including in particular instructions for the use of antidotes, as specified in MSN 1768.*

13.7 Medical Advice:

- (1) *All ships should carry a complete and up-to-date list of radio stations through which medical advice can be obtained; and if equipped with a system of satellite communication, carry an up-to-date and complete list of coast earth stations through which medical advice can be obtained. Seafarers with responsibility for medical care or medical first aid on board should be instructed in the use of the ship's medical guide and the medical section of the most recent edition of the International Code of Signals so as to enable them to understand the type of information needed by the advising doctor as well as the advice received.*

13.8 Inspection of Medicines and Medical Stores:

- (1) *The medicine chest and its contents, as well as the medical equipment and medical guide carried on board, should be properly maintained and inspected at regular intervals, not exceeding 12 months, by a competent person or authority, who should ensure that the labelling, expiry dates and conditions of storage of all medicines and directions for their use are checked and all equipment functioning as required.*

13.9 Carriage of Doctors or Medically Trained Personnel:

- (1) *Ships carrying 100 or more persons and undertaking international voyages in excess of 600 miles shall carry a qualified medical doctor who is responsible for providing medical care.*
- (2) *In passenger yachts not required to carry a doctor the master shall ensure that any medical attention or treatment administered on board to any person is given either by the master or under his supervision by a person so appointed by him for the purpose provided that the person so appointed shall have received medical training to an appropriate level in accordance with the STCW Convention.*

CHAPTER 14

REQUIREMENTS FOR SAILING VESSELS

14.1 General

- (1) *Sailing vessels as defined in section 1.3 of the Code shall additionally comply with the provisions of this Chapter of the Code in full.*

14.2 Application

- (1) *As per Section 1.3 of the Code, a sailing vessel is a vessel designed to carry sail, whether as a sole means of propulsion or as a supplementary means.*

14.3 Operating Restrictions

- (1) *The vessel's "Statement of Operational Limitations" shall give the maximum wind speed or 'Derived Heel Angle' and reference the vessel's 'Sailing Operations Manual'*
- (2) *Any applicable rig limitations shall also be listed on the statement.*

14.4 Water Freeing Arrangements

- (1) *where the solid bulwark height does not exceed 150mm, specific freeing ports, as defined section 2.15, are not required.*

14.5 Intact Stability

"the 'down-flooding angle' is the angle of heel causing immersion of the lower edge of openings having an aggregate area, in square meters, greater than:-

$$\frac{\Delta}{1500} = \text{where } \Delta = \text{vessels displacement in tonnes}''$$

- (1) *Vessels should comply with the appropriate parts of chapter 4 regarding intact stability in full.*
- (2) *Current Chapter 4 requirements are to be assessed without accounting for the added windage of the sails. Vessels with lifting keels, should meet the requirements of Chapter 4 in the most onerous condition.*
- (3) *Asymmetric ballasting is not permitted whilst sailing*

(4) Vessels shall additionally comply with the following:

14.6 Intact Stability Monohulls

- (1) Curves of statical stability (GZ curves) for at least the Loaded Departure with 100% consumables and the Loaded Arrival with 10% consumables should be produced.
- (2) The GZ curves required by (1) should have a positive range of not less than 90°, where the 'Sail Area Displacement Ratio' is greater than 10 calculated as follows:


$$\frac{A_{sails}}{\nabla \left(\frac{2}{3}\right)} = \text{Sail Area Displacement Ratio}$$

$\nabla =$ Vessel displacement in meters cubed (m³)

$A_{sails} =$ is the area of the full upwind sail plan, including sail overlaps in square meters (m)²

- (3) For vessels where the 'Sail Area Displacement Ratio' is less than 10 calculated as per (2), Where a range of less than 90° exists, the wind speed required to capsize should be calculated to be more than 38 knots as follows:

The heel angle resulting from a steady wind heeling moment corresponds to the intersection of the righting and heeling arm curves, so the heeling arm at the point

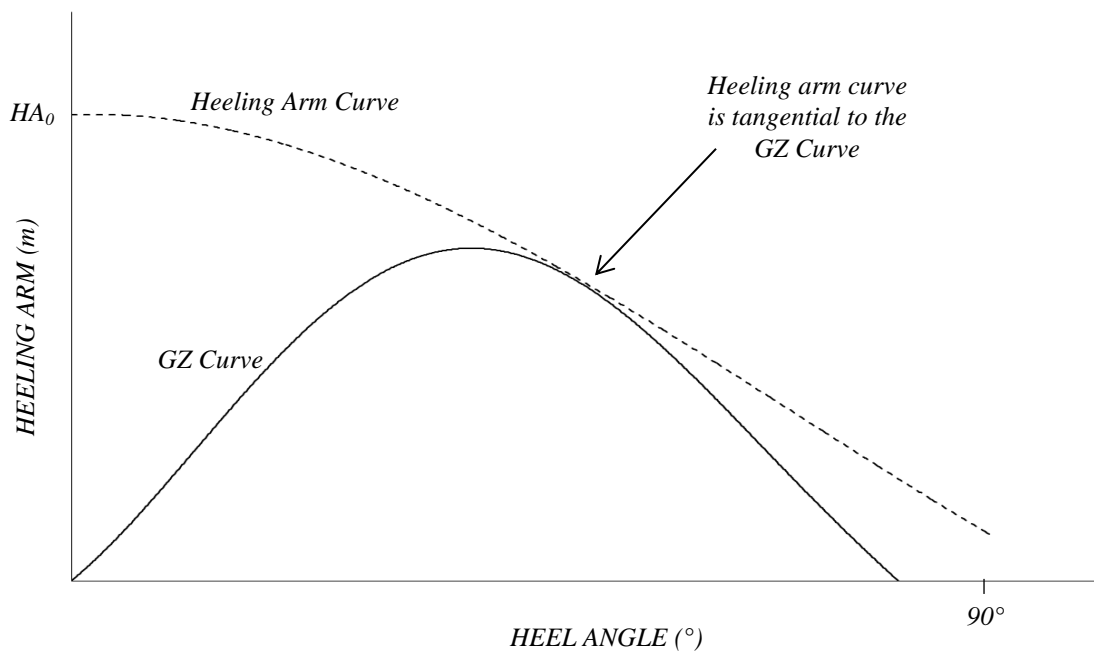

of capsize is defined where the heeling arm curve is tangential to the GZ curve.

The heeling arm curve is defined by the formula:

$$HA_{\theta} = HA_0(\cos\theta)^{1.3}$$

Where

HA_{θ} = Heeling arm at any given angle θ

HA_0 = Heeling arm at 0° where heeling arm curve is tangential to the GZ curve

V is calculated by the formula:

$$V \times 0.514 = v = \sqrt{\left(\frac{\Delta \times 9.81 \times HA_0}{0.5\rho(A_{SAILS}h_{SAILS}C_{SAILS} + A_{HULL}h_{HULL}C_{HULL})} \right)}$$

Where

V = Apparent wind speed in knots

v = Apparent wind speed in meters per second (m/s)

ρ = Density of Air (assumed to be 1.22)

Δ = Vessel displacement in kilograms (kg)

A_{sails} = is the area of the full upwind sail plan, including sail overlaps in square meters (m^2)

h_{sails} = is the height of the centroid of the sail plan above half the draft in meters (m)

C_{sails} = is the maximum sail heeling force coefficient, assumed to be 1.75 (unless proven otherwise)

A_{hull} = is the profile area of the hull and superstructure in square meters (m^2)

h_{hull} = is the height of the centroid of the hull and superstructure area above half the draft in meters (m)


C_{hull} = is the hull heeling force coefficient, assumed to be 1.0 (unless proven otherwise)

- (4) In addition to the requirements of (2) or (3), the angle of steady heel should be greater than 15 degrees (see figure). The angle of steady heel is obtained from the intersection of a "derived wind heeling lever" curve with the GZ curve required by (1).

In the figure:-

'dwhl' = the "derived wind heeling lever" at any angle θ°
 $= 0.5 \times WLO \times \text{Cos}^{1.5}\theta$

where $WLO = \frac{GZ_f}{\text{Cos}^{1.5}\theta_f}$

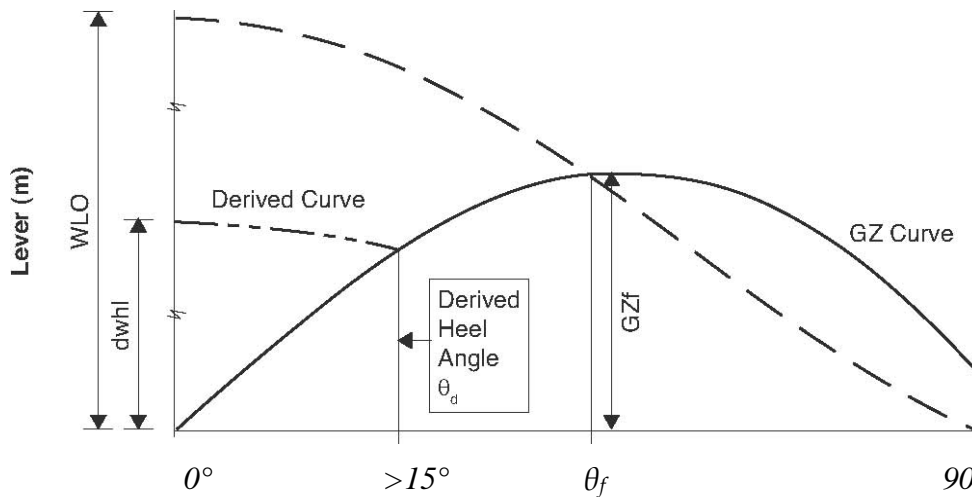

Noting That:

$WLO =$ is the magnitude of the actual wind heeling lever at 0° which would cause the vessel to heel to the 'down flooding angle' θ_f or 60° whichever is least.

$GZ_f =$ is the lever of the vessel's GZ at the down flooding angle (θ_f) or 60° whichever is least.

$\theta_d =$ is the angle at which the 'derived wind heeling' curve intersects the GZ curve. (If θ_d is less than 15° the vessel will be considered as having insufficient stability for the purpose of the Code).

$\theta_f =$ the 'down-flooding angle' is the angle of heel causing immersion of the lower edge of openings having an aggregate area, in square meters, greater than:-

$$\frac{\Delta}{1500} = \text{where } \Delta = \text{vessels displacement in tonnes}$$

All regularly used openings for access and for ventilation should be considered when determining the downflooding angle. No opening regardless of size which

may lead to progressive flooding should be immersed at an angle of heel of less than 40°. Air pipes to tanks can, however, be disregarded.

If, as a result of immersion of openings in a superstructure, a vessel cannot meet the required standard, those superstructure openings may be ignored and the openings in the weather deck used instead to determine θ . In such cases the GZ curve should be derived without the benefit of the buoyancy of the superstructure.

It might be noted that provided the vessel complies with the requirements of (1) to (4) and is sailed with an angle of heel which is no greater than the 'derived angle of heel', it should be capable of withstanding a wind gust equal to 1.4 times the actual wind velocity (i.e. twice the actual wind pressure) without immersing the 'down-flooding openings', or heeling to an angle greater than 60°.

14.7 Damage Stability

- (1) *The maximum assumed wind force (M_{wind}) acting in a damage situation as per Section 4.8(6), shall be calculated so that the 'projected lateral area above the waterline' (A), includes all running/standing rigging sail controls and spars.*
- (2) *The projected lateral area in Section 4.29(10)(c) is to include all running/standing rigging sail controls and spars.*
- (3) *Where applicable, Chapter 4 Part VII requirements should be met whilst under a moment due to wind pressure as calculated by Section 4.29(10)(c).*
- (4) *In order to eliminate the wind heeling moment from the sails in case of damage, 14.18(1) shall be complied with.*

14.8 Equipment Numeral

- (1) *When calculating the equipment numeral, sailing vessels should take into account the additional windage effect of the masts and rigging.*
- (2) *Typically, for square rigged sailing vessels, experience based guidance on approximate increase in anchor mass and cable strength required is:*
 - (a) *for vessels up to 50 meters in length, typically 50% above the requirements for a typical motor vessel having the same total longitudinal profile area of hull and superstructure as the square rigged sailing vessel under consideration; and*
 - (b) *for vessels 100 meters in length and over, typically 30% above the requirements for a typical motor vessel having the same total longitudinal profile area of hull and superstructure as the square rigged sailing vessel under consideration.*
 - (c) *For a square rigged sailing vessel of between 50 and 100 meters in length the increase should be obtained by linear interpolation.*

14.9 Machinery and Electrical Installations

- (1) *Lighting supplied by the emergency source of electrical power shall be provided for illuminating the rigging, sails and sail controls including and dropping/furling in an emergency. The lighting shall be such that the night vision of the watchkeepers is not impaired, and is to be arranged so that it cannot be mistaken for navigation light by another ship. Care should also be given to preventing glare and stray reflections.*
- (2) *Main engines shall have a minimum power to ensure that the vessel has a minimum speed of 6 knots while heading into Beaufort Force 8 weather and corresponding sea conditions.*
- (3) *The sail handling facilities should be equipped to allow a controlled emergency release of the sheets from both locally and from the bridge which shall be supplied by stored power. Sail controls shall have a local secondary means of control in the event of failure.*
- (4) *A control system is to be provided so that the setting and trimming of sails may be carried out from the bridge, and is to be such that, once established, the desired setting and trimming may be automatically maintained. The control system is to provide adequate speed of response to automatically neutralize the sail system in the event of wind conditions which may damage the sail system and endanger the ship.*
- (5) *Lowering or furling of any combination of the sails should be operational from a source of power other than the main source of power. These controls shall be operational at the down flooding angle or 60° whichever is least.*
- (6) *The Emergency Generator, fire pump and bilge pumps should operate at 22.5degrees or greater depending on the vessels specific operating conditions.*
- (7) *Vessels should have lightning strike protection⁸⁰.*
- (8) *Watertight Doors should be able to operate at the maximum steady heel angles.*

14.10 Fire Protection, Detection and Extinction

- (1) *Within the interior of the vessel, the mast should be either insulated directly to A-60 class requirements or contained within a space dedicated to the protection of the mast only, and insulated as follows:*
 - (a) *'A-30' when adjacent to category (1),(2),(3),(4) & (10) spaces as per 6.7(10)(b)(vi);and*
 - (b) *'A-60' when adjacent to cat. (5),(6),(7),(9) spaces as per 6.7(10)(b)(vi).*

⁸⁰ See IEC 60092-401:1980 as amended or IEC 60092-507 as appropriate and Classification Society requirements.

The space and those adjacent shall be fitted with a fully addressable fire detection system and a fixed fire fighting system complying with the relevant provision of the FSS Code.

- (2) *Standing and running rigging should not be located or terminated in Category (11), (9), (7), (6) or (5) spaces. Where this is not possible, the rigging shall be locally protected to A-60 Class.*
- (3) *When applying 6.3(23) for the application of the requirements to furniture on open deck, all sails and rigging equipment shall be considered in the same way as lifesaving appliances.*

14.11 Life-Saving Appliances and Arrangements

- (1) *LSA should not be stowed in any position during normal operating conditions where, if required to be used or float free, rigging, the running rigging, spars or any other structure or equipment would cause an obstruction to its use.*
- (2) *7.4(a) shall be achievable under any combinations of sails within the Sailing Operations Manual.*
- (3) *Equipment shall be provided for the cutting and clearing of the rigging if dismasted.*

14.12 Emergency Procedures, Training and Drills

- (1) *Sail Reduction drills should be conducted in accordance with the vessel's 'Sailing Operations Manual'. These drills should be conducted weekly or within the first 24 hours of the ship leaving a port where one has not been conducted within the last 7 days.*

14.13 Safety of Navigation

- (1) *Subject to any special provisions given in the national legislation every ship to which this Code applies shall comply with the applicable requirements of Chapter V of SOLAS, 1974, as amended.*
- (2) *Special consideration shall be given to 'Bridge Visibility' on sailing vessels in compliance with the Code specifically with regard to the placement of dedicated lookouts which shall:*
 - (a) *have the sole duty, while the ship is underway, of maintaining a lookout,*
 - (b) *be positioned outside the passenger spaces, and*

- (c) *be instructed by the master to keep a continuous lookout, and in particular over any or all (as the case may be) of the areas which are obstructed from the navigating position which the helmsman cannot see.*
 - (d) *the dedicated lookout may be in the wheelhouse, but if positioned outside the wheelhouse and remote they shall be provided with a means voice communication to the helmsman.*
- (3) *Every sailing vessel should carry a masthead anemometer, and an inclinometer, both of which shall be readable from the helms position.*
- (4) *Where the GMDSS radio aerial is located in the mast or rigging, an emergency aerial shall be carried so that in the event of a dismasting, the equipment can be rendered serviceable.*

14.14 Sailing Operations Manual

- (1) *'SAILING OPERATIONS MANUAL' shall be Approved by the Administration and used to indicate the various applicable sail combinations in relation to maximum wind speed & direction. This data should be supported by results from appropriate testing and/or sea trials.*
- (2) *The sailing operations manual should include the following:*
- (a) *General design parameters, environment data and limited operating conditions.*
 - (b) *Sail combination and reefing schedules with their corresponding, or in the case of a multihull, the values of maximum advised mean apparent wind speed, for the reference of the watchkeeper.*
 - (c) *Curves of maximum steady heel angle to prevent down flooding in squalls*
 - (d) *Operational plans should outline the sailing manoeuvres and numbers of trained crew required to conduct them (this will be considered in the requirements for minimum safe manning) including full particulars and plans of automatic operating systems*
 - (e) *The Stability book and Sailing Operations Manual should contain the following statement for the Master:*

The vessel has not been reviewed against damage stability criteria whilst under sail. Additional wind heeling moments from the sails could lead to capsizing after minor damage.

IN THE EVENT OF DAMAGE, ALL SAILS SHOULD BE IMMEDIATELY FURLED OR DROPPED AS APPROPRIATE

14.15 Health and Safety

- (1) *Consideration will need to be given to the function of doors at adverse angles of heel while not making them dangerous to passengers at adverse heel angles.*
- (2) *Crew and passengers should be able to move about the vessel safely at angles up to the 'Derived Heeling Angle'.*
- (3) *Consideration should be given to the protection of persons on board from running rigging, sheets and spars, and in particular the possible flogging of sails and sheets.*
- (4) *Escape routes, muster stations and embarkation stations should be protected from running rigging, sheets and spars.*

14.16 Manning Certification

- (1) *In addition to the requirements of 12.3(2) & (4), In assessing the appropriate level of manning for a passenger yacht the following factors are among those which are to be taken into account:*
 - (a) *Sail control/handling systems onboard (captive winch systems etc)*
 - (b) *Sail areas & numbers of sails & masts*
 - (c) *Type of rig (traditional square rigger, modern sloop etc)*
 - (d) *Skilled crew requirements for maneuvering as per the 'Sailing Operations Manual'*
 - (e) *Obstructed views from the bridge caused by masts and sails (see 14.13(2))*
- (2) *All deck officers should have RYA/MCA Yachtmaster Ocean Certificate of Competence for sailing vessel.*
- (3) *In addition to those described in section 12.3, a sufficient number of Sail Coordinators may be required by the Administration to be carried dependent on the items in subsection (1). Although the ultimate responsibility for the vessel is always with the Master, the on watch Sail Coordinator role is the designated person who's only responsibility is for the number and combination of sails to be set for the prevailing and forecast conditions, staying within the statement of operational limitation related to the sailing and the rig, adhering to the curves of maximum steady heel angle to prevent down flooding in squalls and providing constant reference to the 'Sailing Operations Manual' and Stability Book. Sail Coordinators should hold as a minimum an RYA/MCA Yachtmaster Ocean Certificate of Competence for sailing vessel.*

14.17 Masts and Spars and Standing Rigging

- (1) *Dimensions and construction materials of masts and spars and dimensions of standing rigging including connection to chain plates should be in accordance with the requirements or recommendations of one of the Classification Societies or a recognised national or international standard.*
- (2) *The associated structure for masts and spars (including chainplates, fittings, decks and floors) should be constructed to effectively carry and transmit the forces involved.*
- (3) *Running rigging, blocks, shackles, rigging screws, cleats and associated fittings should be Type approved and sized as per the Classification Societies' satisfaction.*
- (4) *Sails controls (sheets, Halyards), blocks & attachments should be Type approved and sized as per the Classification Societies' satisfaction*
- (5) *Compliance with (1) to (3) & 4 should be confirmed by a design review and approval by one of the Classification Societies (e.g. Rig Design Certificate) which is assigned with the review of the rig.*
- (6) *The Maintenance Manual provided by the mast manufacturer should be reviewed and approved by the Classification Society which is assigned to review the rig design.*
- (7) *A physical survey on the rig stepping procedure and the rig behaviour during sea trials is to be carried out by or on behalf of the Classification Society that is involved with the classification of the vessel's hull.*
- (8) *Annual surveys on the vessel should include reviewing records and history of rig Maintenance*
- (9) *Rig manuals (Rig Behavior Report and Rig Maintenance Manual) to monitor the condition of the rig in accordance with a Maintenance Manual and a planned maintenance schedule. The schedule should include, in particular, regular monitoring of all the gear associated with safe work aloft and on the bowsprit.*

14.18 Sails

- (1) *In order to eliminate the wind heeling moment in case of damage, all the sails for any given sail combination (as per the vessel's Sailing Operations Manual) should be able to be dropped/stowed or furled within 10 minutes under the conditions described in Sub-section 14.9(5).*
- (2) *Adequate means of reefing or shortening sail should be provided.*

ANNEX 1

**CLASSIFICATION SOCIETIES AND OTHER BODIES APPOINTED AS
RECOGNIZED ORGANIZATIONS BY THE CAYMAN ISLANDS SHIPPING
REGISTRY.**

(ABS) **American Bureau of Shipping**
<http://www.eagle.org>

(BV) **Bureau Veritas**
<http://www.veristar.com>

(DNV GL) **DNV GL**
<http://www.dnvgl.com>

(DNV) **Det Norske Veritas**
<http://www.dnv.com>

(GL) **Germanischer Lloyd**
<http://www.gl-group.com>

(LR) **Lloyds Register**
<http://www.lr.org>

(ClassNK) **Nippon Kaiji Kyokai,**
<http://www.classnk.or.jp>

(RINA) **Registro Italiano Navale**
<http://www.rina.org>

This page is intentionally added to achieve correct pagination

ANNEX 2

**TECHNICAL STANDARDS FOR HELICOPTER LANDING AREAS AND
HELICOPTER OPERATING STANDARDS.**

(Available on the REG Website <http://www.redesigngroup.org>
No changes have been made for the 6th Edition)

This page is intentionally added to achieve correct pagination.

ANNEX 3

TABLE SUMMARISING CATEGORIES OF PASSENGER YACHT AND STANDARDS OF STABILITY AND SURVIVABILITY, LSA SCALES, MAXIMUM PERSONS CARRIED AND OTHER RELATED MATTERS.

Category of yacht		Passenger Yacht Unrestricted Engaged in Trade (PY-U)		Pleasure Vessel not Engaged in Trade (PY-P)		PY-1		PY-2	
Operational Area		Unlimited		Unlimited		Prescribed international voyage (see definitions)		60n.m. of a safe haven and 20n.m from land in conditions not exceeding wind force six and sea state five on Beaufort scale	
Damage Stability Standard		<80m L Chapter 4 Part VI	≥80m L Chapter 4 Part II	<80m L Chapter 4 Part VI	≥80m L Chapter 4 Part II	<80m L Chapter 4 Part VI	≥80m L Chapter 4 Part II	<80m L Chapter 4 Part VI	≥80m L Chapter 4 Part II
LSA ⁸¹ ₈₂	≤ 50 Persons	300% Liferrafts + Additional Provisions (Chapter 4 part VII)	300% Liferrafts + Additional Provisions (Chapter 4 part VII)	300% Liferrafts	300% Liferrafts + Additional Provisions (Chapter 4 part VII)	300% Liferrafts + Additional Provisions (Chapter 4 part VII)	300% Liferrafts	300% Liferrafts	
	> 50 & ≤ 99 Persons		Lifeboats (as per Section 7.21)						
	> 99 & ≤ 120 persons	Lifeboats (as per Section 7.21) + Doctor	Lifeboats (as per Section 7.21) + Doctor						Lifeboats (as per Section 7.21) + Doctor

⁸¹ 300% Liferrafts can be 300% Davit Launched Liferrafts or a combination of DLLR & MES as per Section 7.21(3)(d)

⁸² Lifeboats may be carried in place of 300% liferafts and the Additional Provisions of Chapter 4 part VII need not be complied with


ANNEX 4

GUIDANCE MATERIALS MATRIX FOR ACCOMMODATION SPACES, SERVICE SPACES AND CONTROL STATIONS

Type of Space	Control Stations	Stairway Enclosures	Corridors	Accommodation Areas	Service spaces and Garage Spaces	Balconies see note (10)	Included in Calorific value Calculation	Included in Fire Volume Calculation
Category Of Space	1	4	2	3	5, 9, 11	10	1 - 9	1 - 9
Material								
(A) Floor coverings	Annex 1, Part 2	Annex 1, Part 5 Annex 1, Part 2	Annex 1, Part 5 Annex 1, Part 2	Annex 1, Part 2 (PYC 6.4 refers)	Annex 1, Part 2	Annex 1, Part 5 Annex 1, Part 2 Except natural hardwood decking systems See Note (10)		
(B) Primary deck coverings	Annex 1, Part 5 Annex 1, Part 2	Annex 1, Part 5 Annex 1, Part 2	Annex 1, Part 5 Annex 1, Part 2	Annex 1, Part 5 Annex 1, Part 2	Annex 1, Part 5 Annex 1, Part 2	Annex 1, Part 5 Annex 1, Part 2		
(C) Exposed surfaces of walls and ceilings, panel surfaces and ceiling linings, including paints, varnishes, fabrics & veneers (see note 16)	Annex 1, Part 5 Annex 1, Part 2 see notes (5)	Annex 1, Part 5 Annex 1, Part 2 see notes (5)	Annex 1, Part 5 Annex 1, Part 2 see notes (5)	Annex 1, Part 5 Annex 1, Part 2 see notes (5)	Annex 1, Part 5 Annex 1, Part 2 see notes (5)	Annex 1, Part 5 Annex 1, Part 2 see notes (5)	✓	✓ (except Balconies)
(D) Skirting Board	Annex 1 Part 2 Annex 1 Part 5 see notes (5) & (6)	Annex 1 Part 2 Annex 1 Part 5 see note (6)	Annex 1 Part 2 Annex 1 Part 5 see note (6)	Annex 1 Part 2 Annex 1 Part 5 see note (6)	Annex 1 Part 2 Annex 1 Part 5 see note (6)	No Applicable Requirements		✓
(E) Combustible facings, mouldings, decorations	Annex 1 Part 2 Annex 1 Part 5 see notes (5) & (6)	Annex 1 Part 2 Annex 1 Part 5 see note (6)	Annex 1 Part 2 Annex 1 Part 5 see note (6)	Annex 1 Part 2 Annex 1 Part 5 see note (6)	Annex 1 Part 2 Annex 1 Part 5 see note (6)	Annex 1 Part 2 Annex 1 Part 5 see note (6)		✓
(F) Partial Bulkhead	Annex 1, Part 1	Annex 1, Part 1	Annex 1, Part 1	Annex 1, Part 1	Annex 1, Part 1	Annex 1, Part 1		
(G) Wall panel/Lining	Annex 1, Part 1 see note (15)	Annex 1, Part 1 see note (15)	Annex 1, Part 1 see note (15)	Annex 1, Part 1 see note (15)	Annex 1, Part 1 see note (15)	Annex 1, Part 1 see note (15)		
(H) Concealed panel surface (see note 17)	Annex 1, Part 5	Annex 1, Part 5	Annex 1, Part 5	Annex 1, Part 5	Annex 1, Part 5	No Applicable Requirements	✓	
(I) Draught stops	Annex 1, Part 1 see note (15)	Annex 1, Part 1 see note (15)	Annex 1, Part 1 see note (15)	Annex 1, Part 1 see note (15)	Annex 1, Part 1 see note (15)	Not applicable		
(J) Grounds & supports (see note 15)	Annex 1, Part 1 see notes (14) & (15)	Annex 1, Part 1 see notes (14) & (15)	Annex 1, Part 1 see notes (14) & (15)	Annex 1, Part 1 see notes (14) & (15)	Annex 1, Part 1 see notes (14) & (15)	Annex 1, Part 1 see notes (14) & (15)		
(K) Insulation	Annex 1, Part 1 see note (12)	Annex 1, Part 1 see note (12)	Annex 1, Part 1 see note (12)	Annex 1, Part 1 see note (12)	Annex 1, Part 1 see note (12)	Annex 1, Part 1 see note (12)		
(L) Insulation surface	Annex 1, Part 5 see note (13)	Annex 1, Part 5 see note (13)	Annex 1, Part 5 see note (13)	Annex 1, Part 5 see note (13)	Annex 1, Part 5 see note (13)	Annex 1, Part 5 see note (13)		
(M) Curtains and other suspended textiles	Annex 1, Part 7	Annex 1, Part 7	Annex 1, Part 7	Annex 1, Part 7	Annex 1, Part 7	Not applicable		
(N) Upholstered furniture (including Sofas & Chairs)	see note (5)	see notes (2) & (4)	See Note(11)	No Applicable Requirements	No Applicable Requirements	Annex 1, Part 8 see note (9)		
(O) Case furniture (desks, wardrobes, dressing tables, bureaux, dressers etc.)	see note (5)	Not allowed	Not allowed	see note (17)	see note (17)	No Applicable Requirements		
(P) Free standing furniture (tables etc.)	see note (5)	Not allowed	Not allowed	see note (17)	see note (17)	see note (9)		
(Q) Window box surface	Annex 1, Part 5 Annex 1, Part 2 see note (1)	Annex 1, Part 5 Annex 1, Part 2 see note (1)	Annex 1, Part 5 Annex 1, Part 2 see note (1)	Annex 1, Part 5 Annex 1, Part 2 see note (1)	Annex 1, Part 5 Annex 1, Part 2 see note (1)	Annex 1, Part 5 Annex 1, Part 2 see note (1)	✓	✓ see note (1)
(R) GRP surfaces in private Bathroom/Toilet Modules	Not applicable	Not applicable	Not applicable	Annex 1, Part 5 Annex 1, Part 2	Not applicable	Not applicable	✓	✓
(S) Light fixtures	In general no certification required, but to be looked at on a case by case basis, in particular when at ceiling or fixed to bulkhead							
(T) Waste receptacles	Not allowed	Not allowed	Not allowed	Non-combustible	Non-combustible see note (3)	Non-combustible		
(U) Object d'art, planters, paintwork (NEVER TO REDUCE ESCAPE WIDTHS)	Not allowed	see notes (7) & (8)	see note(7)	No Applicable Requirements	Not allowed	No Applicable Requirements		

(to be read in conjunction with Chapter 6 of the Code & MSC/Circ. 1120, Annex, Interpretation of SOLAS Regulations II-2/5 .3 & 6. For guidance only, actual requirements should be taken from the text within chapter 6 of the Code)

Description	FTP Code Part	Test Procedure
Non-combustibility test	FTP Code Annex 1, Part 1	ISO 1182:2010
Smoke and toxicity test	FTP Code Annex 1, Part 2	ISO 5659-2: 2012 and reference to MSC/Circ. 1120
"A","B" & "F" class divisions	FTP Code Annex 1, Part 3	-
Test for fire door control systems	FTP Code Annex 1, Part 4	-
Test for surface flammability	FTP Code Annex 1, Part 5	-
Test for primary deck covering	FTP Code Annex 1, Part 5	-
Test for vertically supported textiles	FTP Code Annex 1, Part 7	-
Test for upholstered furniture	FTP Code Annex 1, Part 8	-
Test for bedding components	FTP Code Annex 1, Part 9	-
Determination of calorific potential	SOLAS II-2/5.3.2.2	ISO 1716:2002

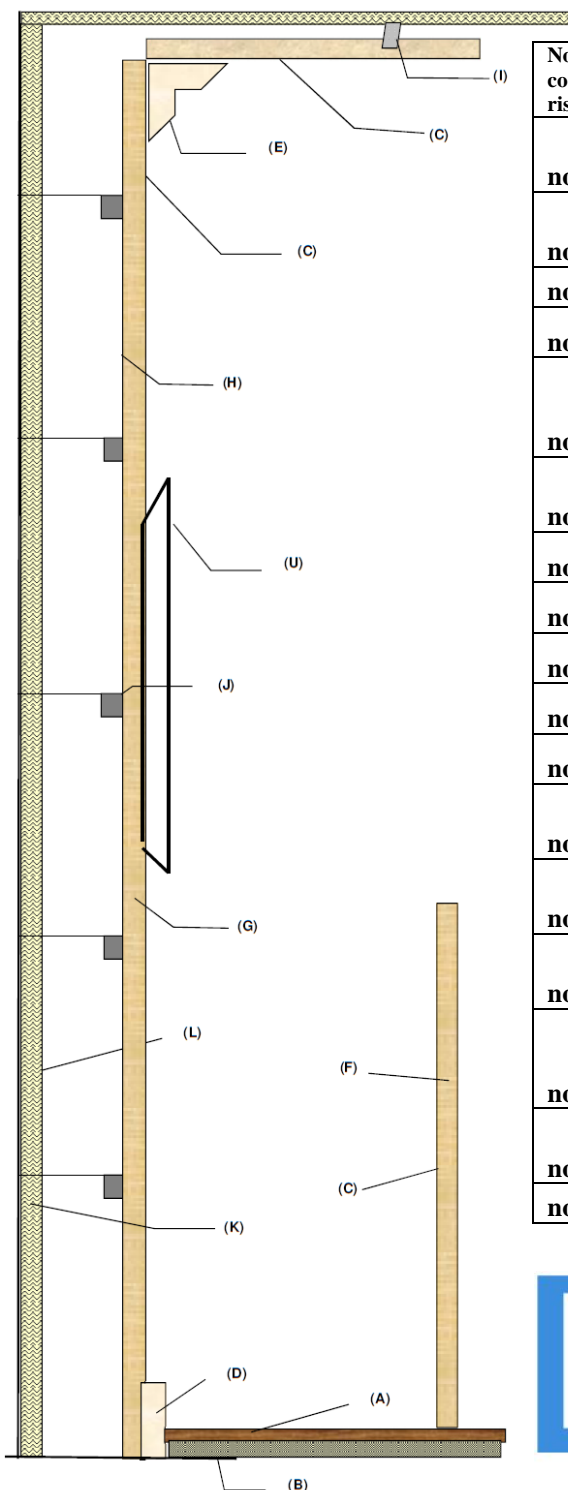

Note that where the words 'No Applicable Requirements' appear, although no compliance is required by the Regulations, use of materials having restricted fire risk as per applicable requirements, is recommended	
note(1):	The windows box has to have a non-combustible structure. Where the structure is faced with a combustible veneer, this item is to be included in the fire volume calculation.
note(2):	Furniture in stairway enclosures shall be limited to seating. It shall be fixed, limited to six seats on each deck in each stairway enclosure, of restricted fire risk, and shall not restrict the passenger escape route.
note(3):	Reference can be made to IACS UI SC166
note(4):	These items are to be constructed with frames of non-combustible materials and, if upholstered are to comply with FTP Annex 1, Part 8
note(5):	Such spaces were not originally meant to be outfitted as accommodation spaces and fire volume calculations were in fact not required. Should they be constructed as such they should be treated as spaces of restricted fire risk as defined in SOLAS II-2/3.40
note(6):	FTP Code, Annex 1, Parts 2 and 5 are applicable only to paints, varnishes and other finishes (Reg. II-2/6.2) (i.e. not veneers or substrate).
note(7):	To be kept to a minimum, be fixed and have properties that are not readily ignitable.
note(8):	Large paintings that form the majority of the bulkhead are to have low flame spread surface.
note(9):	Refer to PYC 6.3 (21), (22) & (23) for details regarding Furniture and furnishings on cabin balconies.
note (10):	For open deck spaces other than balconies attention is to be paid to MSC.1/Circ.1274
note (11):	Not allowed in cabin corridors. In other corridors (i.e. corridors not forming part of an Escape Route), notes 2 and 4 apply.
note (12):	Insulating materials located in cargo spaces, mail rooms and refrigerated compartments of service spaces need not be non-combustible. SOLAS II-2/5.3.1.1 refers.
note (13):	Combustible vapour barriers and adhesives used in conjunction with insulation shall be kept to the minimum quantity practicable. SOLAS II-2/5.3.1.1 refers.
note (14):	Linings, grounds, draught stops and ceilings in mail rooms, baggage rooms, saunas or refrigerated compartments need not be non-combustible. SOLAS II-2/5.3.1.2.1 refers.
note (15):	Grounds in concealed or inaccessible spaces in accommodation, service spaces and control stations shall have low flame spread characteristics in accordance with FTP Code Annex 1, Part 5. SOLAS II-2/5.3.2.4.1.2 refers.
note (16):	See PYC 6.3 (18) for details regarding the possible relaxation of Low Flame-spread characteristics in areas appropriated for the use of the Owners and Guests, subject to agreement by the Flag Administration.
note (17):	Refer to PYC 6.7(1) (i) & (ii) for detailed requirements



The content of Annex 4 is generously provided by Lloyds Register to the appreciation of the Red Ensign Group (REG).

This page is intentionally blank

